

**COMPASSING, MAGNETOMETRY AND DEAD
RECKONING SOLUTIONS**

Sensing Earth's magnetic field

2015 Catalog

Honeywell delivers real sensor solutions you can count on

Honeywell's Magnetic Sensors are among the most sensitive and reliable low-field sensors in the industry. Our magnetic sensors are designed to accurately detect the direction and magnitude of external magnetic fields for compassing and magnetometry applications. From discrete sensors for low-cost, high volume applications, to high performance solid-state compasses, magnetometers and dead reckoning solutions, Honeywell magnetic sensor products operate on nearly any platform.

Honeywell combines the time-tested reliability of our technology with industry proven solid-state magnetic sensors and dead reckoning solutions. Our sensors are ruggedly designed to function optimally in a wide variety of environments and products.

Honeywell offers a full line of magnetic sensor components, modules, compasses, and dead reckoning solutions. These products are developed and manufactured in accordance with ISO and Six Sigma methodologies. We understand customer needs and aim to exceed expectations. All of our products are backed by Honeywell, a global leader in sensor manufacturing, technology and quality.





Honeywell magnetic sensors utilize world-class technology

Honeywell's magnetic sensors, designed with Anisotropic Magnetoresistive (AMR) technology, provide significant advantages over traditional sensors. They are extremely sensitive, low field, solid-state magnetic sensors designed to measure direction and magnitude of Earth's magnetic fields, from 27 micro-gauss to 8 gauss (0.8 milli-Tesla).

Our magnetoresistive sensors are sensitive enough to determine the change in magnetic fields due to the presence of nearby ferromagnetic objects. With a bandwidth up to 5MHz, our sensors detect vehicles and other ferrous objects, even at high speeds.

Honeywell's dead reckoning navigation products provide a practical and cost-effective means for positioning in GPS-denied environments. Our advanced DRM® technology for personnel on foot utilizes algorithms that include human motion modeling, gyro stabilization, Kalman filter-based calibration and data blending. Low power consumption and small size make DRM® products very effective in critical man-portable applications.

Honeywell's magnetic sensor-based products are excellent solutions in many applications other than simple magnetic field compassing, such as platform leveling or proximity detection.

Magnetoresistive sensors have capabilities that include:

- Detecting And Measuring The Strength Of A Magnetic Field
- Using Earth's Field For Compassing And Navigation
- Position Sensing – Linear, Angular And Rotary Displacement
- Current Sensing

Applications:

- Compassing - Automotive, GPS, Watches, Antenna Positioning, Binoculars, Goggles, Thermal Imaging, Laser Range Finders, Surveying
- Navigation - Vehicle Navigation Systems, Air/Marine/Land, Drones, Radio Controlled Helicopters & Aircraft.
- Position Sensing - Valve Control, Displacement Sensing, Water Metering
- Vehicle Detection - Parking Meters, Electronic Traffic Signals
- Security - Metal Detectors, Magnetic Anomaly Detection
- Dead Reckoning - Backup Navigation For GPS Receivers
- Others – Medical Devices, Current Sensors, Etc.



Honeywell's magnetoresistive sensors are able to sense Earth's magnetic field (~0.6 gauss) and provide the sensitivity for enhanced accuracy and performance. Honeywell offers 1-, 2- and 3- axis magnetic sensors for low field linear applications and small size.

Features and benefits of HMC components

Reliable: Honeywell's HMC components have a proven Wheatstone bridge configuration that converts magnetic fields into a millivolt output. These wheatstone bridges are passive components that don't emit any fields or broadband noise. HMC components are extremely shock and vibration tolerant. Potential failure modes may be related to electro-static discharge due to customer handling.

Resolution: The HMC sensors feature very low noise floors for their size. Typical resolution ranges from 27 to 120 microgauss.

Solid-state: The usage of semiconductor processes allows us to manufacture the smallest sensor devices to reduce board assembly costs and improve reliability and ruggedness compared to larger wire wound fluxgates.

Cost effective: Semiconductor manufacturing allows us to fabricate millions of these high performance solutions in a cost efficient way. Our sensors are specifically designed to be an affordable solution for high volume OEM applications.

Set/Reset Straps: Patented on-chip set/reset straps reduce effects of temperature drift, non-linearity errors and loss of signal output due to the presence of high magnetic fields. This feature provides the benefit of an insurance policy against high stray fields.

Offset Straps: Patented on-chip offset straps may be used to eliminate the effects of hard iron distortion, and to implement a closed loop magnetometer circuit for high performance applications.

Honeywell's Magnetoresistive Components Application Matrix

Design Criteria for HMC Components			
Application	Size (Small/Smaller/Smallest)	Price (Low/Lower/Lowest)	Performance (Good / Better / Best)
General Compassing	HMC1022 / 1043L, 1052L / 5883L, 5983	HMC1043L / 1022, 1052L / 5883L, 5983	HMC1043L, 1052L / 1022, 5883L, 5983/1002
Compassing- Automotive	HMC1022/ 1052L, C1043L, 5983	HMC1022/ 1052L, C1043L, 5983	HMC1052L / 1022, 5983
Compassing- Hand Held, GPS	HMC1022 / 1043L, 1052L / 5883L, 5983	HMC1043L / 1022, 1052L / 5883L, 5983	HMC1052L / 1022, 1043L / 5883L, 5983
Attitude Reference	HMC1002 / 1022 1043L, 1052L	HMC1002, 1043L / 1022 / 1052L	HMC1052L / 1022 / 1002, 1043L
Metal Detectors	HMC1021S / 1041Z / 1052L, 5983	HMC1021S, 1041Z / 1052L	HMC1021S / 1041Z / 1052L
Vehicle/Traffic Detection	HMC1021S / 1041Z / 1052L / 1043L, 5983	HMC1041Z / 1021S /1052L	HMC1052L / 1041Z, 1021S / 1001
Current Sensing	HMC1021S / 1052L / 1052L		
Vertical (Z- axis) Sensing	HMC1001, 1021Z, 1051Z / 1051ZL / 1041Z	HMC1001 / 1051ZL, 1051Z / 1021Z, 1041Z	HMC1051Z, 1051ZL / 1021Z, 1041Z / 1001
Position Sensing	HMC1501, 1512	HMC1512 / 1501	HMC1501, 1512

Last digit in part number suffix denotes the number of axis on the sensor.

Low Field High Precision Linear 1- and 2- Axis Analog Magnetic Sensors HMC1001 / HMC1002 / HMC1021S / HMC1021Z / HMC1022


The HMC100X and HMC102X magnetic sensors families are our legacy products that emphasize performance over size. Configured as a four-element wheatstone bridge, these magnetoresistive sensors convert magnetic fields to a differential output voltage, capable of sensing magnetic fields as low as 27 μ gauss. The sensors offer a small, low cost, high sensitivity and high reliability solution for low field magnetic sensing.

The Honeywell HMC100X family of magnetoresistive sensors offers extreme sensitivity and reliability for high performance applications. They are an ideal solution for linear, low-field

magnetic sensing due to its capabilities to convert magnetic field strengths into a differential output voltage, and sensing magnetic fields as low as 27 μ gauss.

The HMC102X family of magnetoresistive sensors converts magnetic fields to a

linear representation of output voltage, offering a cost effective solution for automotive and hand-held compassing applications. These sensors offer a smaller, low cost, high sensitivity and high reliability solution for magnetic field strength sensing.

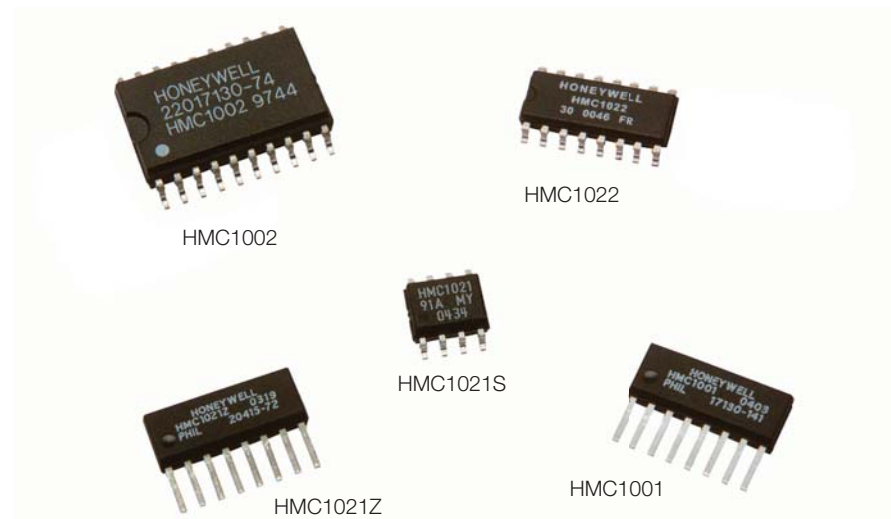



Honeywell's Magnetoresistive Components Application Matrix

	Analog				Units
	HMC100X	HMC102X	HMC104X	HMC105X	
Sensitivity*	3.2	1.0	1.0	1.0	mV/V/Gauss
Field Range**	± 2	± 6	± 6	± 6	Gauss
Field Resolution**	27	85	120	120	μ Gauss
Linearity (± 1 G)	0.1	0.05	0.05	0.05	% FS
Supply Voltage (typ.)	5 - 12	5 - 25	1.8 - 25	1.8 - 25	Volts
Set/Reset Current	3.0	0.5	0.5	0.5	Amps
Offset Strap Coil Constant	51	4.6	10	10	mA/gauss
Orthogonal Axis Alignment	1.5	1	<0.01	<0.01	Degree
Cross Axis Effect	0.5	0.3	0.3	3	%
Size	12.7x7.3x2.5	10x3.9x1.5	3x3x0.8	3x3x1	mm
Board Area (2 Axis)	128	60	10	15	mm ²

* Sensitivity: If the sensitivity is defined as 1.0 mV/V/gauss, in the presence of a 1 gauss magnetic field with 3 volts applied to the sensor, the output of the sensor will be 3 mV. If in the presence of only 0.5 gauss magnetic field, the output of the sensor would be 1.5 mV.

** For reference purposes, the earth's magnetic field is typically 0.6 gauss.

Small Size 1-, 2- and 3- Axis Analog Magnetic Sensors HMC1041Z / HMC1043L / HMC1051Z / HMC1051ZL / HMC1052L / HMC1053

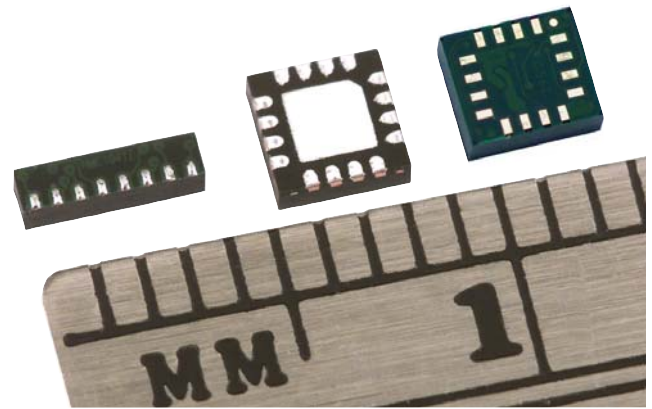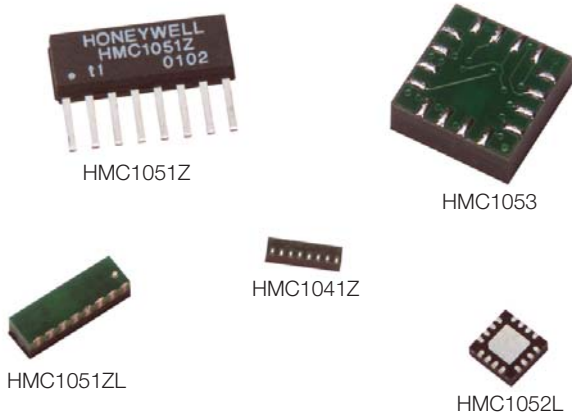

HMC1041Z, HMC1052L, HMC1043L

The HMC104X and HMC105X family of magnetoresistive sensors are ideal solutions for applications requiring high precision and small sensors. These sensors offer a compact and highly reliable solution for low field magnetic sensing.

Honeywell's magnetic sensors are optimized for low-cost and include several miniature package configurations; one axis (HMC1041Z, HMC1051Z, HMC1051ZL), two axis (HMC1052L), and three-axis

(HMC1043L, HMC1053). The advantages of these patented chips include orthogonal precision two-axis sensing (HMC1052L) in miniature surface mount package. Each of the magneto-resistive sensors are configured as a four-element wheatstone bridge to convert magnetic fields to differential output voltages and include patented on-die straps for offset and set/reset functions.

The HMC104X family of very small size magnetoresistive sensors permits cost effective, high performance and space-

efficient personal navigation system designs for small, portable products like hand-held devices. The subminiature size and low-height (1.05 mm) of the HMC1041Z makes this sensor ideal for highly integrated, portable products like GPS receivers and watches. The HMC1043L incorporates three magnetoresistive sensors in a 3 x 3.5 x .9 mm 16-pin LCC package. This cost effective, precision sensor combination is perfect for commercial, industrial, automotive, and aerospace applications.

For more information visit our website at www.magneticsensors.com

HMC5883L 3-Axis Compass IC


HMC5983 3-Axis Compass IC

Industry-leading accuracy, reliability and resolution

The Honeywell HMC5883L and HMC5983 are small sensors designed for low-field magnetic sensing with a digital interface for applications such as low-cost compassing and magnetometry.

The HMC5883L and HMC5983 are magnetic sensors in a 3.0x3.0x0.9 mm surface-mount 16-pin leadless chip carrier (LCC) that includes Honeywell's state-of-the-art, high-resolution magneto-resistive sensors with automatic degaussing (demagnetizing) strap

drivers, offset cancellation and a 12-bit ADC for high resolution earth field sensing. Utilizing Honeywell's anisotropic magneto-resistive (AMR) technology, the solid-state HMC5883L and HMC5983 feature advanced precision in axis sensitivity and linearity and are designed to measure both the direction and the magnitude of Earth's magnetic fields. Applications for the HMC5883L and HMC5983 include Auto Navigation Systems and Personal Navigation Devices.

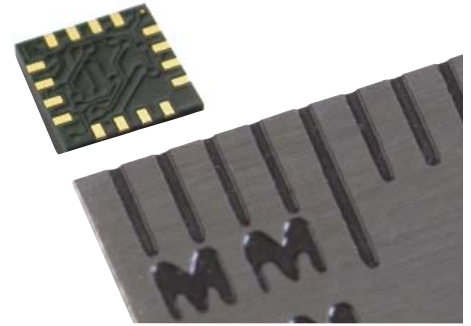


HMC5883L / HMC5983

Comparison of HMC5883L and HMC5983

Features	Benefits	HMC5883L	HMC5983
12-Bit ADC Coupled with Low Noise AMR Sensors Achieves 2 milli-gauss Field Resolution in ± 8 Gauss Fields	Enables 1° to 2° Degree Compass Heading Accuracy	X	X
Built-In Self Test	Enables Low-Cost Functionality Test after Assembly in Production	X	X
Low Voltage Operations (2.16 to 3.6V) and Low Power Consumption (100 μ A)	Compatible for Battery Powered Applications	X	X
Built-In Strap Drive Circuits	Set/Reset and Offset Strap Drivers for Degaussing, Self Test, and Offset Compensation	X	X
I2C Digital Interface	Popular Two-Wire Serial Data Interface for Consumer Electronics	X	X
Wide Magnetic Field Range (± 8 Oe)	Sensors Can Be Used in Strong Magnetic Field Environments with a 1° to 2° Degree Compass Heading Accuracy	X	X
Software and Algorithm Support Available	Compassing Heading, Hard Iron, Soft Iron, and Auto Calibration Libraries Available	X	X
Lead Free Package Construction	RoHS Compliance	X	X
Fast 160 Hz Maximum Output Rate	Enables Pedestrian Navigation and LBS Applications	X	
Fast 220 Hz Maximum Output Rate	Enables Pedestrian Navigation and LBS Applications		X
Temperature Compensated Data Output and Temperature Output	Automatically maintains sensor's sensitivity under wide operating temperature range		X
Automatic Offset Compensation	Maximizes sensor's full dynamic range and resolution		X
SPI Interface	Faster than I2C and allows multiple devices on one bus		X


Magnetic Position Sensors

HMC1501 / HMC1512

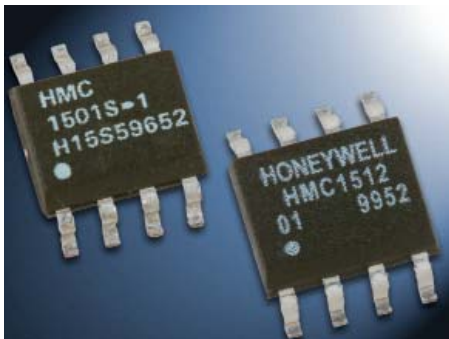

Linear, Angular, Rotary Displacement Sensors HMC1501 / HMC1512

The HMC15XX family of saturated mode magneto-resistive sensors are non-contact sensors capable of measuring the angular direction of a magnetic field with resolution beyond 0.07°. The sensors measure only field direction to avoid insensitivities to temperature, shock, and vibration and magnetic-source gap variations. Unlike encoder

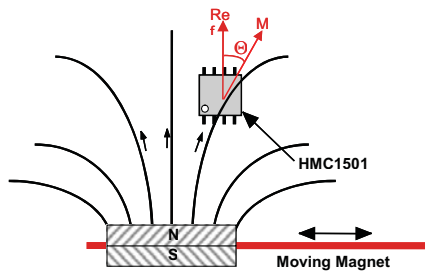

devices, these sensors know the exact position and do not require indexing. Rare Earth magnets such as Neodymium or samarium cobalt types can be substituted with cost-effective Alnico or ceramic type magnets in typical applications such as linear displacement, angular displacement, motor control, valve position, and water metering.

Magnetic position sensors measure the angle and direction of a magnetic field vs. the strength and direction of a magnetic field.

Features and benefits

- Non-contact, power on position sensor
- Low power ~ 5mW
- Insensitive to field strength variations in magnet
- Wide range of span possible
- No moving parts
- Linear, angular and rotary applications
- No need to procure expensive rare-earth magnets

Angular range:

HMC1501 - Angular range of $\pm 45^\circ$ with $< 0.07^\circ$ resolution.

HMC1512 - Angular range of $\pm 90^\circ$ with $< 0.05^\circ$ resolution.

Speed:

These saturated mode sensors retain a DC to 5MHz frequency response with a minimum of 80 gauss magnetic field applied.

Size:

SOIC-8 surface mount packages


Signal output:

Full scale output range of 120mV when provided with a 5V supply

Available in Tape and Reel


For more information about Honeywell's Position Sensors visit our website at www.magneticsensors.com and see application note AN211.

Shaft Position Detection

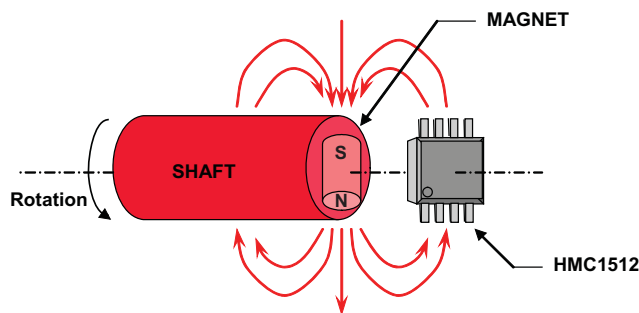

+/- 90 Degrees with a single HMC1512
Full 360 Degree Sensing with an Additional Hall Sensor

Linear Position Sensor Using Multiple HMC1501 or HMC1512

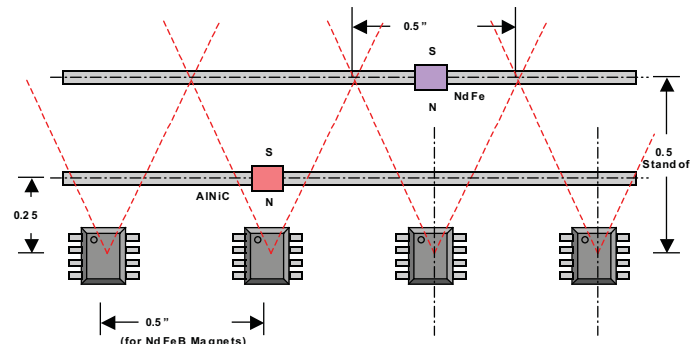


Three-Axis Magnetometers

HMC2003 / HMR2300 / HMR2300R



Honeywell magnetometers provide an excellent means of measuring both magnetic field intensity and direction, using our proven Anisotropic Magnetoresistive (AMR) sensors. These solutions offer both static and alternating field measurements up to 5MHz and permit magnetometer designs emphasizing advantages of small size, high sensitivity, fast response, low cost, and reliability over other magnetometer alternatives.

Magnetometer applications include process control, laboratory instrumentation, anomaly detection, traffic and vehicle detection, security systems, compassing, magnetic ink recognition, current sensing, and motion detection.

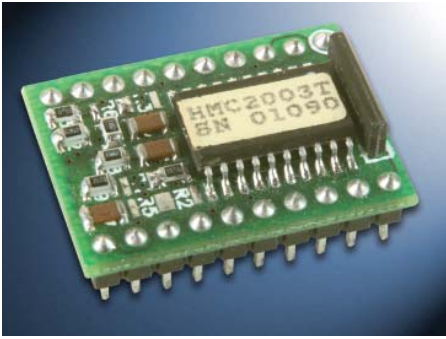

HMC2003 3-Axis Analog Magnetometer

The HMC2003 is a complete, 3-axis magnetometer with analog output in a 20-pin hybrid DIP package. With Honeywell's sensitive HMC1001 and HMC1002 magnetoresistive sensors, and precision instrumentation amplifiers, it measures x, y and z-axis magnetic fields. In addition, Honeywell's patented on-chip offset and set/reset straps are accessible for consistent and advanced processing applications.

Features and benefits

Small size: DIP-20 footprint (1 in. x 0.75 in.) allows easy insertion into system-level boards, reducing development costs.

Solid state: All components are solid state and DC operated, improving reliability, EMI performance, and ruggedness compared to fluxgate sensors.

Dynamic range: Accurately measures field from 40 microgauss to ± 2 gauss with factory calibrated 1V/gauss outputs.

Low noise: Instrumentation amplifiers with 1kHz low pass filters rejects unwanted noise.

Internal voltage reference: An externally accessible +2.5V (zero gauss) reference improves measurement accuracy and stability. An on-board excitation current source reduces temperature errors for consistent performance.



HMR2300 Smart Digital Magnetometer

With extremely low magnetic field sensitivity (<70 micro-gauss, <7 nano-Tesla) capability and a user configurable command set, the HMR2300 solves a variety of problems in custom applications. Honeywell's 3-axis smart digital magnetometer detects the strength and direction of the external magnetic field and interfaces with computer/controller digital ports. Three independent magnetic sensors are oriented orthogonally to sense the x, y and z-axis magnitudes of the magnetic field. The bridge outputs are then converted to a 16-bit digital value using an internal A/D converter.

Features and benefits

Field range: ± 2 Gauss


Flexible: Microcontroller-based sensor system with RS232 or RS485 interfaces.

Simple to use: Just plug and play

Field resolution: <70 μ Gauss

Accuracy over ± 1 Gauss: $<0.5\%$
FS output rate selectable: 10 to 154 Samples/Sec.

Demo Kits - A Development Kit includes one magnetometer module in an aluminum enclosure, cabling with power supply, Windows™ demonstration software for a remote PC, and a user's guide.

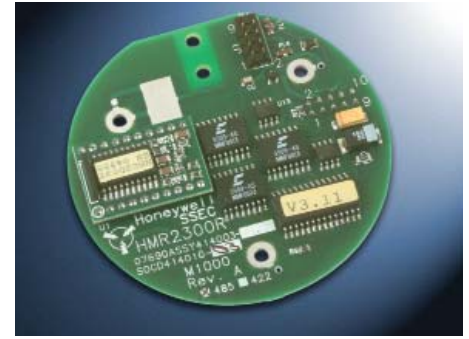

HMR2300R 3-Axis Strapdown Magnetometer

The HMR2300R detects the direction and strength of Earth's magnetic field and communicates the x, y and z components directly via serial bus. Due to Honeywell's round strapdown design as opposed to a gimbaled flux valve, it has no moving parts to damage or wear out during severe flight conditions. The HMR2300R offers an ideal replacement for flux valve sensors in avionics systems. Also includes 55 bytes of EE prom locations available for data storage.

Features and benefits

Flexibility: RS422 or RS485 interface choices

Accuracy: <70 micro-gauss resolution



HMR2300 Demo Kit

Integrated Compassing Solutions

Our extensive experience in fabricating magnetoresistive sensors allows us to develop electronic compass modules that are suited for land, sea and airborne applications. Honeywell offers a complete line of HMR compass modules from the basic HMR3300 three-axis electronic compass to the HMR3601 with ± 80 degrees of tilt compensation. Our HMR compass modules offer high accuracy compassing solutions.

Applications include land or maritime navigation, GPS receivers, laser rangefinders, robotic vehicles, antenna alignment, camera control and other personal, vehicle, and aircraft platforms.

Development kit versions are offered for each HMR compass product for evaluation and demonstration needs.

Hard Iron & Soft Iron Calibration

Each compass product includes hard iron calibration routines to compensate for distortion due to nearby ferrous objects and stray fields, such as vehicles. Hard iron calibration is compensation for magnetic distortion due to permanent magnets or D.C. electromagnetic effects. Soft iron calibration is compensation for magnetic distortion due to induced magnetism in nearby ferrous metals. Common magnetic materials include: iron, steel, nickel and cobalt. Materials such as aluminum, titanium, brass and plastics cause no magnetic interference.

2-Axis vs. 3-Axis Compass Solutions

Electronic compass solutions solve for magnetic heading by measuring the earth's horizontal magnetic field. By keeping the 2-axis modules approximately level, maximum heading accuracy is achieved. For applications where compass modules will not be level, a 3-axis, tilt compensated compassing solution is recommended. These 3-axis compass modules perform an "electronic gimbaling" function by adding the third magnetic axis and a tilt sensor for a gravity vector reference. Tilt sensors are made of either fluidic sensors or MEMS (Micromachined Electro-Mechanical Systems) accelerometers. Quality of the tilt measurement contributes to precision compass outputs. For specialized compass solutions, Honeywell offers the HMC line of linear-mode magnetic field sensor devices to create two and 3-axis compass designs.

For more information or application notes, visit our website at www.magneticsensors.com

Digital Compass Solutions


HMC6343

HMC6343 Digital Compass Solution

The Honeywell HMC6343 digital compass circuit is a 3-axis magnetic and 3-axis accelerometer compassing solution with tilt compensation. This 9.0mm x 9.0mm x 1.9mm multi-chip module has a I2C UART interface plus command compatibility with the HMR3300/3400 compass solutions. The HMC6343 contains all sensors, microcontroller, and analog support circuits; plus all the firmware for heading computation and hard-iron calibration.

Applications

- Consumer electronics
- Hand held devices (cell phones, PDAs, watches, handheld GPS)
- Compassing
- Integration with GPS
- Vehicle compassing and telematics
- Satellite dish antenna positioning

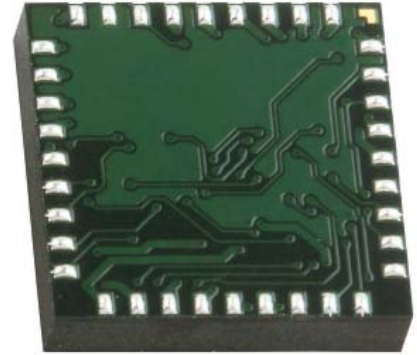

Features and benefits

Integration: Drop-in, plug and play feature allows for more high volume production. 3-Axis Magnetic Sensors plus 3-axis accelerometers with Electronics and Microprocessor

Size: HMC6343 comes in a Miniature 9.0 x 9.0 x 1.9mm Pin LCC Package

Power: 2.6 to 3.7 volt supply voltage for battery operation

Performance: 2.5 to 3 degrees typical compassing accuracy at level

Honeywell's Compassing Solutions Matrix

	3 Axis with Tilt Compensation		
	HMC6343	HMR3300	HMR3400
*Accuracy (At Level)	± 2°	± 1°	± 1°
Size	9x9x1.9mm	1"x1.45"x0.4"	0.6"x1.5"
Tilt Range	± 80°	± 60°	± 60°
Resolution	0.1°	0.1°	0.1°
Repeatability	0.3°	± 0.4°	± 0.4°
Interface	I ² C	UART/SPI	UART/SPI
Power	2.7 to 3.6 V	6 to 15 VDC	5 VDC, 25mA
Temp Range	-40° to 85°C	-40° to 85°C	-40° to 85°C
Magnetic Field Range	± 1.5G	± 2G	± 2G
Hard Iron Cal	Y	Y	Y
Soft Iron Cal	N	N	N
Gyro Stabilized*	N	N	N
World Magnetic Model	N	N	N

*Typical



HMR3000 Digital Compass Solution


The HMR3000 is an electronic compass module that provides heading, pitch and roll output for attitude reference systems. Honeywell's solid state magnetoresistive sensors make this strapdown compass both rugged and reliable. The HMR3000 achieves a response time up to 20 Hertz allowing for faster updates compared to gimballed flux gates.

An optional development kit is available for the HMR3000 with power supply, serial port cable and PC demo software.



HMR3000 Demo Kit

HMR3000	HMR3500 TruePoint™	HMR3601
± 0.5°	± 1°	± 0.5°
1.5"x4.2"x0.88"	2"x1.5"x0.5"	1"x1.04"x0.54"
± 40°	± 80°	± 80°
0.1°	0.1°	0.1°
± 0.3°	TBD	TBD
RS232/485	RS232	RS232
6 to 15 VDC	5V to 12V Nom.	5 VDC ± 5%
-20° to 70°C	0° to 70°C	-40° to 85°C
± 1G	± 0.7G	± 0.9G
Y	Y	Y
N	Y	Y
N	N	Y
N	Y	Y

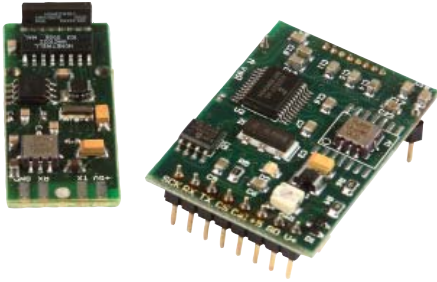


HMR3300 / HMR3400 Digital Compass Solutions

The Honeywell HMR3300, and HMR3400 compass solutions are compact printed circuit boards that plug into platforms with a UART interface and communicate data in ASCII format. The HMR3300 is a 3-axis, tilt compensated electronic compass that adds a 2-axis accelerometer for enhanced performance up to a $\pm 60^\circ$ tilt range. The HMR3400 is a reduced size version of the HMR3300 offering lower power consumption and increased miniaturization. Response time for the HMR3300 and HMR3400 is 8Hz.

Development kits are available for the HMR3200 & HMR3300, which include a plug-in circuit board with an RS232 output.



HMR3300 Demo Kit

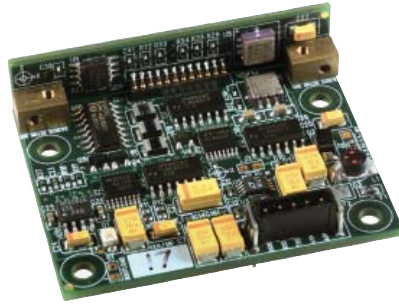

HMR3500 TruePoint™ Digital Compass Solution

The Honeywell HMR3500 electronic compass is a 3-axis digital compass module with azimuth accuracy of 1 degree with 0.1 degree resolution and 0.5 degree repeatability, tilt range of $\pm 80^\circ$. HMR3500 includes closed loop magnetometers, world magnetic model for declination, configurable mounting orientation, hard and soft iron compensation. Update rates to 25 Hz for pitch, roll and heading.

A development kit is available, which includes DB9 data and power cable, RS232 interface, Windows® CompassHost test software, and manual with software protocol message descriptions.



HMR3500 Demo Kit



HMR3601 μPOINT® Gyro-Stabilized Digital Compass Solution

The Honeywell HMR3601 is a gyro-stabilized digital magnetic compass that combines the latest gyro technology with advanced digital magnetic compass hardware and software. HMR3601 features a MEMS silicon rate gyro built into the z-axis. The benefit of gyro stabilization is the ability to overcome magnetic transient disturbances. HMR3601 includes closed loop magnetometers, hard and soft iron compensation, world magnetic model for declination (variation), and high mechanical shock tolerance.

A development kit is available, which includes DB9 serial data and power cable, user manual, Windows® host test program with data recording and graphic data display, direct RS232 interface and, alternate connector attachment boards and brass base plate with mounting screws and strain relief.

Dead Reckoning Module DRM® 4000L



Honeywell's Dead Reckoning Modules (DRM) provides a positioning data for personnel on foot (pedestrians) in environments where GPS data is either unreliable or cannot be used. The DRM units provide reliable, self-contained positioning data, in a compact, efficient form factor, that can be easily attached and carried by persons on foot. These products are provided as components for integration with other equipment such as RF data links and map displays.

The DRM is a miniature, self-contained, electronic navigation unit that provides the user's position relative to an initialization point. The DRM is the first commercially available and practical implementation of drift-free dead reckoning navigation for use by personnel on foot. It is specifically designed to supplement GPS receivers during signal outages. You still know where personnel are located even when GPS is blocked by nearby buildings, heavy foliage, or even inside many structures.

The DRM products contain options including a tilt-compensated magnetic compass, electronic pedometer and barometric altimeter to provide a continuous deduced position. A microprocessor performs dead reckoning calculations and includes a Kalman filter to combine the dead reckoning data with GPS data when it is available. The filter and other proprietary algorithms use GPS data to calibrate dead reckoning sensors for typical dead reckoning accuracy of 2% to 5% of distance traveled, entirely without GPS. Options for the system integrator include a selection of voltage input ranges, CMOS or RS232 interface, data logging, and special software functions. In addition to horizontal position data, compass azimuth, tilt (pitch and roll), and barometric altitude are available.

Calibration after integration with other electronics during product manufacturing is required. These devices are intended for use by personnel on foot, and are not for use on vehicles.



DRM 4000L Dead Reckoning Module

Honeywell's newest and most advanced pedestrian navigation product is the DRM 4000L designed for GPS-denied man-portable navigation. The DRM 4000L is a smaller, lower cost product enabling a wider variety of usage scenarios from previous designs. The DRM 4000L is a state-of-the-art dead reckoning device using patented motion classification algorithms to analyze walking motion, and compensate for unique user kinematics as required. The 2 x 2 x 0.5 inch size of the DRM 4000L enables man-portable applications like personnel tracking, disaster relief operations, safe pathway guidance and mapping tasks. Applications include: first responders, public safety, police and fire, forestry, medical patients, utility workers and more.

The DRM 4000L provides an internal Kalman filter for integrating onboard sensors plus external GPS data (NMEA0183 format), and nominally provides position accuracy of 2% of distance traveled with GPS and sensors. The sensors onboard include 3 gyros, 3 accelerometers, 3 magnetometers, and a barometric altimeter for both horizontal and vertical position location. By combining the DRM 4000L with a GPS receiver, position location is ascertained in normal, GPS-denied, and GPS reflection environments. DRM 4000L is available as an OEM circuit card assembly with an RS 232 interface or as a demonstration kit with a USB output.

Reduction of Hazardous Substances (RoHS) Compliance

Visit our website at:
www.magneticsensors.com for the latest updates on RoHS compliance.

Export Classification Compliance Number (ECCN) Matrix

All products included in this catalog are subject to United States export regulations. For products subject to the Export Administration Regulations (EAR), an Export Control Classification Numbers (ECCN) is listed below. The schedule B number for our magnetic sensor products is 9014.10.9080.

Export Classification Matrix

ECCN #	Product Name
6A996	HMC1001, HMC1002, HMC2003, HMR2300, HMR2300r
EAR99	HMC1021S, HMC1021Z, HMC1022, HMC1041Z, HMC1043L, HMC1051Z, HMC1052L, HMC1053, HMC1501, HMC1512, HMC5883L, HMC5983, HMC6343
7A994	HMR3000, HMR3300, HMR3400, HMR3500, DRM4000L HMR3600, HMR3601

Honeywell reserves the right to make changes to improve reliability, function or design. Honeywell does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

U.S. Patents 5,583,776; 5,952,825; 6,522,266; 6,529,114; 6,539,639; 6,543,146; 6,667,682; 6,813,582; 6,842,991; 6,877,237; 7,005,584 and 7,095,226 apply to the technology described. DRM and SmartPedometry are trademarks of Honeywell. Other patents pending.

Find out more

For more information on Honeywell's Magnetic Sensors visit us online at:
www.magneticsensors.com or contact us at 800-323-8295.

Ask us about Honeywell's additional precision sensor solutions:

- High Accuracy Precision Barometers
- Precision Pressure Transducers (Including ruggedized and explosion proof models)
- RF Microwave Attenuator and Switches
- High Temperature Electronics
- Thermal Switches and
- Accelerometers

Honeywell Microelectronics and Precision Sensors

12001 Highway 55
Plymouth, Minnesota 55441
Toll Free: 1-800-323-8295
www.honeywell.com

N61-0074-000-010
January 2015
© 2015 Honeywell International Inc.

