

ADSL Frequency Filter Inductors



- Excellent THD performance in a small footprint
- Used exclusively for frequency filtering
- SMT compact footprint
- Matched to various manufacturers' ADSL chipsets

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C


Part Number	Application	Turns Ratio (±2%)	Inductance (μH MAX ±7%)	DC Resistance (Ω MAX)	Isolation Voltage (Vrms)	Schematic
BX8153	CPE	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 5.0	(1-3) = (4-6) 0.7	500	1
BX2125A	CO	(1-3)/(2-5) 1:1	(1-6) = (2-5) = 50	(1-6) = (2-5) 2.0	500	2
BX2198	CPE	(2-3)/(4-5) 1:1	(2-3) = (4-5) = 74	(2-3) = (4-5) 5.0	500	3
BX2184	CPE	(1-5)/(2-5) 1:1	(1-5) = (2-4) = 91	(1-5) = (2-4) 3.5	500	4
BX8195	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 102.5	(1-6) = (2-5) 6.0	500	2
BX8254W	CPE	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 110	(1-3) = (4-6) = 2.5	500	1
BX8082	CPE	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 140	(1-6) = (2-5) = 6.0	500	2
B2126A	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 170	(1-6) = (2-5) = 6.5	500	2
B2208	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 170	(1-6) = (2-5) = 4.0	500	2
BX8253W	CPE	(1-3)/(4-6) 1:1	(1-6) = (2-5) = 500	(1-3) = (4-6) = 4.8	500	1
B2155	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 500	(1-6) = (2-5) = 6.0	500	2
BX8118	CO	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 282	(1-3) = (4-6) = 9.0	500	1
B2209	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 300	(1-6) = (2-5) = 7.0	500	2
B2127A	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 340	(1-6) = (2-5) = 7.5	500	2
B2210	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 455	(1-6) = (2-5) = 9.0	500	2
BX2128	CPE	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 500	(1-6) = (2-5) = 12.0	500	2
BX8115	CO	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 500	(1-3) = (4-6) = 9.0	500	1

Notes: Transformers are shipped in trays, unless Tape & Reel packaging is specified by adding the suffix "T" to this part number (i.e. BX8153T).

Mechanical

Schematic

BXXXX / BXXXXX

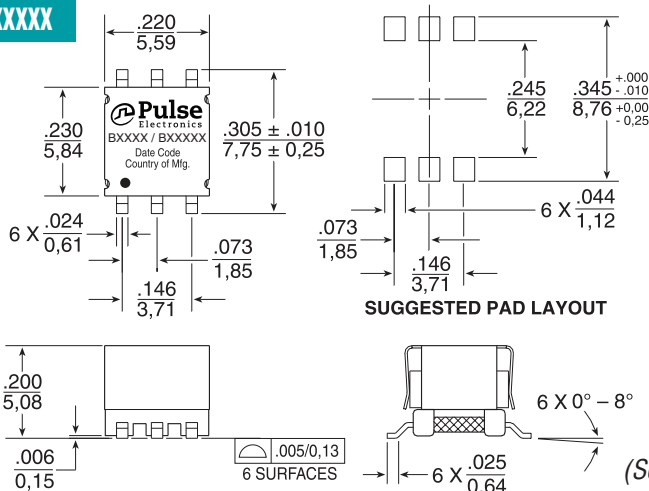


Weight0.38 grams

Tape & Reel1000/reel

Tray80/tray

Dimensions: Inches / mm

Unless otherwise specified, all tolerances are ± .010 / 0,25

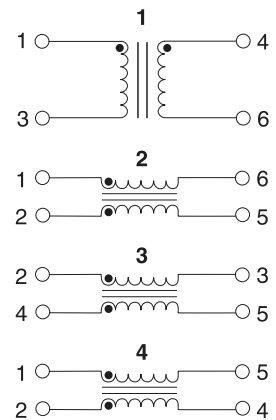

(See page two for ADSL Frequency Inductor Selection Guide)

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768

ADSL Frequency Filter Inductors

ADSL Frequency Inductor Selection Guide

IC Manufacturer & Part Number	Part Number	Inductance	Application
For General Use			
	B2184	91.0 μ H	CPE
	B2198	74.0 μ H	CPE
	BX2128	500.0 μ H	CPE
	BX8082	140.0 μ H	CPE
STMicroelectronics (Alcatel)			
MTB-20850/MTB-21250	BX8115	500.0 μ H	CO
	BX8118	282.0 μ H	CO
	BX8253W	185.0 μ H	CPE
	BX8254W	110.0 μ H	CPE
MTB-20150/MTB-20170	BX8153	5.0 μ H	CPE
NOTE: For other DynaMiTe Chipsets, see Datasheet B963 for alternative Inductor shapes and values.			
Centillum			
CT-L50SC04	B2208	170.0 μ H	CO
	B2209	300.0 μ H	CO
	B2210	455.0 μ H	CO
Globalspan Virata			
G7000 (DMT/CAP)	B2125A	50.0 μ H	CO
	B2126A	170.0 μ H	CO
	B2127A	340.0 μ H	CO
	B2155	205.0 μ H	CO
G7000 (DMT/CAP)	BX8195	102.5 μ H	CO

Legerity

NOTE: For Coupled Inductors matched to Legerity CO Line Drivers & Chipsets, See Datasheet **B804**

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.

Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.