

“High Frequency Ceramic Solutions”

1748 MHz Filtered Directional Coupler

P/N 1748CF15A075

Detail Specification Page 1 of 3


Revised 09/17/01

Part Number	Frequency (MHz)	Insertion Loss	Return Loss	Attenuation (min.)		Coupling	Isolation
				2 x Fo	3 x Fo		
1748CF15A075_	1710 - 1785	0.5 dB max	14 dB min.	22 dB	17 dB	20 ± 1.0 dB	25.0 dB min.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 Ω	-40 to +85°C	4000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/-0.008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

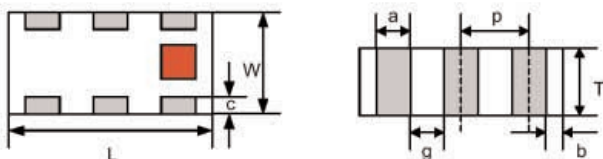


Terminal Configuration

1	IN	4	Termination
2	GND	5	GND
3	Main Out	6	Coupled Out



Mounting Considerations

Mount these devices with brown colored side facing up. Line width should be designed to provide 50Ω impedance matching characteristics.

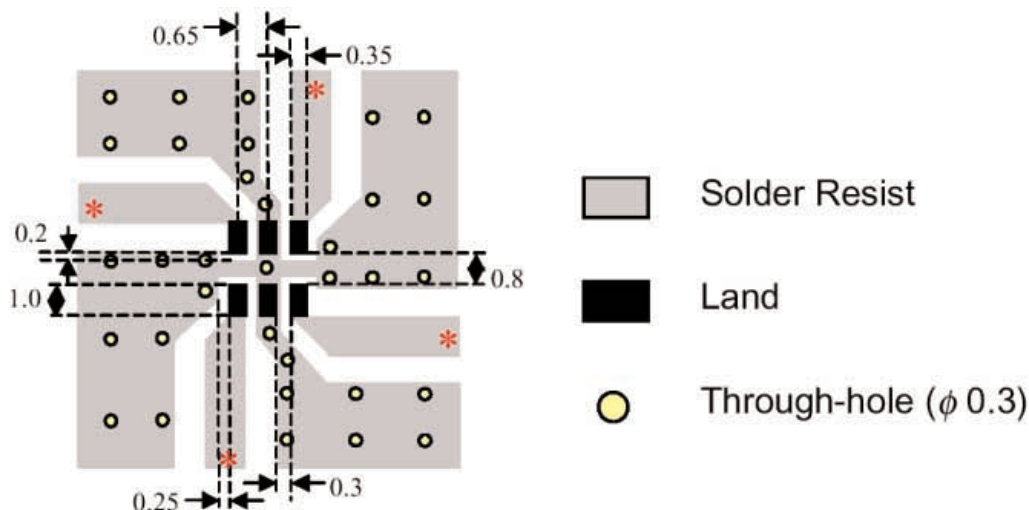

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.


“High Frequency Ceramic Solutions”

1748 MHz Filtered Directional Coupler


P/N 1748CF15A075

Detail Specification Page 2 of 3

P/N 1748CF15A075 Filtered Coupler
Typical Coupling & Isolation

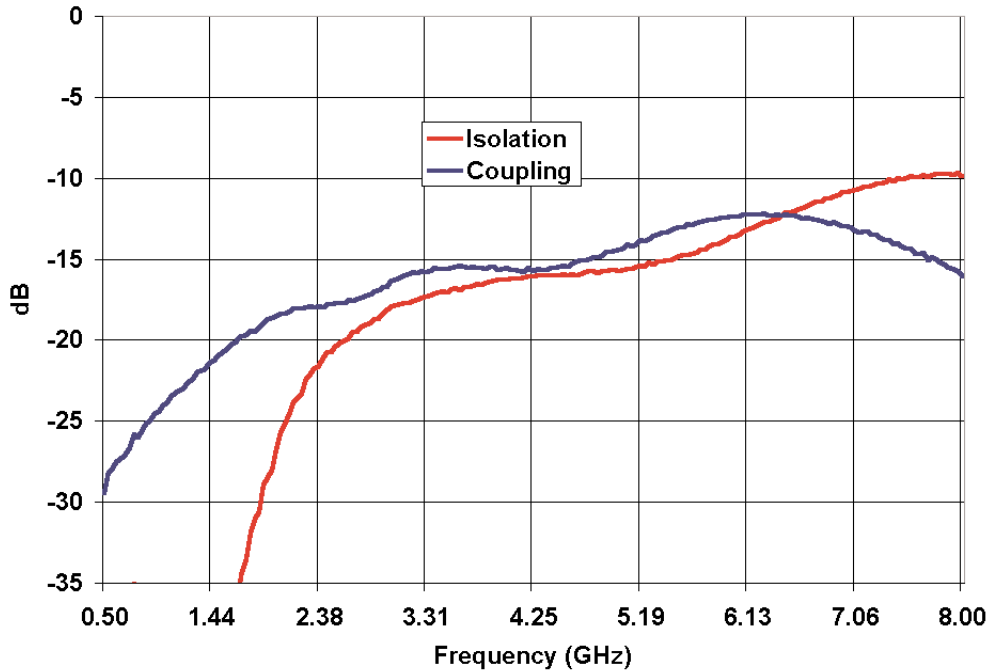

P/N 1748CF15A075 Filtered Coupler
Typical Return Loss

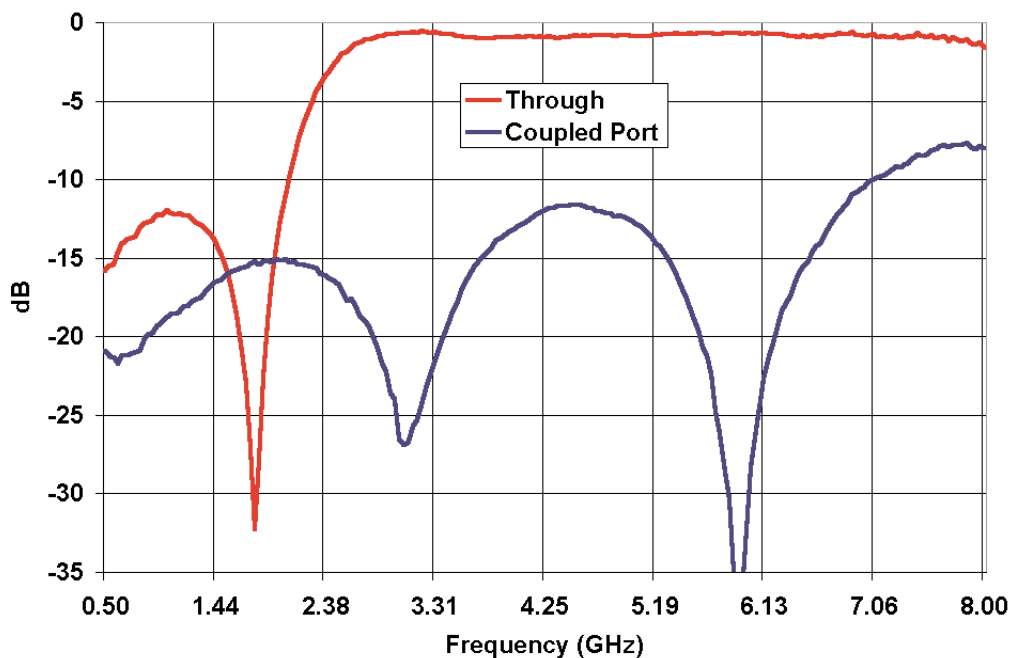

“High Frequency Ceramic Solutions”

1748 MHz Filtered Directional Coupler

P/N 1748CF15A075

Detail Specification Page 3 of 3

P/N 1748CF15A075 Filtered Coupler
Typical Insertion Loss (Dual Resolution)

