

GWS500

SPECIFICATIONS

PA590-01-01

MODEL		GWS500-5	GWS500-7.5	GWS500-12	GWS500-24	GWS500-36	GWS500-48	
1	Nominal Output Voltage	V	5	7.5	12	24	48	
2	Maximum Output Current	A	80	67.2	42	21	10.5	
3	Peak Output Current (*12)	A	-	-	-	25	16.7	
4	Maximum Output Power	W	400	504	504	504	504	
5	Peak Output Power (*12)	W	-	-	-	600	600	
6	Standby Input Power (*13)	W	0.5					-
7	Standby Output	-	5V @ 300mA					-
8	Efficiency (Typ) (230VAC) (*1)	%	84	87	89	90	90	
9	Input Voltage Range (*2)	V	85 ~ 264VAC (47-63Hz) or 125 ~ 373VDC (Withstand 300VAC Surge for 5 seconds)					-
10	Output Current (Typ) (115 / 230VAC) (*1)	A	4.5 / 2.3	5.5 / 2.7				-
11	Inrush Current (Typ) (*3)	A	20A/40A at 115VAC, 40A/40A at 230Vac, Ta= 25°C (First Inrush / Second Inrush)					-
12	PFHC	-	Designed To Meet IEC61000-3-2					-
13	Power Factor (Typ) (115/230VAC) (*1)	-	> 0.98 / 0.95					-
14	Output Voltage Range (By Trim Pot)	V	4.5~5.5	6.75~8.25	10.8~13.2	22~28.8	32~40	42~57.6
15	Output Voltage Range (By Programmable Voltage)	V	4.5~5.5	6.75~8.25	7.2~13.2	14.4~28.8	21.6~40	38.4~57.6
16	Ripple & Noise (*1,4)	mV	150	150	150	150	200	300
17	Line Regulation (*5,6)	mV	25	35	48	96	144	192
18	Load Regulation (*5,7)	mV	50	70	96	192	288	384
19	Temperature Coefficient	-	Less than 0.02% / °C					-
20	Over Current Protection (*8)	-	Hiccup		Constant Current Limit			-
21	Over Voltage Protection (*9)	V	5.75~6.75	8.6~10.1	13.8~16.2	30.3~35.5	41.4~48.6	60~69.6
22	Over Temperature Protection	-	Yes. Shutdown output and manual reset (CNT or Re-power on)					-
23	Hold-up Time (Typ) (*1)	ms	12		16			-
24	Leakage Current (Typ) (*10)	-	0.75mA At 230VAC					-
25	Remote Sensing	-	Yes					-
26	Remote ON/OFF control	-	Possible (Active Low)					-
27	Monitoring Signal	-	DCOK (Open Collector Output - Active Low)					-
28	Programmable Voltage	-	Possible					-
29	Series Operation	-	Possible					-
30	Operating Temperature *11,15)	-	-25°C ~ +70°C (Refer To Output Derating Curve). Guarantee Start Up At -40°C					-
31	Operating Humidity	-	30 to 90%RH (No Dewdrop)					-
32	Storage Temperature	-	-30°C ~ +85°C					-
33	Storage Humidity	-	10 to 95%RH (No Dewdrop)					-
34	Cooling	-	Forced Air By Blower Fans					-
35	Withstand Voltage	-	Input - Output : 4.25kVDC (20mA), Input - FG : 2.25kVDC (20mA) Output - FG : 500VDC (100mA) For 1min.					-
36	Isolation Resistance	-	Input - FG, Input - Output And Output - FG: More Than 100MΩ (500VDC) At 25°C And 70%RH					-
37	Vibration	-	At No Operating, 10 - 55Hz (Sweep For 1min) 19.6m/s ² Constant, X, Y, Z 1 Hour Each.					-
38	Shock (In package)	-	Less Than 196.1m/s ²					-
39	Safety	-	Approved by UL60950-1, CSA C22.2 No.60950-1-07 (2nd Edition) EN60950-1, IEC60950-1 (2nd Edition), CE					-
40	EMI	-	Built To Meet EN55022-B, CISPR22-B					-
41	Immunity	-	Built To Meet EN61000-4-2 (Level 2,3), -3 (Level 3), -4 (Level 3), -5 (Level 3), -6 (Level 3), -8 (Level 4), -11					-
42	Weight (Typ.)	g	1020					-
43	Size (L x W x H)	mm	218 x 105 x 41 (Refer To Outline Drawing)					-

* Read instruction manual carefully , before using the power supply unit.

=NOTES=

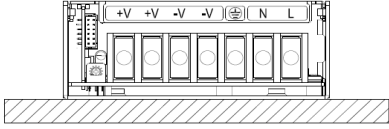
- *1. At maximum output power, nominal input voltage, Ta = 25°C.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC, 50 / 60Hz on name plate.
- *3. Not applicable for the in-rush current to Noise Filter for less than 0.2mS.
- *4. Ripple & noise are measured at 20MHz by using a 300mm twisted pair of load wires terminated with a 0.1µF Film Capacitor and a 47µF Electrolytic Capacitor.
- *5. Measure line & load regulation at output terminal.
- *6. 85 - 264VAC, constant load.
- *7. No load - Full load, constant input voltage.
- *8. Current limit with automatic recovery. Avoid to operate at overload or dead short for more than 30 seconds.
- *9. OVP circuit will shutdown output, manual reset (CNT reset or re-power on).
- *10. Measured by each measuring method of UL and EN (at 60Hz), Ta = 25°C.
- *11. Refer to Output Derating Curve (PA590-01-02_) for details of output derating versus ambient temperature.
- *12. Operating period at peak output current is less than 10sec., duty ≤0.35
- *13. Standby input power refers to the power consumption during remote off and 5V is at no load condition
- *14. All parameters NOT specifically mentioned are measured at 230VAC input, rated load and Ta = 25°C.
- *15. For cases where conformance to various safety specs (UL, CSA, EN), operating temperature is -25 ~ +50°C.

GWS500

PA590-01-02

DERATING CURVE :

***COOLING : FORCED AIR COOLING**

Ta (°C)	LOAD (%)	STANDARD MOUNTING
-25 ~ +50	100	
70	50	

