



UNIT:mm

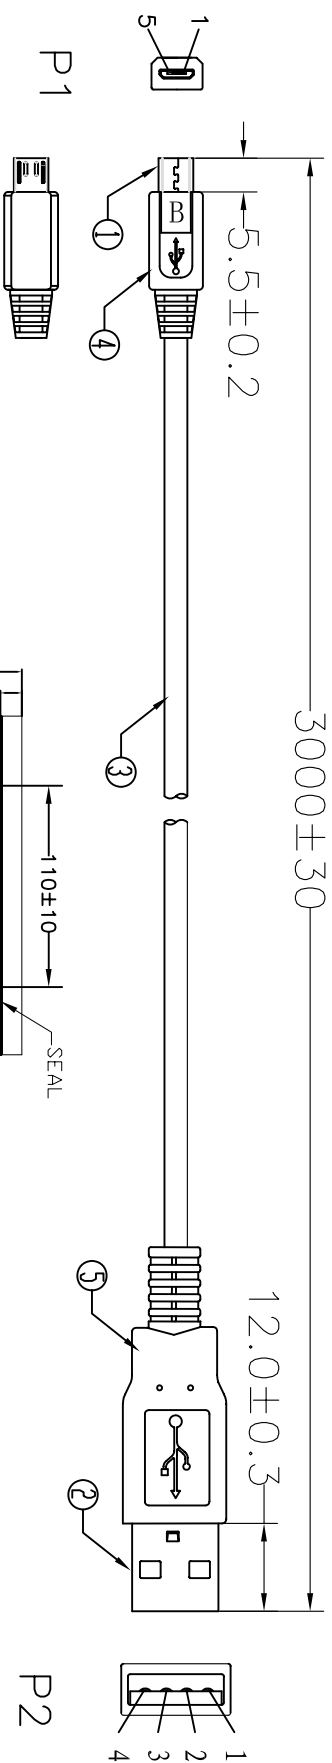

**PIN ASSIGNMENT**

P1	RED	P2	1
1	WHITE	1	2
2	GREEN	2	3
3	BLACK	3	4
4	DRAIN+BRAID	4	SHELL
5		5	SHELL

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

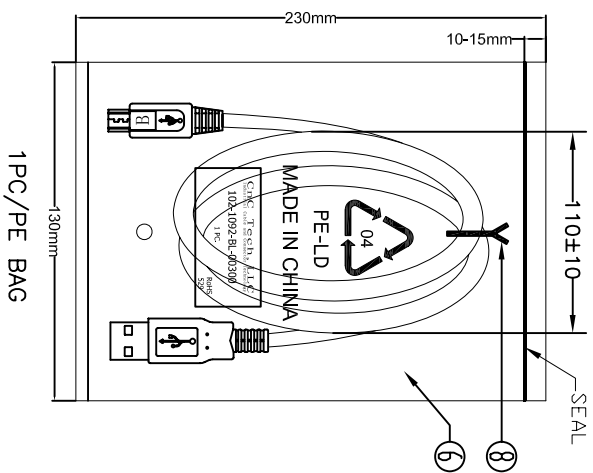

⑧	TIE	1	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及印生产周期,有透气孔.
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"及印生产周期,有透气孔.
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO. WM-40)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO. WM-116)
③	CABLE	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=3000±10mm
②	CONN	1set	USB A MALE SHELL:NICKEL PIN:G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1	MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

<p><b>CNC Tech, LLC</b>                  Industrial Cable and Connector Technology</p>		VERSIONS/EDITION	A/0	PROJECTION	
		DECIDED		DATE	2012-02-17
DRAWN	ZHONGHS	DRAWING NO			
CHECKED		CUSTOMER			
APPROVAL		ITEM NO.	102-1092-BL-00300		

4

3

2

1

A

B

C

D

A

B

C

D