


HC-B 24-TMQ-76/O1M25S

Order No.: 1604859

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604859>

HEAVYCON sleeve housing B24, with double locking latch, height 76 mm, with support 1x M25, lateral conductor exit

| Commercial data | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 881726 |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 500 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
06/30/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

| | |
|--------|---|
| Note | For contact inserts HC-B24, BB46, D64, DD108, M |
| Design | B24 |
| Height | 76 mm |
| Width | 43 mm |

| | |
|---------------------------------|---------------------------------|
| Length | 120 mm |
| Housing type | Sleeve housings |
| Locking type | With double locking latch |
| Cable exit | Lateral |
| Type of the screw connection | 1x M25 |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Material lock | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

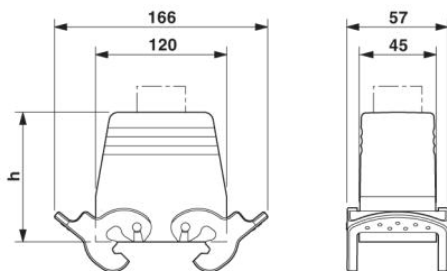

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;