


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			DS	EL	
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00	D		REV ECO-08-012703	11JUL12	JB	JG

- 1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2. MATERIAL: HOUSING- POLYCARBONATE, BLUE  
 TERMINAL- PHOSPHOR BRONZE, PLATED WITH 1.27µm [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA OVER 2.54µm [.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 3. PLUG WILL ACCEPT 26 OR 28 AWG SOLID WIRE, 0.74-0.86 [.029-.034] DIAMETER, WITH AN OVAL CABLE JACKET OF 2.29 X 4.83 [.090 X .190] MAXIMUM.
- 4. TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- 5. 1000 ASSEMBLIES PER PACKAGE.
- 6. 100 ASSEMBLIES PER PACKAGE.

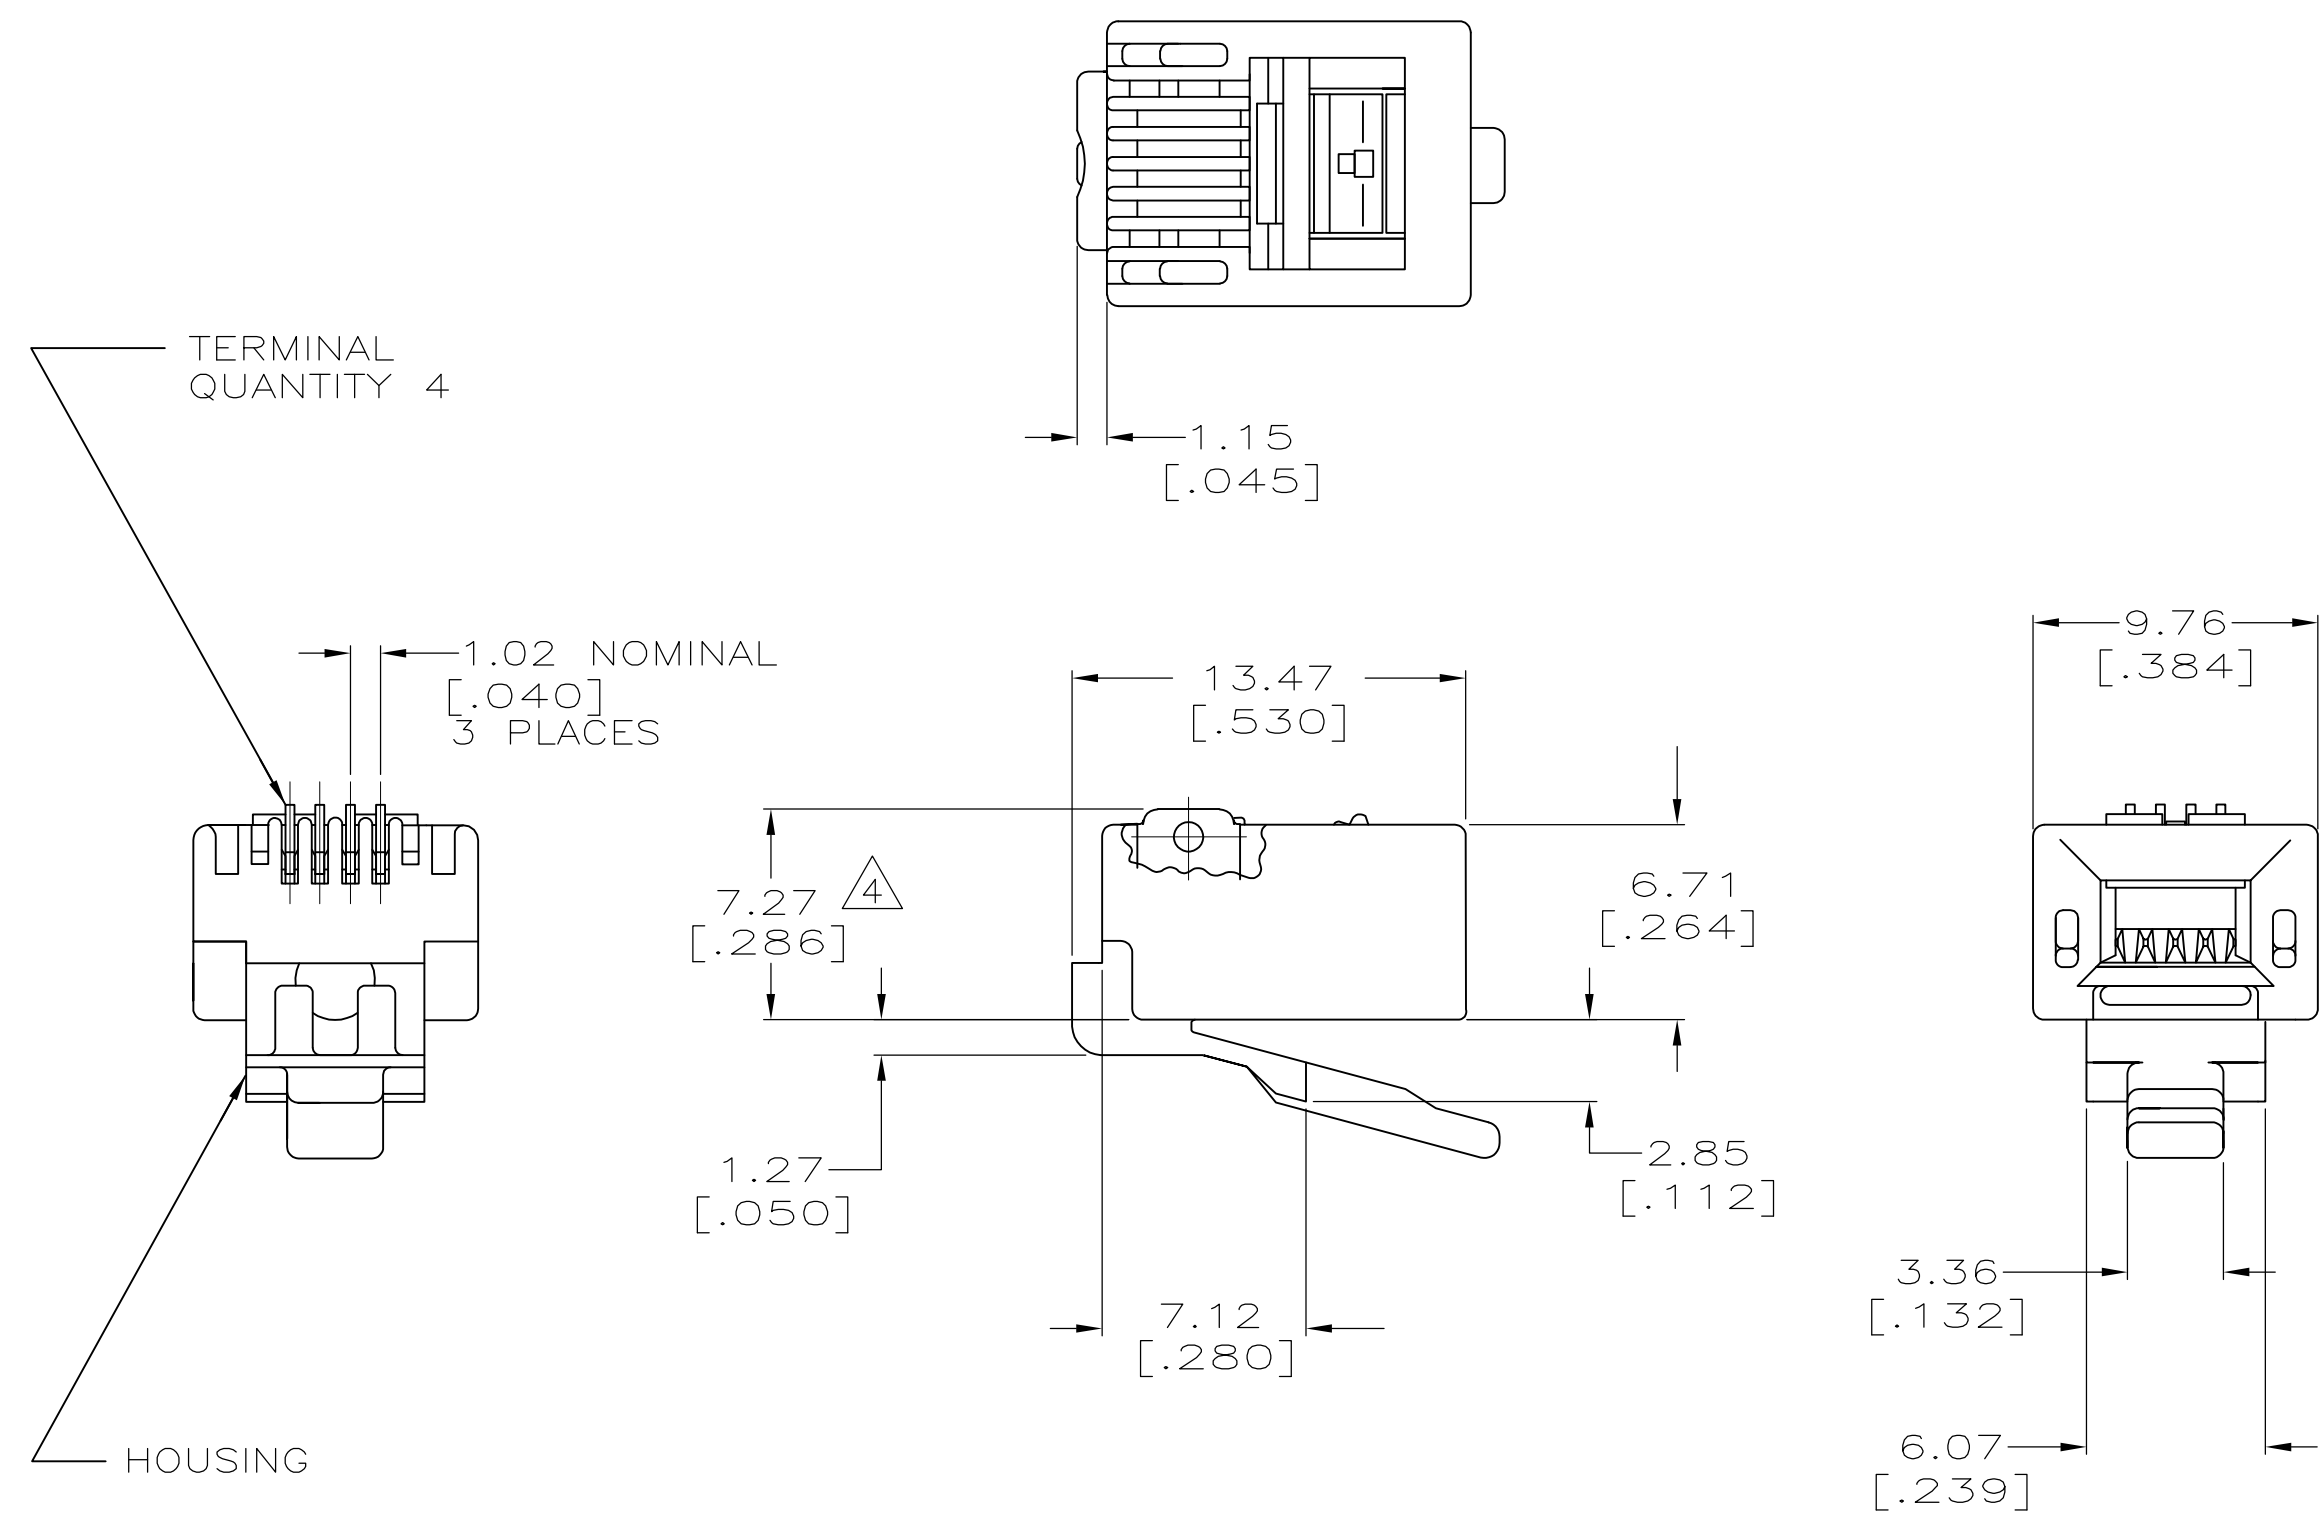

6	5-557965-3
5	5-557965-2
PACKAGE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L. HALL	03MAR2008		TE Connectivity		
DIMENSIONS: MM [INCHES]		CHK	B. MCNEILL	04MAR2008		NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	B. MCNEILL	04MAR2008		PRODUCT SPEC		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC		108-1163				
MATERIAL		WEIGHT		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		CUSTOMER DRAWING		A2		00779	C=557965	-
				SCALE		SHEET		REV
				4:1		1 of 1		D