

**Part Number:** [15166-0226](#)  
**Status:** **Active**  
**Overview:** Premo-Flex™ FFC and Etched Polyimide Jumpers  
**Description:** 0.50mm Pitch Premo-Flex™ FFC Jumper, Opposite Side Contacts (Type D), 20 Circuits, 0.305m Cable Length, Cable Thickness 0.12mm, Tin (Sn) Plating

**Documents:**

[Drawing \(PDF\)](#) [Packaging Specification PK-15166-001 \(PDF\)](#)  
[Product Specification PS-15166-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Cable
Series	<a href="#">15166</a>
Comments	Contacts on opposite sides, Type D
Crimp Quality Equipment	Yes
Overview	<u>Premo-Flex™ FFC and Etched Polyimide Jumpers</u>
Product Name	Premo-Flex™ FFC Jumper
UPC	884982832145

**Physical**

Cable Length	0.305m
Circuits (Loaded)	20
Circuits (maximum)	20
Net Weight	1.000/g
Packaging Type	Bag
Pitch - Termination Interface	0.50mm
Temperature Range - Operating	-40°C to +105°C
Wire Size AWG	N/A
Wire/Cable Type	Flat Flex Cable


**Electrical**

Current - Maximum per Contact	0.5A
Voltage - Maximum	60V AC

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-15166-001
Product Specification	PS-15166-001
Sales Drawing	SD-15166-001

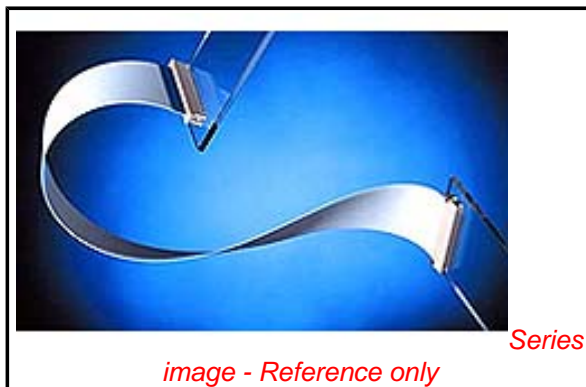

**EU RoHS**

**ELV and RoHS  
Compliant**

**REACH SVHC  
Not Reviewed  
Low-Halogen Status  
Not Reviewed**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

15166Series

**Use With**

[www.molex.com/product/ffcfcpc\\_th.html](http://www.molex.com/product/ffcfcpc_th.html)