


- NOTE:
1. TEST:DC 300V/1s
  2. INSULATION RESISTANCE:10m ohm
  3. CONTACT RESISTANCE::2 ohm
  4. PRODUCTS MEASURE UP TO THE ROHS
  5. PVC TEGUMENT

|    |  |       |
|----|--|-------|
| 10 | PE BAG 6**9**0.04MM  | 1PCS  |
| 9  | ELLIPTICAL CABLE TIE WITH CORE L=70MM  | 1PCS  |
| 8  | TIN WIRE LEAD-FREE Ø0.6 ROHS   | 0.45g |
| 7  | P1&P2 PVC , BLACK 45P  | 16g   |
| 6  | CONDUCTIVE COPPER PLATINUM P1.W:25MM*L:45MM1PCS ; P2.W:20MM*L:35MM1PCS   | 2PCS  |
| 5  | GUMMED PAPER P1.W:20*L:50MM; P2.W:15*L:35MM  | 2PCS  |
| 4  | PE1&P2 TRANSPARENT PE INTERNAL MODEL MATERIALS,LOW DENSITY   | 6g    |
| 3  | HDMI C TYPE MALE: SHORT BODY PIN G/F,IRON SHELL-PLATED NICKEL,INSULATION BLACK   | 1PCS  |
| 2  | HDMI A TYPE MALE: SHORT BODY PIN G/F,IRON SHELL-PLATED NICKEL,INSULATION BLACK   | 1PCS  |
| 1  | UJ.20276[30AWG(7/0.10TS)*1P+EA+AL/MY]*4+30AWG(7/0.10TS)*1P+30AWG(7/0.10TS)*5C+AE(16/6/0.12AM) OD:6.0mm PVC BLACK TEGUMENT CUT L=990±10mm(LS) | 1PCS  |
| No | DESCRIPTION  | QTY   |

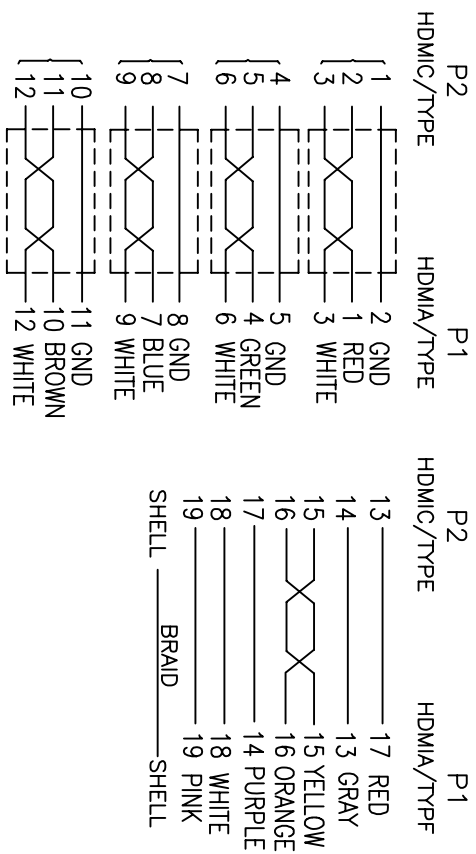

Cnc Tech, LLC

-TOLERANCES-  
UNLESS OTHERWISE SPECIFIED  
公差參考表



TITLE: HDMI AM TO CM CABLE PVC

APPD: APPD: PRODUCT NO: 742-10010-00500

CHECK: CHECK: DATE SCALE UNIT TYPE PAGE  
X.XX ±0.25 X.XX ±2.00 2013.08.20 1:1 mm Z 1 / 1  
X.XXX ±0.10 X.XXX ±1.00 DRAW: 2013.08.20