



EP10 LM259X Inductor  
150 uHy

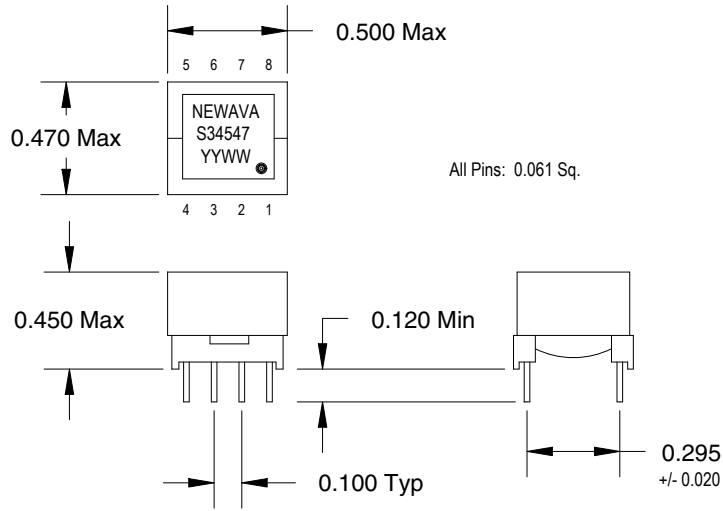

All Pins: 0.061 Sq.

ELECTRICAL SPECS:

- 1: INDUCTANCE: @ 10 kHz, 0.1 Vrms  
(1 thru 4 to 5 thru 8) = 150 - 195 uHy
- 2: DCRs:  
(1 thru 4 to 5 thru 8) = 0.180 Ohms Max.
- 3: SRF: 950 kHz Min
- 4: HIPOT: 500 VDC  
Winding to core (2 Sec., 5 mA Max)



All pins may not be used.  
Specifications at room temperature of 25 C.

A	2/28/03		KAM	Production Release	
REV.	DATE	ECN	BY	DESCRIPTION	
TOLERANCES ON			Newava Tech. Watertown, SD 57201 605-886-0264		150 uHy Inductor
.XXX	.XX	ANGLE			
+ -	+ -	+ -	DATE		
DRAWN:		SCALE	MODEL	DRAWING NO.	REV.
CHECKED: -				S34547	A
APPROVED: -		- KAM			
THIS PRINT MUST NOT BE COPIED IN WHOLE OR IN PART				OR USED DETRIMENTALLY TO OUR INTEREST	
					SHEET 1 OF 1