


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	"L" LENGTH +/- .3" [ 7 ]
MLT4SH-LP	4" [ 102 ]	50	17.1" [ 434 ]
MLT6SH-LP	6" [ 152 ]	50	23.4" [ 594 ]
MLT8SH-LP	8" [ 203 ]	50	29.7" [ 754 ]
MLT10SH-LP	10" [ 254 ]	50	35.9" [ 912 ]
MLT12SH-Q	12" [ 305 ]	25	42.2" [ 1072 ]

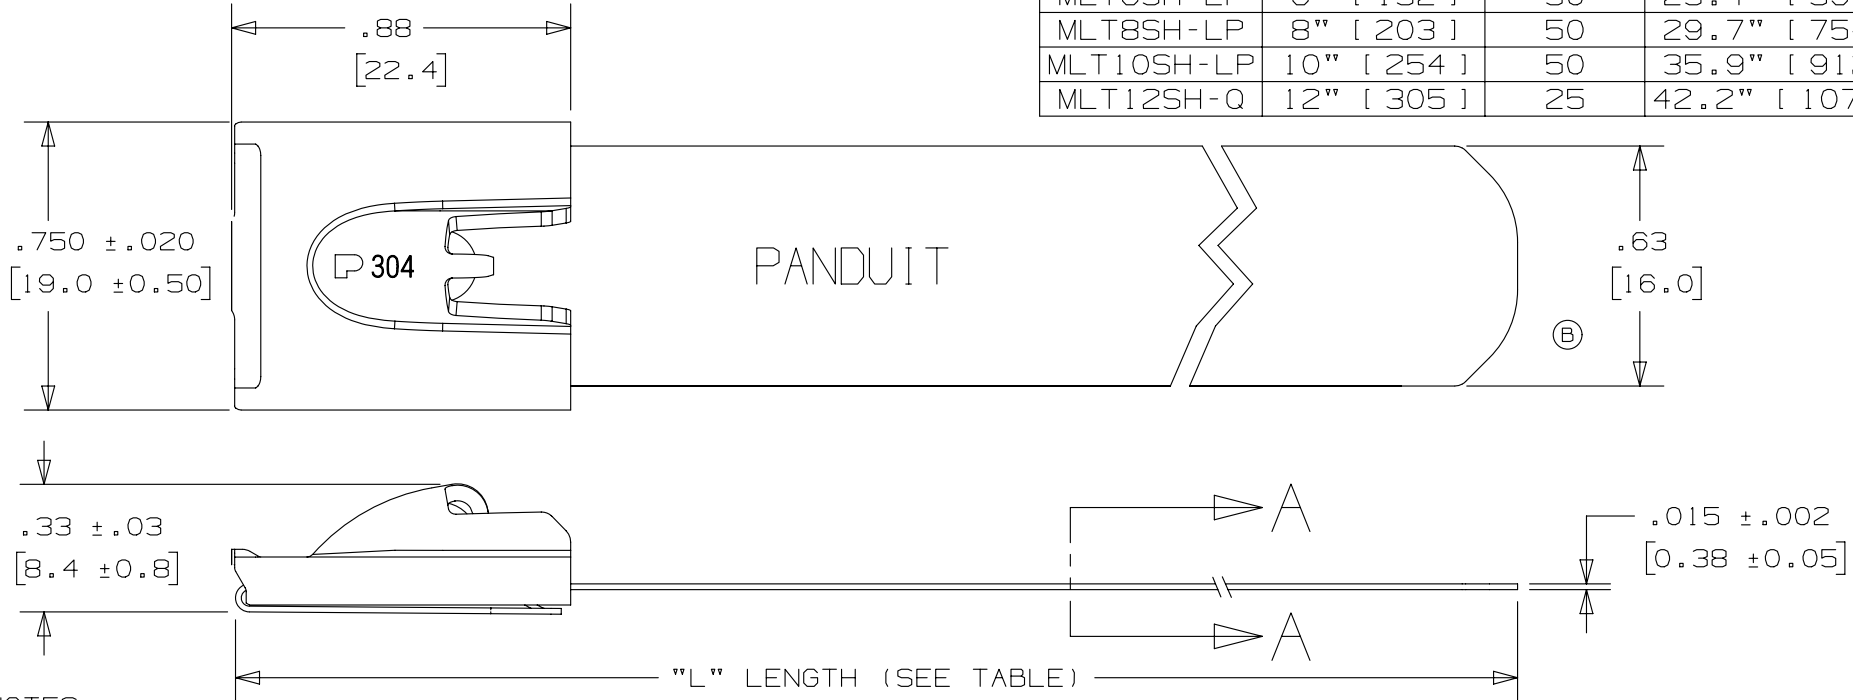

NOTES:

1. APPLICATION TOOLS - RTIHT
2. MINIMUM LOOP TENSILE STRENGTH - 900 LBS. (4005 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [ ] DENOTES DIMENSION IN MILLIMETERS AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES: .XXX = ±.010 [ .25 ]  
.XX = ±.02 [ .5 ]  
.X = ±.03 [ .8 ]  
ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

SECTION A-A  
SCALE: 4x  
BROKEN EDGES TO ELIMINATE SHARPNESS

TITLE		CUSTOMER DRAWING	
METAL LOCKING TIE - SUPER HEAVY DUTY		ITEM REVISION NAME	N41163BS/04
		DATASET FILE NAME	N41163BS/04A
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		MATERIAL:	304 STAINLESS STEEL
.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ]		DRAWING NUMBER:	N41163BS_DC
.xx ± .01 [ .25 ]      ANGLES ± 5 °			
THIRD ANGLE PROJECTION			
DRAWN BY	DATE	CHK	SCALE
JAMB	1/04	DPN	2:1
SHT 1 OF 1		SIZE	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	4/13	JAMB	MIM	RGRO	UPDATED DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01047
03A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING FOR REFERENCE ONLY. ORIG CAD FILE SPEC WAS S41163_02	-----
02	6/05	JAMB	EJD	---	ⓑ ADDED NEW TIP CONFIGURATION	SS00011
01	8/04	JAMB	DPN	JJB	Ⓐ REMOVED "AISI NO.5"	11907
00	1/04	JAMB	DPN	JJB	DRAWING RELEASED	11307