
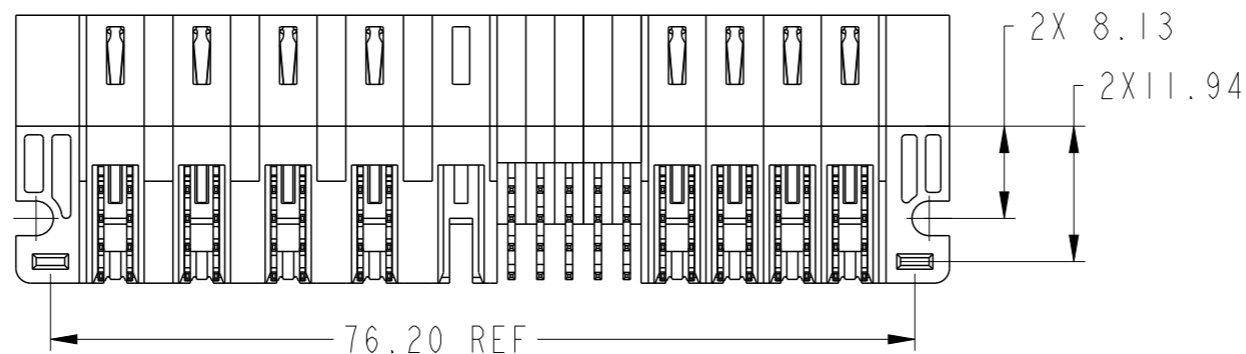
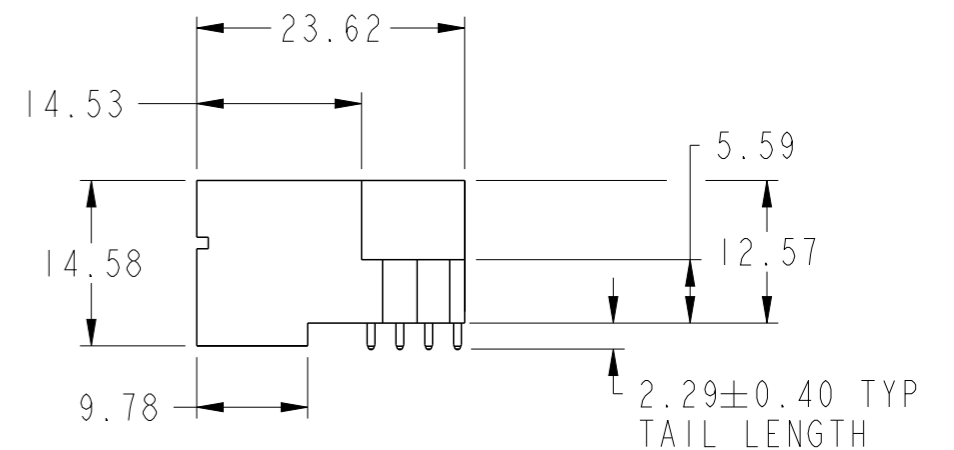
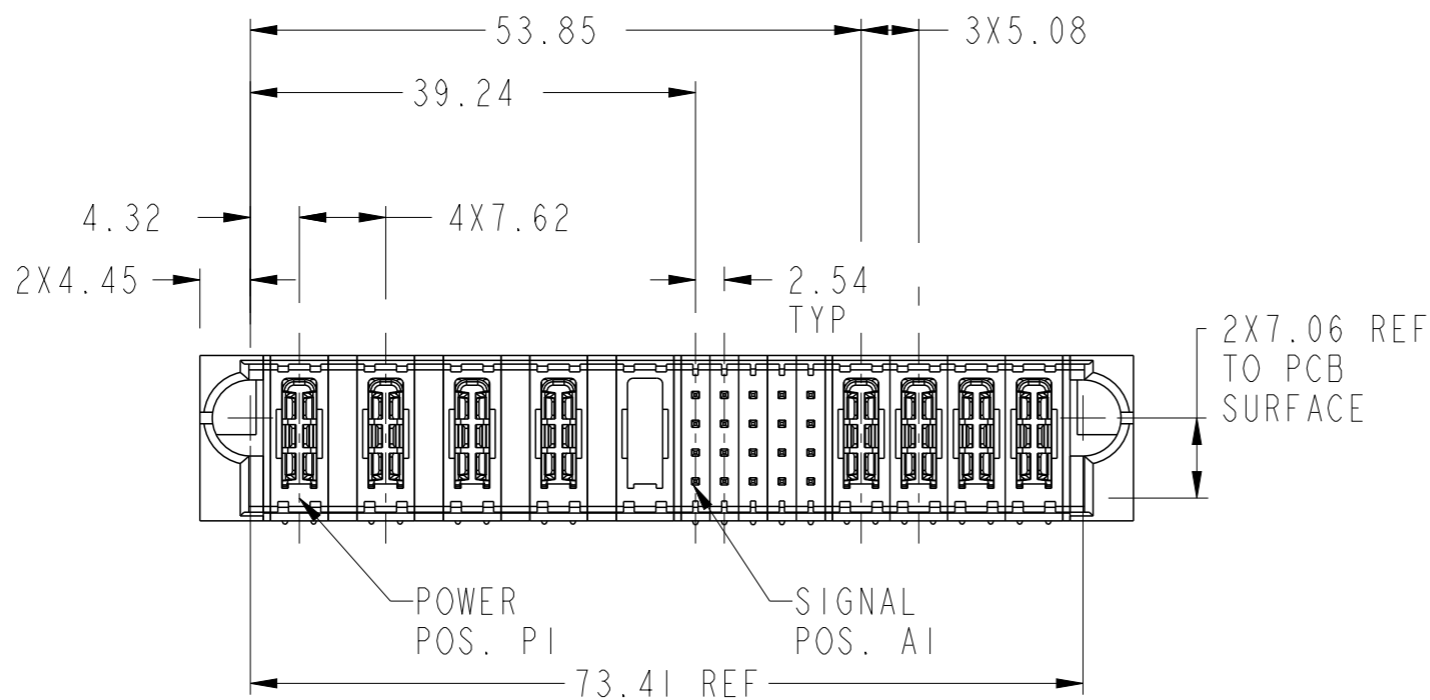



PRODUCT NUMBER SEE SHEET 2

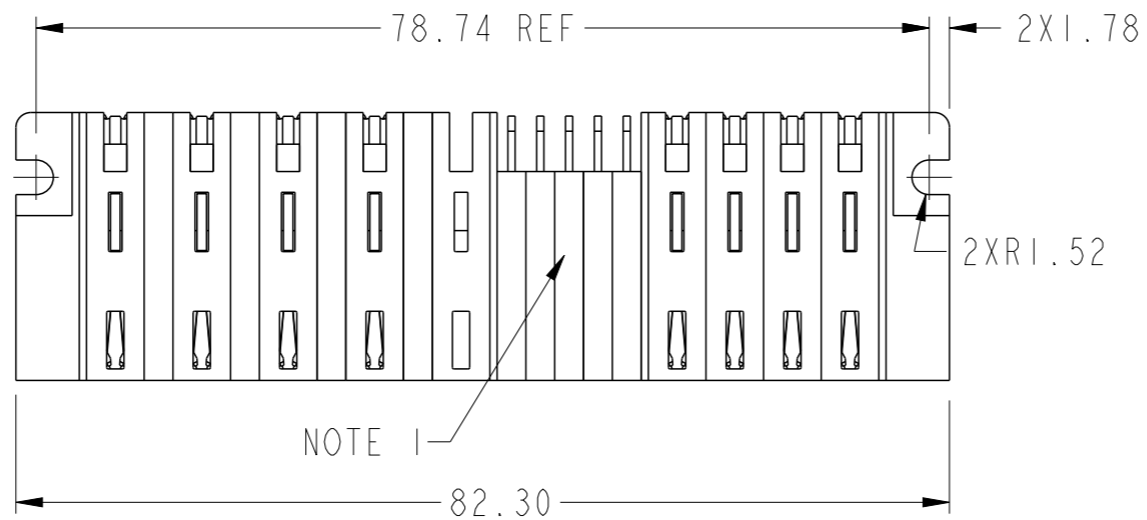

spec ref	*	dr	Xie Bob	2013/05/22	projection	MM	size	A3	scale	3:2													
tolerance std	ASME Y14.5	eng	Xie Bob	2013/06/20			ecn no	-	rel level														
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Li-He	2013/06/19			product family	PwrBlade+	Released														
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.5		0.XX	±0.25		0.XXX	±0.10	angular	0°	±2°	appr	Pei-Ming Zheng	2013/06/20	product name	5ACP+20S+4HDP		dwg no	10106262-9005001	rev	A
linear	0.X	±0.5																					
	0.XX	±0.25																					
	0.XXX	±0.10																					
angular	0°	±2°																					
www.fci.com		cat. no.		Product - Customer Drw			sheet 1 of 3																

Copyright FCI. FCI

PRODUCT NO.	ROWS	HIGH POWER					SIGNAL					HIGH POWER				E2
		E1	P1	P2	P3	P4	P5	1	2	3	4	5	P6	P7	P8	
10106262-9005001LF	DCBA	H3	H3	H3	H3	X	V	V	V	V	V	H3	H3	H3	H3	
							Q	Q	Q	Q						
							P	P	P	P						
							N	N	N	N						

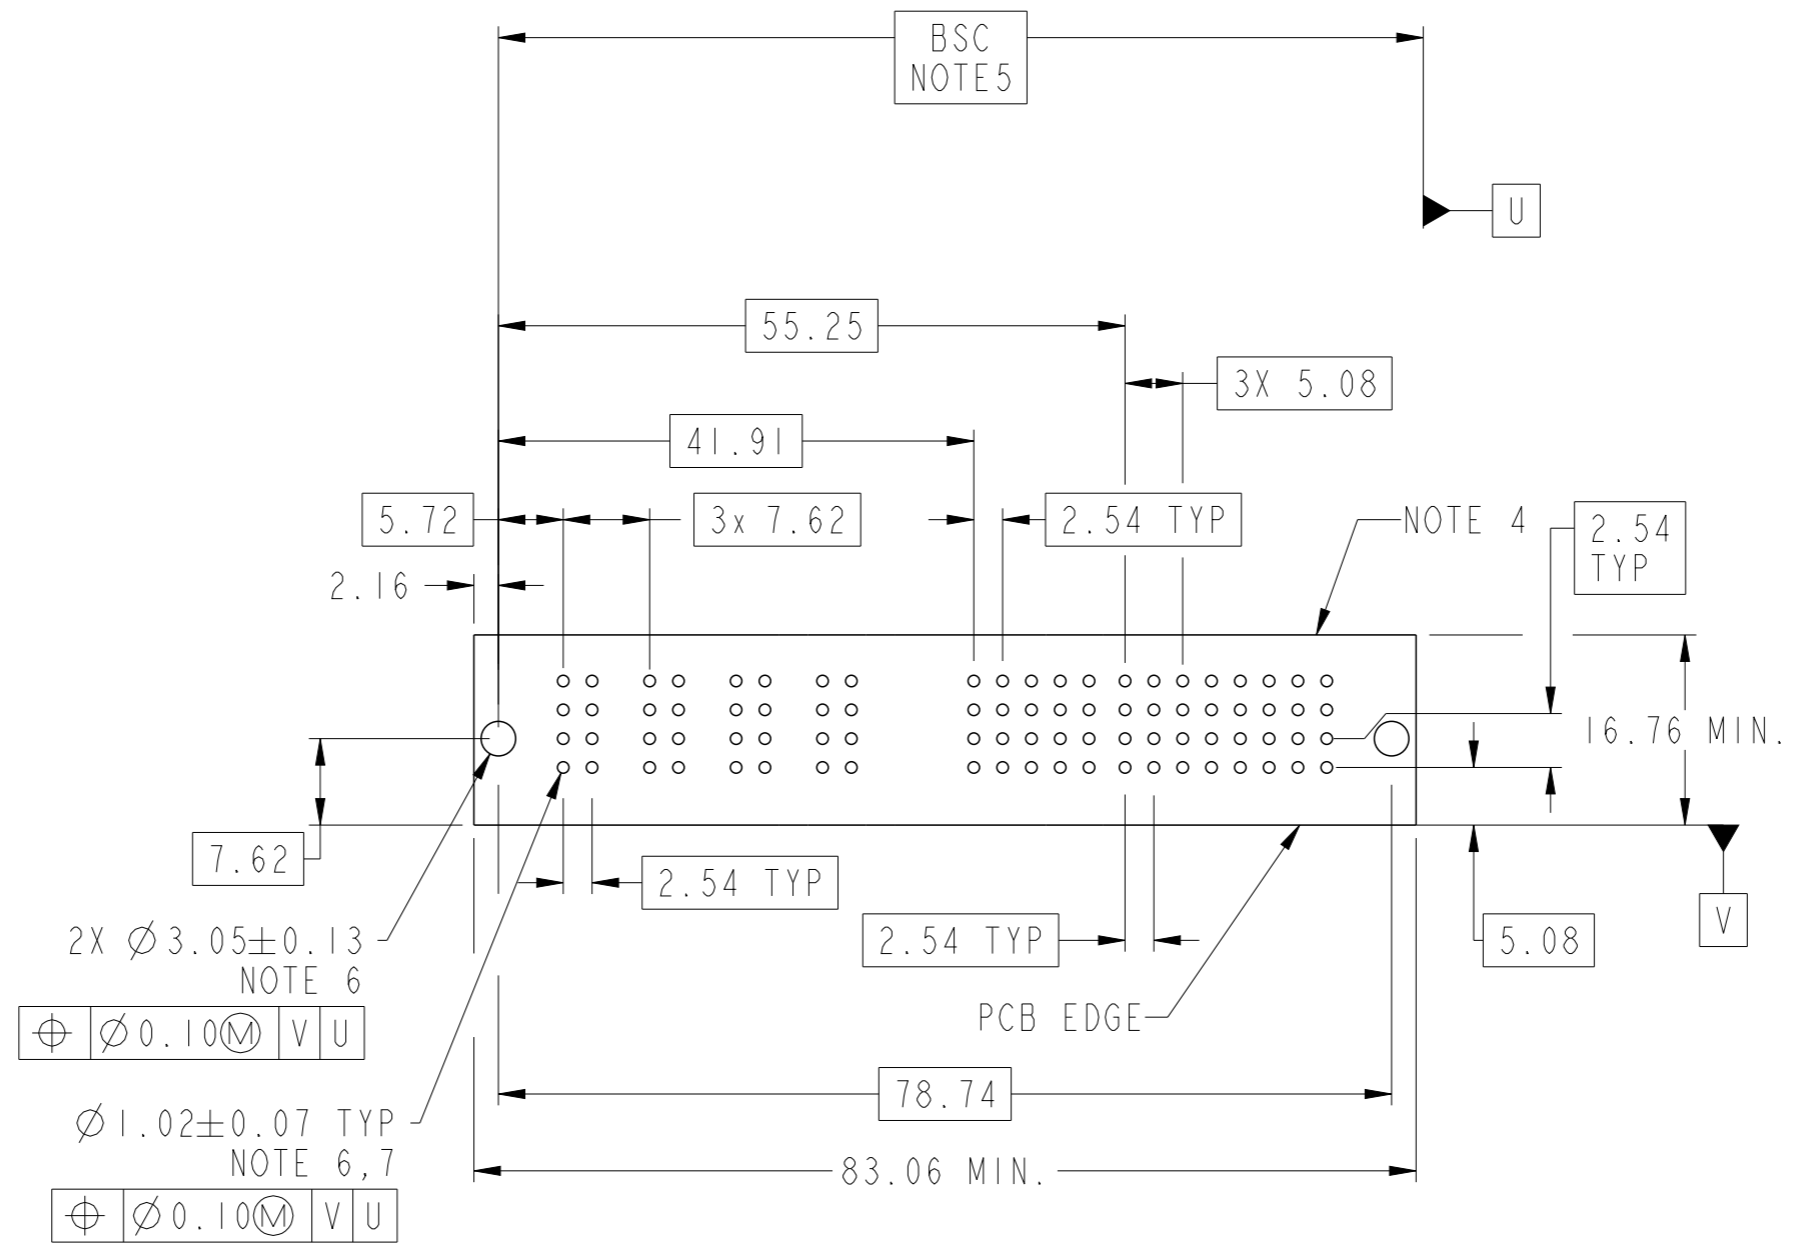

$2 \times \varnothing 3.05 \pm 0.13$	NOTE 6
$\varnothing 0.10$	V U
$\varnothing 1.02 \pm 0.07$ TYP	NOTE 6, 7
$\varnothing 0.10$	V U

CODE	DESCRIPTION
H3	STD HIGH POWER CONTACT (2.29)
N	STD SIGNAL CONTACT, ROW A (2.34)
P	STD SIGNAL CONTACT, ROW B (2.34)
Q	STD SIGNAL CONTACT, ROW C (2.34)
V	STD SIGNAL CONTACT, ROW D (2.34)
X	OMITTED

dr	Xie Bob	2013/05/22	projection	MM	size	A3	scale	3:2
eng	Xie Bob	2013/06/20			ecn no			
chr	Li-He	2013/06/19			-			
appr	Pei-Ming Zheng	2013/06/20	product family	PwrBlade+	rel level		Released	
			5ACP+20S+4HDP		dwg no	10106262-9005001		rev
www.fci.com			RA STB HEADER				A	
cat. no.			Product - Customer Drw			sheet 2 of 3		




Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

dr	Xie Bob	2013/05/22	projection 	MM 	size	A3	scale	3:2
eng	Xie Bob	2013/06/20			ecn no	-		
chr	Li-He	2013/06/19			rel level	Released		
appr	Pei-Ming Zheng	2013/06/20	product family	PwrBlade+				
		title 5ACP+20S+4HDP RA STB HEADER		dwg no 10106262-9005001	rev A			
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3			