


# HC-B 16-KMQ-80/O1STM25

Order No.: 1646887



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1646887>

HEAVYCON B16 coupling housing, with double locking latch, height: 80 mm, with 1 x M25 thread, straight cable outlet, with seal

Commercial data	
GTIN (EAN)	
Note	Made-to-order
sales group	D002
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 491 (PC-2009)

### Product notes

WEEE/RoHS-compliant since: 03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


## Technical data

General data	
Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Height	80 mm
Width	43 mm
Length	94 mm

Housing type	Coupling housings
Locking type	With double locking latch
No. of cable exits	1
Cable exit	Straight
Type of the screw connection	M25
Pg screw connection	None
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF

### Diagrams/Drawings

#### Dimensioned drawing

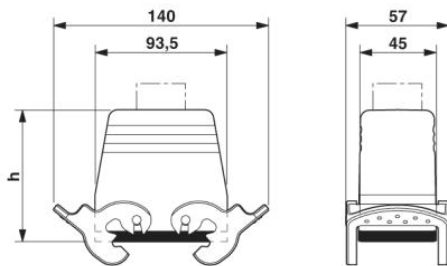

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;