
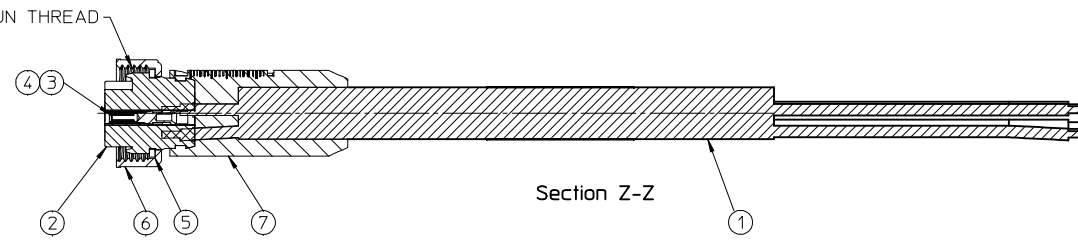

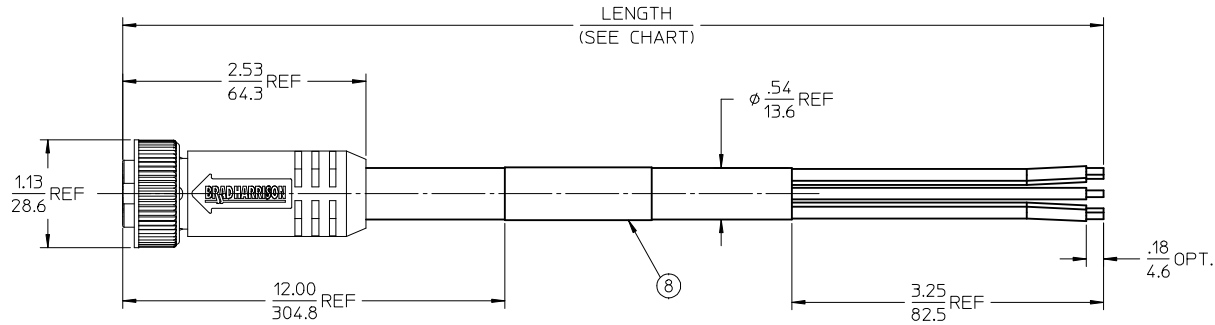


PART NUMBER	ENGINEERING NO.	LENGTH
1300070071	207000A01F030	3' 0" +1.75 - 0 [.9M +44.5 - 0]
1300070073	207000A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]
1300070076	207000A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]
1300070080	207000A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]

(A1)

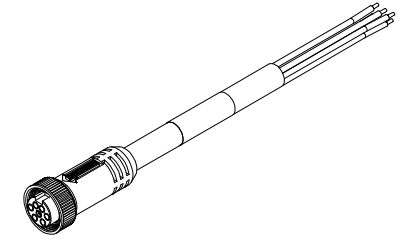

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
5. MATES WITH: MINI CHANGE, B-SIZE 7 POLE RECEPTACLE
6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 8 AMPS
7. ASSEMBLY IS RoHS COMPLIANT

S1	Color
1	WHITE/BLACK
2	BLACK
3	WHITE
4	RED
5	ORANGE
6	BLUE
7	GREEN/YELLOW

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	OVERMOLD	PVC	YELLOW
6	1	COUPLING NUT	ZIN DIE CAST	BLACK
5	1	FRICION RING	NYON	NATURAL
4	7	SOCKET CONTACT	BRASS	GOLD PLATED
3	7	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 7 POLE	PVC	YELLOW
1	1	CABLE, 16-7 ST00W/ST	PVC JACKET	YELLOW

RELEASED EC NO: MNA2009-0867 DRAWN: BRUPERT 2009/06/25 CHKD: BRUPERT APPR: J. MURPHY 2009/07/08	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± .01 1 PLACE ± 0.3 ± ---	mm INCH ± --- ± --- ± --- ± .01 ± --- ± ---	DRAWN BY BRUPERT	DATE 2009/04/02	CHECKED BY B. WOODMAN	DATE 2009/04/03	TITLE MINI-CHANGE CORD ASSY FEMALE, B-SIZE 7 POLE		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		APPROVED BY J. MURPHY		DATE 2008/04/06		MOLEX INCORPORATED DOCUMENT NO. SD-130007-005		SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										