



form A3

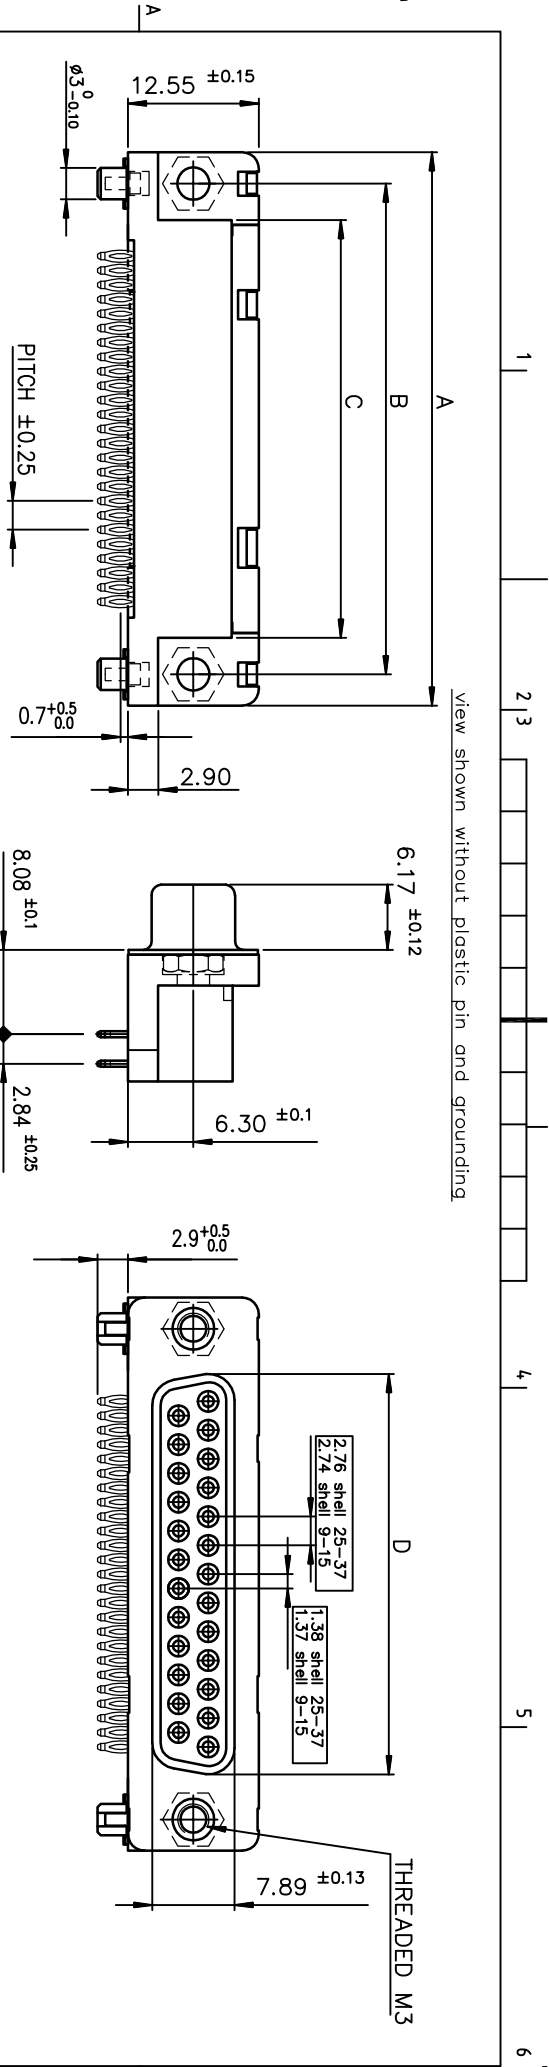

View shown without plastic pin and grounding

PC cord drilling dimensions(after plating)  
(thickness 1.60 ±0.25 mm)

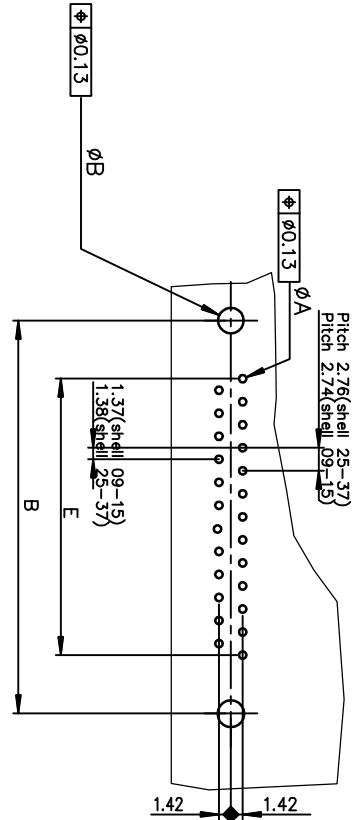


SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD PART NUMBER	TIN LEAD PART NUMBER	LEAD FREE PART NUMBER	LEAD FREE PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4G1.00	D09S80C6G1.00	D09S80C4G1.00LF	D09S80C6G1.00LF
15	39.14	33.32	26.32	24.54	19.18	D15S80C4G1.00	D15S80C6G1.00	D15S80C4G1.00LF	D15S80C6G1.00LF
25	53.03	47.04	40.04	38.25	33.12	D25S80C4G1.00	D25S80C6G1.00	D25S80C4G1.00LF	D25S80C6G1.00LF
37	69.32	63.50	56.50	54.71	49.68	D37S80C4G1.00	D37S80C6G1.00	D37S80C4G1.00LF	D37S80C6G1.00LF

TIN LEAD PART NUMBER	TIN LEAD PART NUMBER	LEAD FREE PART NUMBER	LEAD FREE PART NUMBER
D09S80C4G1.00	D09S80C6G1.00	D09S80C4G1.00LF	D09S80C6G1.00LF
D15S80C4G1.00	D15S80C6G1.00	D15S80C4G1.00LF	D15S80C6G1.00LF
D25S80C4G1.00	D25S80C6G1.00	D25S80C4G1.00LF	D25S80C6G1.00LF
D37S80C4G1.00	D37S80C6G1.00	D37S80C4G1.00LF	D37S80C6G1.00LF

Gold flush 0.76 > gold Gold flush 0.76 > gold

Detail of grounding strip



GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0001

mat'l. code		surface		tolerance		projection		product family	
lfr	ecn no	dr	date	ISO 1302	ISO 406	ISO 1001	MM	D-SUB	
G	EX-1-17899	MP	2014/06/06	ISO 1302	ISO 406	ISO 1001	MM	D-SUB	
		tolerances unless otherwise specified	angles	linear	linear	linear	scale		
		0.05±0.1	0°±2°	0.00±0.1	0.00±0.1	0.00±0.1	2:1		
		PERSON	1995/10/30						
		engr	WITTHUN PAUL	2014/06/06					
		chr	ALAS BABU	2014/06/06					
		appd	BIJU K PAUL	2014/06/06					
		dwg no	C01-8646-0411		sheet 1 of 1				
		type	Product Customer Drawing		size		A3		