
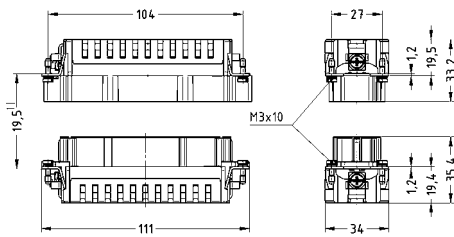

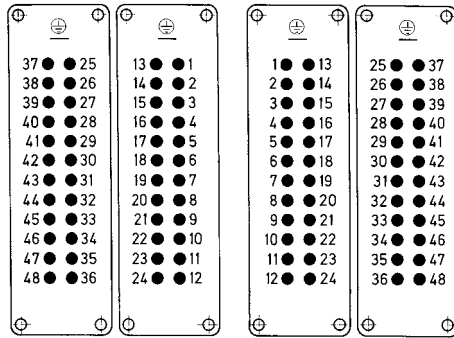
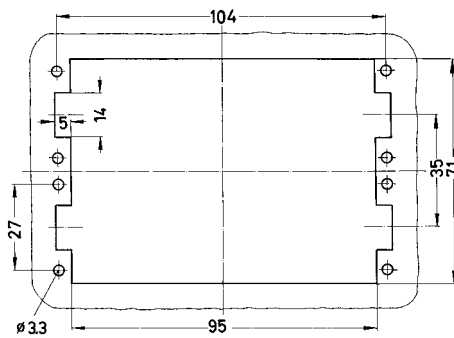


Number of contacts

48+

500 V
16 A

Han
E/EE

Identification	Wire cross section (mm ²)	Part number		Drawing Dimensions in mm
		male	female	
<p>Han® ES, Cage-clamp terminal, 1 - 24, silver plated contacts, contact resistance ≤3 mOhm</p>  <p>Please order two inserts for a complete assembly!</p>	0.14 – 2.5	09 33 024 2616	09 33 024 2716	 <p>1) Distance for contact max. 21 mm</p>
<p>Han® ES, Cage-clamp terminal, 25 - 48, silver plated contacts, contact resistance ≤3 mOhm</p>  <p>Please order two inserts for a complete assembly!</p>	0.14 – 2.5	09 33 024 2626	09 33 024 2726	 <p>Contact arrangement (view from termination side)</p>  <p>Panel cut out</p>