
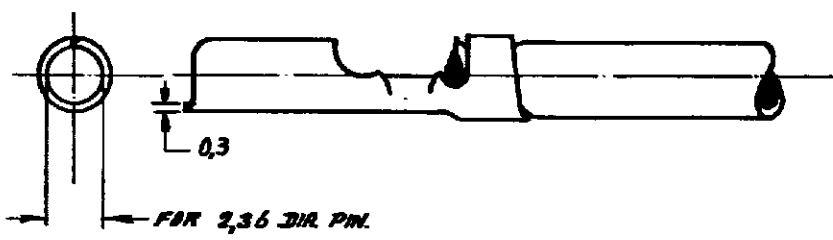


C-160208-E

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
G1	REVISED PER-ECO-09-022178	21SEP09	KK	AEG

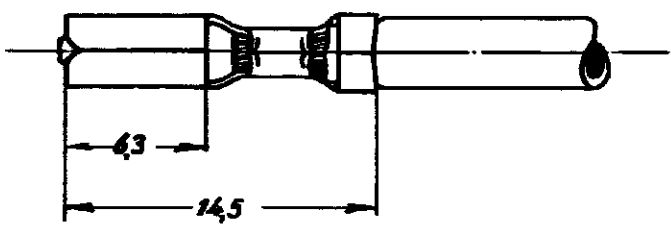

1-160208-2	STEEL	NICKEL
1-160208-1	PHOS. BRONZE	TIN
4-160208-0	STEEL	NICKEL W/ER CO
1-160208-7	BRASS	NONE
1-160208-5	BRASS	NICKEL
160208-4	PHOS. BRONZE	NONE
160208-3	BRASS	SILVER
160208-2	BRASS	TIN
160208-1	BRASS	NONE

1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 * REELED WITH PAPER.
 160208-7 SUITABLE FOR AMP-D-MOTOR APPLICATION (12000 P.C.S. PER REEL)

CUSTOMER COPY FOR REFERENCE ONLY

©1966 BY AMP-HOLLAND N.V. ALL RIGHTS RESERVED AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.



WIRE RANGE	INSUL. RANGE	FIRST USED
25-48 AWG	23-33 P.M.M.	

ORDER NO.	MATERIAL	PLATING
DR. P. J. HONDT. 28/12-66		
DATE	APP. [Signature]	DATE 4-67

SCALE	LOC	SIZE	NO	REV
4:1	H	A	C-160208-E	G1
NAME PIN RECEPTACLE				

DIMENSIONS IN MM DO NOT SCALE PRINT