

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .

© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
G	14	H	REVISE&REDRAW ON CAD/OL20-0142-97	29AUG97	ME SB		

- 1 WIRE INSULATION DIA 1.17-2.29 [.046-.090]
- △2 COPPER PER ASTM B 152
- △3 TIN PLT PER ASTM B 545

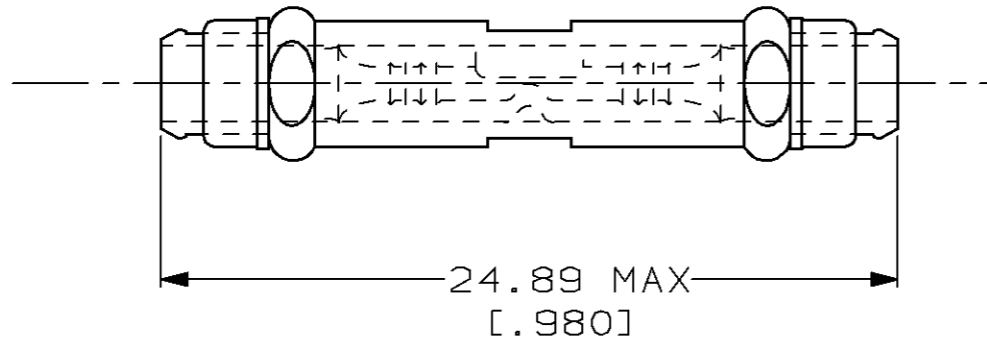

25	LOOSE PIECE	324544
QTY	PACKAGE TYPE	PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: -	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M ELLIS	AMP Incorporated Harrisburg, PA 17105-3608		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -	DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK S BORTNER	ASSEMBLY, SPLICE, BUTT, CERTI-SEAL™, 24-20 AWG		
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: - - - -		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	APVD C FOX	SIZE	CAGE CODE	
FOR ORDER ENTRY	1-800-526-5142		MATERIAL RING & BODY △2 SLEEVE, NYLON, NAT	FINISH RING & BODY △3	PRODUCT SPEC -	DRAWING NO	RESTRICTED TO	
					WEIGHT -	A300779	C=324544	
					CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1	REV H