




Code Conductor, Thin Wall, Tin-Plated, CTAPF



- For copper-to-copper tapping splicing or pigtailing
- Wide wire range-taking capability minimizes inventory requirements
- Color-coded for proper crimp die selection
- Ribbed design provides high strength
- Made from high conductivity wrought copper
- Tin-plated to inhibit corrosion and oxidation
- UL Listed and CSA Certified with AWG conductor to 600 V and temperature rated to 90°C when crimped with Panduit and specified competitor crimping tools and dies

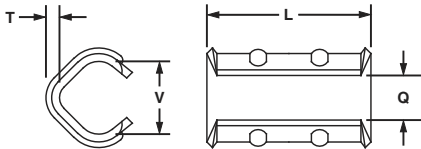

Part Number	Copper Conductor Size		Number of Ribs	Figure Dimensions In.				Panduit Crimping Tool‡	Panduit Color Code	Wire Strip Length In.	Std. Pkg. Qty.
	Run AWG	Tap AWG		L	T	V	Q				
CTAPF4-12TP-C	#6 AWG	#8 – #6 AWG	1	1.25	0.07	0.40	0.28	CT-1700, CT-930, CT-2930/L, CT-2930/LE	Brown	1 5/16	100
	#5, #4 AWG	#12 – #8 AWG									
CTAPF1/0-12TP-L	#2 AWG	#4 – #2 AWG	2	1.82	0.09	0.63	0.42	CT-930, CT-2930/L, CT-2930/LE	Orange	1 7/8	50
	#1 AWG	#4 – #3 AWG									
	1/0 AWG	#12 – #4 AWG									
CTAPF2/0-12TP-Q	#1 AWG	#2 – #1 AWG	2	1.82	0.09	0.71	0.48	CT-930, CT-2930/L, CT-2930/LE	Purple	1 7/8	25
	1/0 AWG	#3 – #2 AWG									
	2/0 AWG	#12 – #3 AWG									

‡See pages M.56 – M.57 of SA-NCCB51 for Panduit and competitor tool and die information.