

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: DC to 2500 MHz
- 1.2 OPERATING RF INPUT POWER LEVEL: 1 WATT MAX.
- 1.3 MAIN RF PATH ATTENUATION: $0.5 \pm 0.15\text{dB}$
- 1.4 SAMPLED PORT COUPLING: $26 \pm 1.2\text{dB}$
- 1.5 VSWR: 1.20:1 MAX.

2.0 FINISH

- 2.1 GREY PER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400

3.0 MARKING: MARK UNIT AS SHOWN.
SLK-08216-82-01

4.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

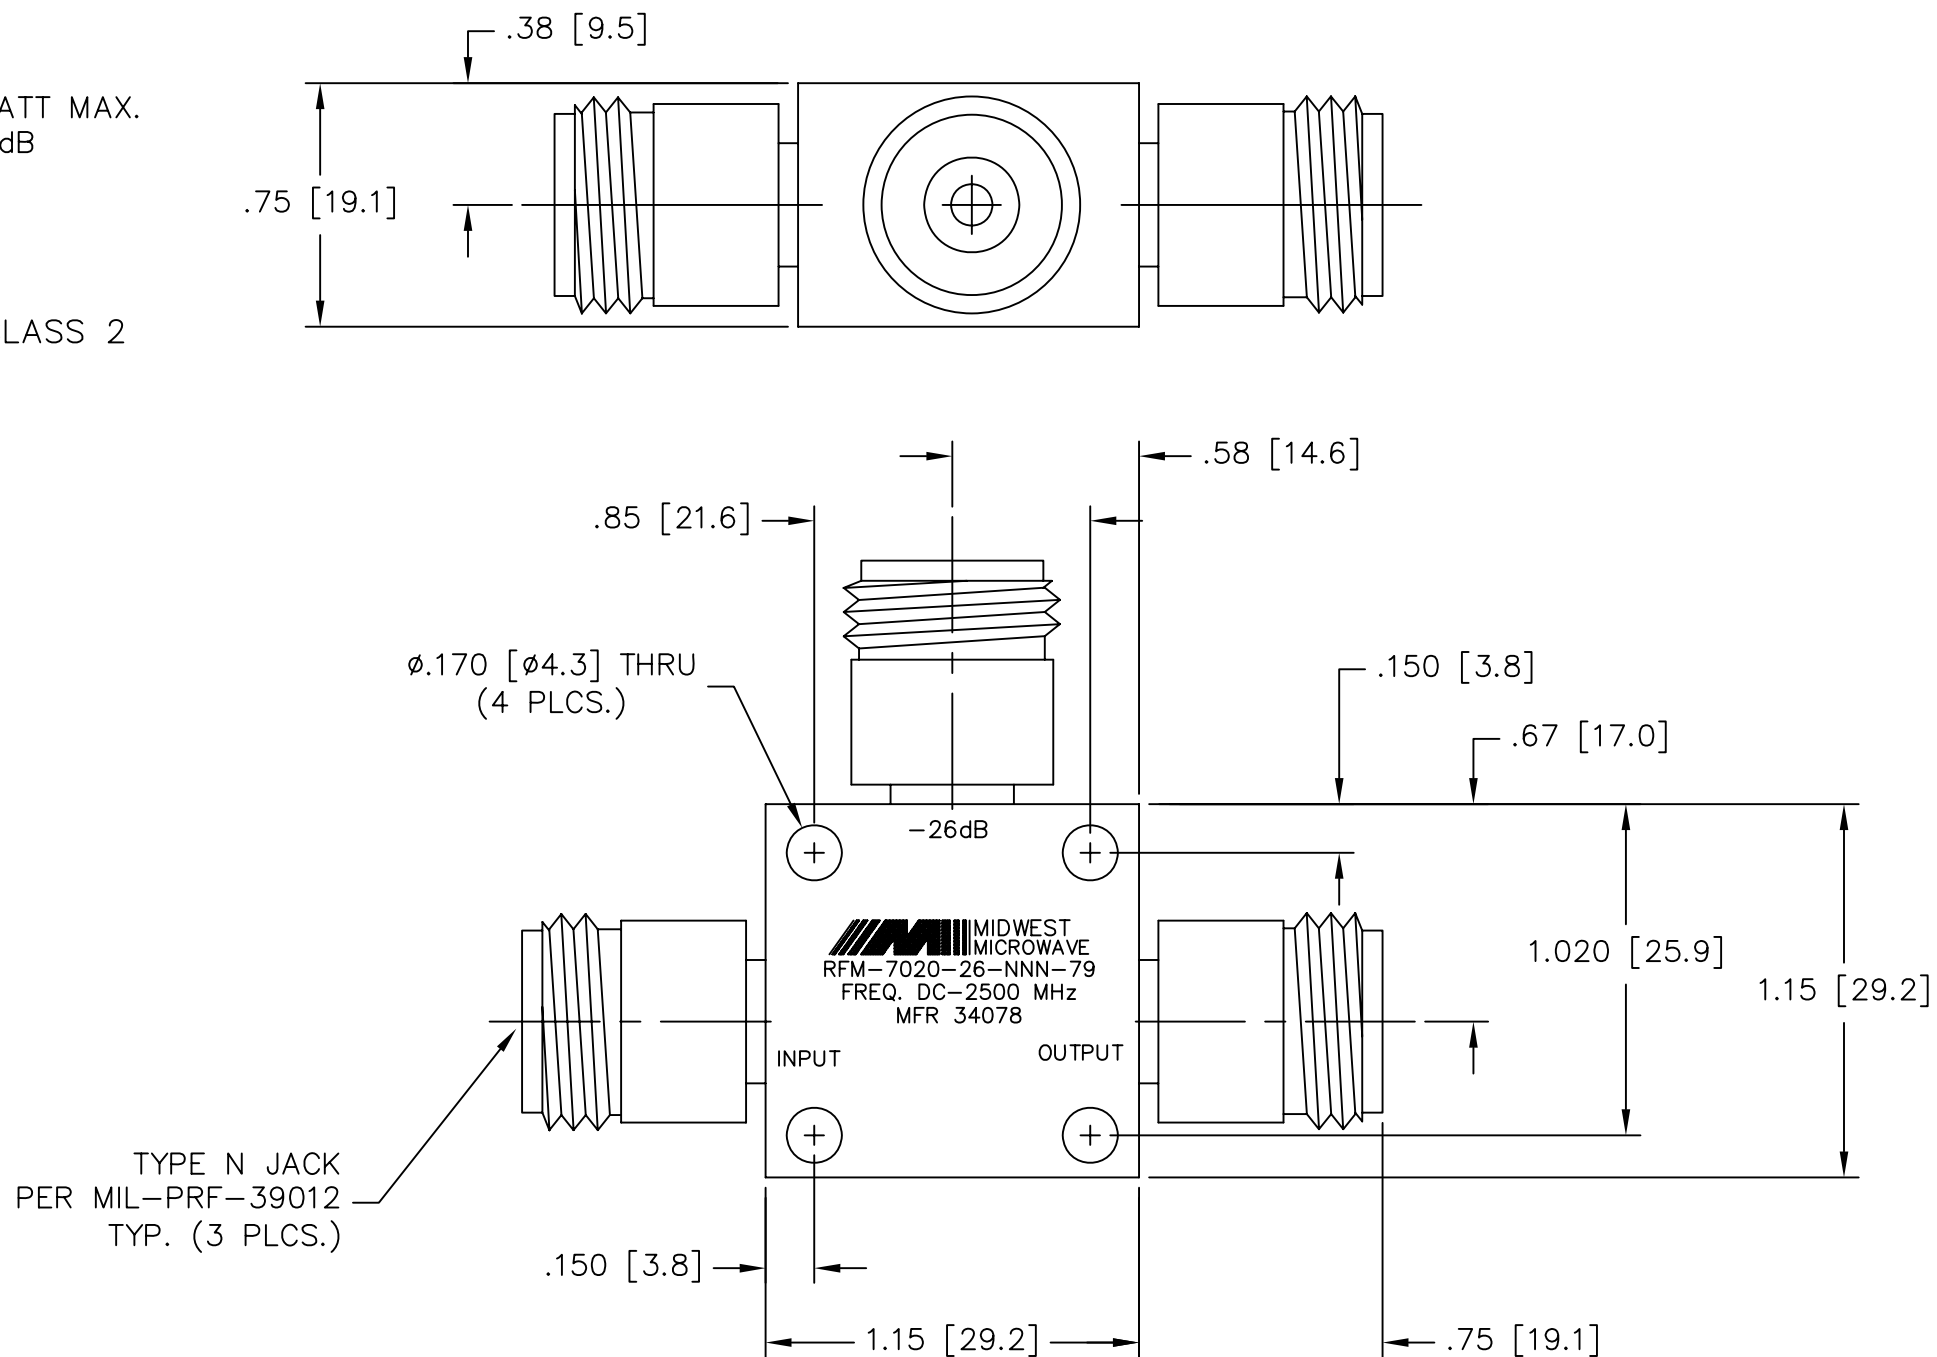

MODEL NUMBER	RFM-7020-26-NNN-79
REV.	-

REV.	-
DESCRIPTION	RELEASED
DATE	2/3/04

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS $\pm .005$ 2 PLACE DECIMALS $\pm .02$ FRACTIONS $\pm 1/64$ PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: $\pm 1^\circ$	FSCM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE RF SIGNAL SAMPLER
	DRAWN/DATE S.ORLOV 2/3/04	ENG./DATE P.GOODMAN 2/3/04	DRAWING NUMBER RFM-7020-26-NNN-79
	CHECKED/DATE	APPROVED/DATE	SCALE: 2=1 SHEET 1 of 1