



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAXIMUM BUNDLE DIAMETER	PACKAGE QUANTITY	LENGTH = "L" ±.3 [7]
MLT2.7WLH-LP	2.7" [69]	50	10.2" [259]
MLT4WLH-LP	4" [102]	50	14.3" [362]
MLT6WLH-LP	6" [152]	50	20.5" [521]
MLT8WLH-LP	8" [203]	50	26.8" [679]

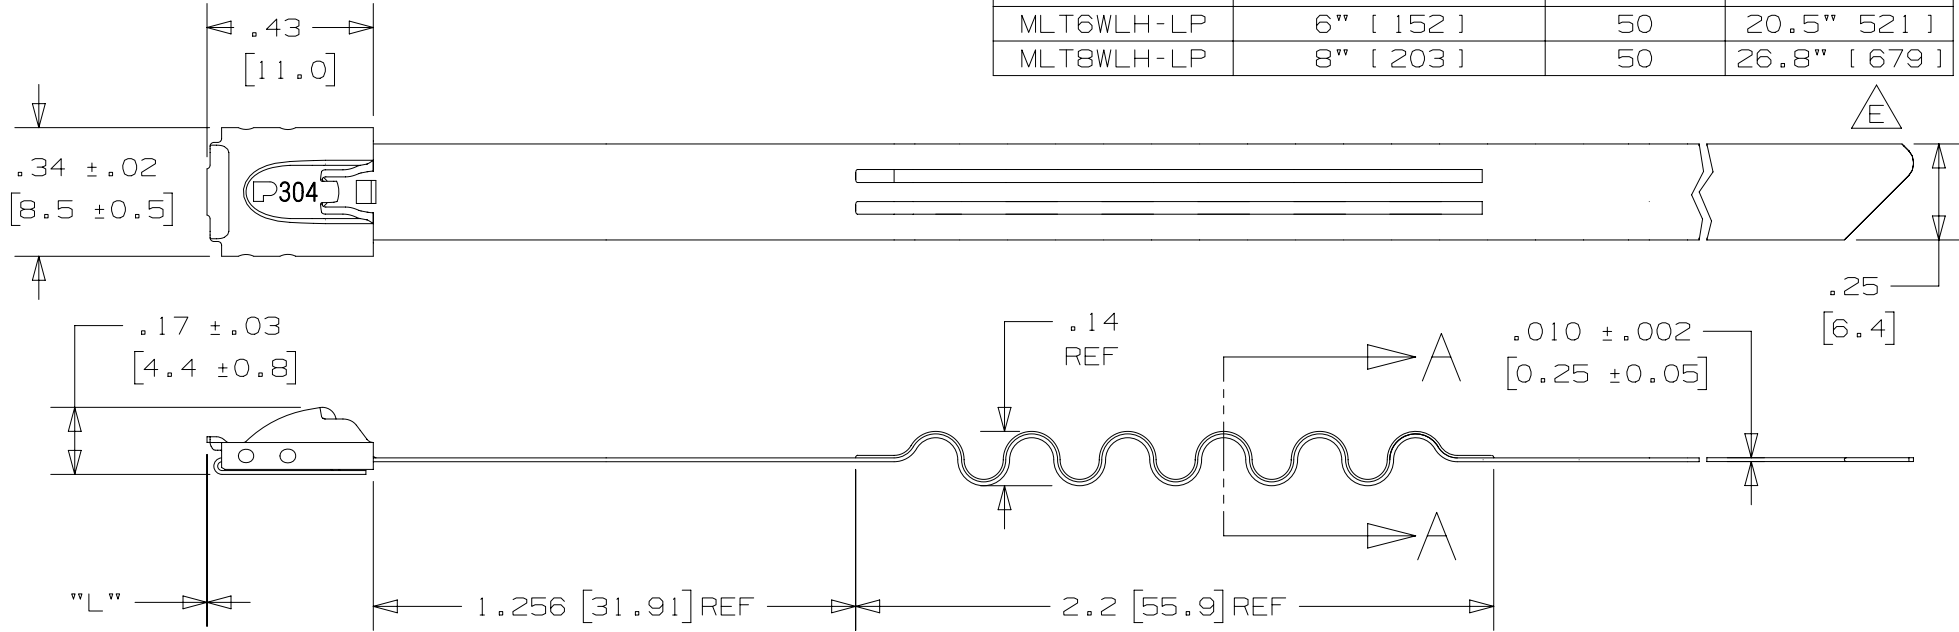

NOTES:

1. APPLICATION TOOLS - PPTMT, GS4MT, ST2MT, ST3MT, AND HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 3" MANDREL. PART NO. MLT2.7WLH-LP TESTED ON A 1 1/2" MANDREL.
3. [] DENOTES DIMENSION IN MILLIMETERS.
4. TOLERANCES: .XXX = ±.010 [.25]
.XX = ±.02 [.5]
.X = ±.03 [.8]
ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

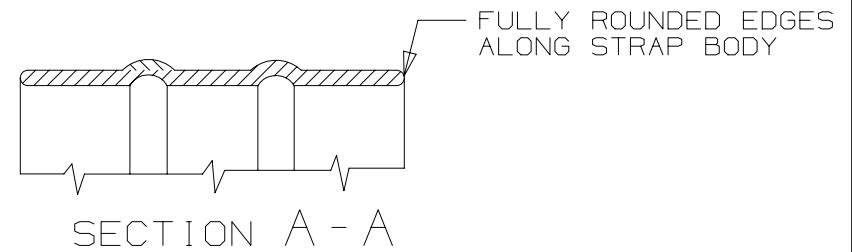

TITLE									
WAVE-TY LIGHT-HEAVY									
CUSTOMER DRAWING									
ITEM REVISION NAME	N41137BS/05								
DATASET FILE NAME	N41137BS/05								
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	MATERIAL: 304 STAINLESS STEEL								
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °									
THIRD ANGLE PROJECTION									
DRAWN BY	JAMB								
DATE	03/03								
CHK	DPN								
SCALE	2:1								
DRAWING NUMBER: N41137BS_DC									
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	SHT 1 OF 1	SIZE	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
5	10.02.15	BDK	SKB	RGRO	E. CHANGED BODY TIP CONFIGURATION	N41137BS_DC