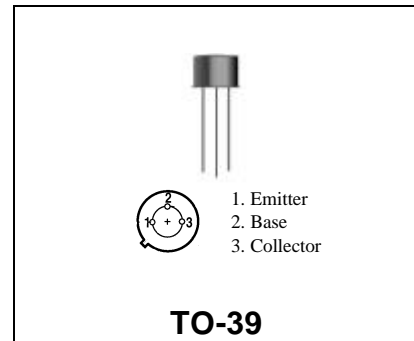


SD1444
**RF & MICROWAVE TRANSISTORS
450-512MHz CLASS C MOBILE APPLICATIONS**
Features

- 470 MHz
- 12.5 VOLTS
- $P_{OUT} = 4.0$ WATTS
- $G_P = 12.0$ dB MINIMUM
- COMMON EMITTER

DESCRIPTION:

The SD1444 is a 12.5V epitaxial silicon NPN planar transistor designed primarily for UHF communications. This device is packaged in a grounded emitter TO-39 package for increased power gain and optimum heat dissipation.


ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	36.0	V
V_{CEO}	Collector-Emitter Voltage	16.0	V
V_{EBO}	Emitter – Base Voltage	4.0	V
I_C	Collector Current	0.40	A
P_{tot}	Total Power Dissipation	5.0	W
T_{STG}	Storage Temperature	-65 + 200	°C
T_J	Junction Temperature	+200	°C

THERMAL DATA

$R_{TH(J-C)}$	Junction-case Thermal Resistance	35.0	°C/W
---------------	----------------------------------	------	------

ELECTRICAL SPECIFICATIONS (T_{case} = 25°C)
STATIC

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV_{CES}	I_C = 50 mA	V_{BE} = 0	36	---	---	V
BV_{CEO}	I_C = 50 mA	I_B = 0	16	---	---	V
BV_{EBO}	I_E = 1 mA	I_C = 0	4.0	---	---	V
I_{CBO}	V_{CB} = 15 V	I_E = 0	---	---	1.0	mA
H_{FE}	V_{CE} = 5 V	I_C = 50 mA	20	---	200	---

DYNAMIC


Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
P_{OUT}	f = 470 MHz	V_{CE} = 12.5 V	2.0	---	---	W	
G_{PE}	f = 470 MHz	V_{CE} = 12.5 V	8.0	---	---	dB	
Cob	V_{CE} = 15.0 V	f = 1 MHz	---	---	15.0	pf	

IMPEDANCE DATA

FREQ	Z _{IN} (Ω)	Z _{CL} (Ω)
470 MHz	2.9 + j 0.6	15.6 – j 10.2

P_{OUT} = 2W
V_{CC} = 12.5V

TEST CIRCUIT

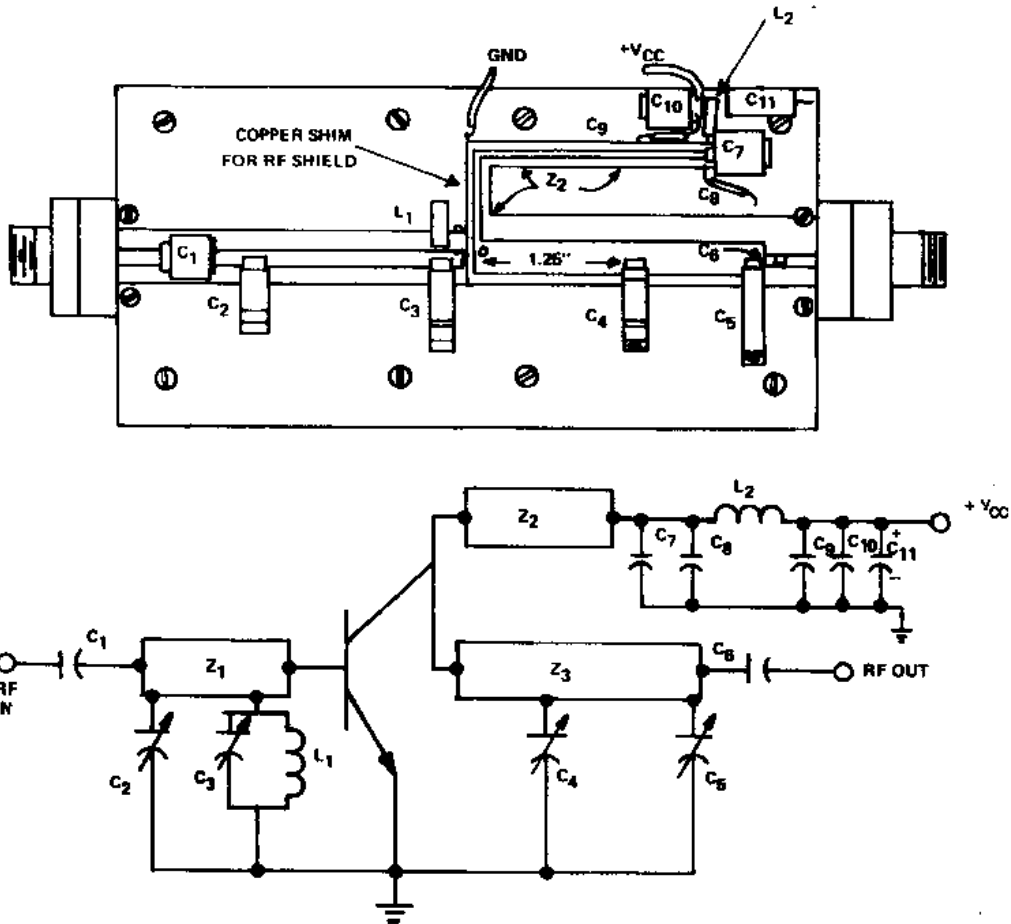

COMPONENT LIST


- C₁, C₇, C₁₀ 1000pf UNELCO
- C₂ 0.8 – 10pf, VOLTRONICS AJ10
- C₃, C₄ 1.0 – 20pf, JOHANSON 5500
- C₅ 1.0 – 30pf, JOHANSON 5600
- C₆ 1000pf CHIP CAPACITOR
- C₈, C₉ 0.01µf DISC-CERAMIC
- C₁₁ 10µf, 35V ELECTROLYTIC

- L₁ 0.47µh MOLDED CHOKE
 - L₂ 2.2µh MOLDED CHOKE
 - Z₁ 2.25" x 0.185"
 - Z₂ 2.50" x 0.0625"
 - Z₃ 2.25" x 0.185"
- BOARD MATERIAL – 3M-K6098,
1/16" THK

S68SD1444-06

PACKAGE MECHANICAL DATA

PACKAGE STYLE M246

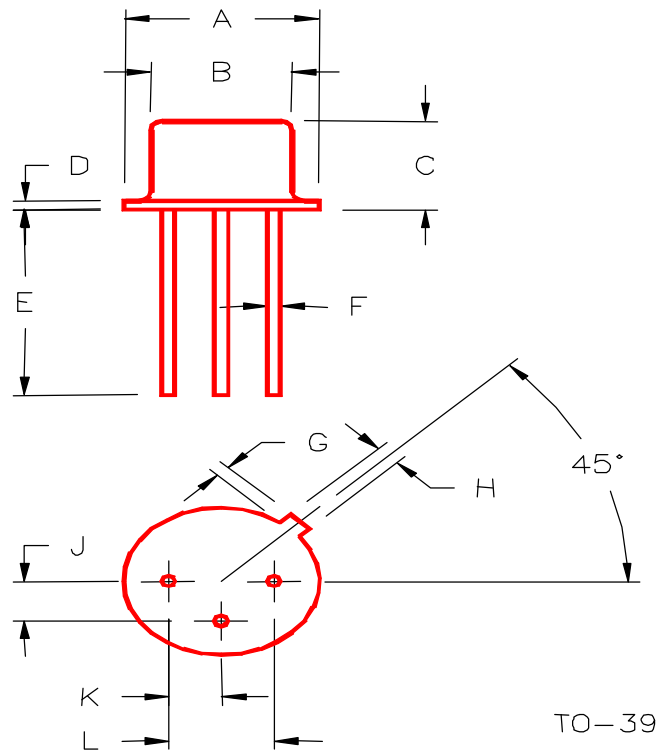

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM		MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	.350/8,89	.370/9,40	J	.095/2,41	.105/2,67
B	.315/8,00	.335/8,51	K	.095/2,41	.105/2,67
C	.240/6,10	.260/6,60	L	.190/4,83	.210/5,33
D	.015/0,38	.045/1,14			
E	.500/12,70				
F	.016/0,41	.019/0,48			
G	.029/0,74	.040/1,02			
H	.028/0,71	.034/0,86			