

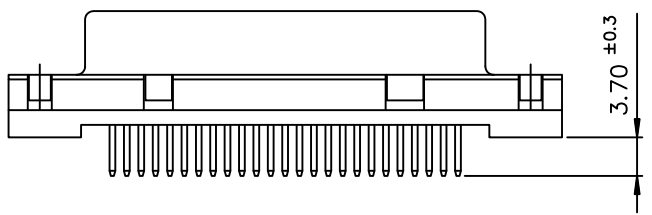
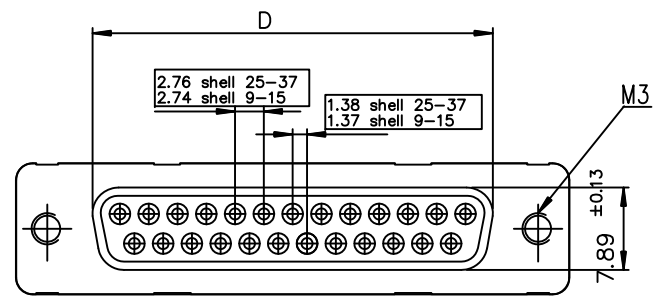


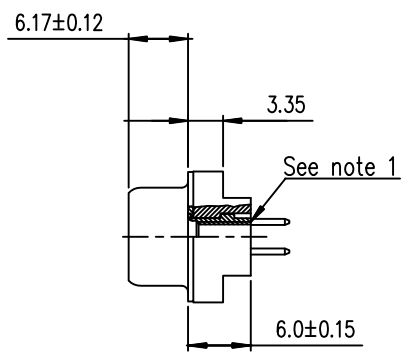


FCIconnect.com

Copyright FCI

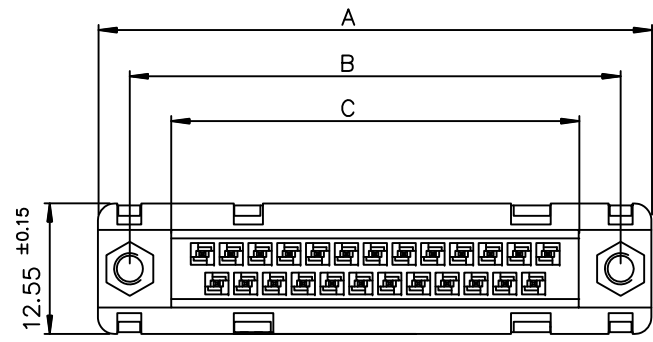

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

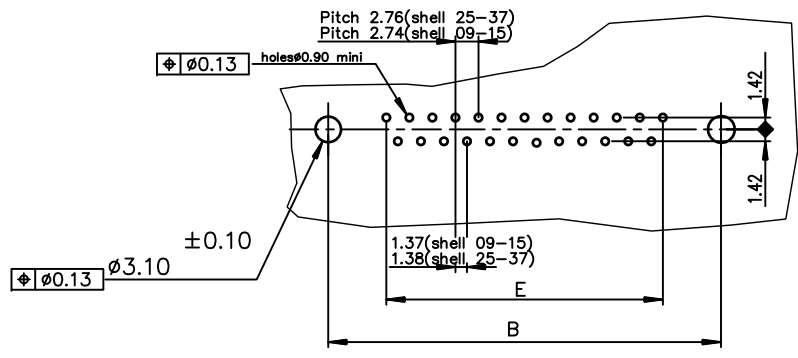

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24B.PL00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24B.PL00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24B.PL00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24B.PL00LF

Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6±0.15 mm.

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family	
-		✓		✓		MM		D-SUB	
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM		title	
E	ELX-I-21256	AB	2015/07/14			scale 2:1		FEMALE CONNECTOR DELTA-D	
				angles	linear			STRAIGHT - SOLDER TYPE FOR PCB 2.4mm	
				0°±2'	.0±0.1			dwg no	
					.00±0.1			sheet 1 of 1	
					.000±0.1			size	
				dr	LELEON	1992/09/16		A3	
				engr	ALIAS BABU	2015/07/14		C01-8646-0121	
				chr	MITHUN PAUL	2015/07/14		type	
				app	BIJU K PAUL	2015/07/14		Product Customer Drawing	
sheet index	revision	E							
	sheet	1							