
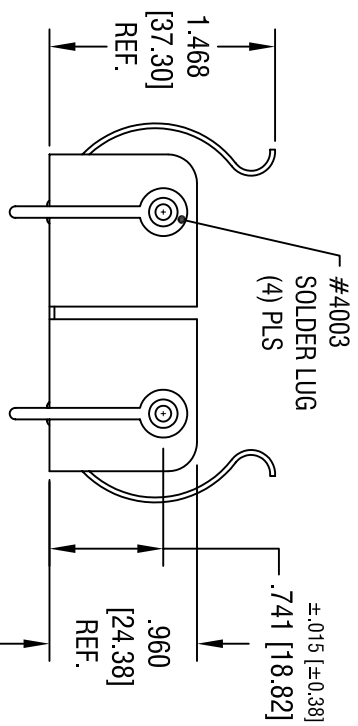
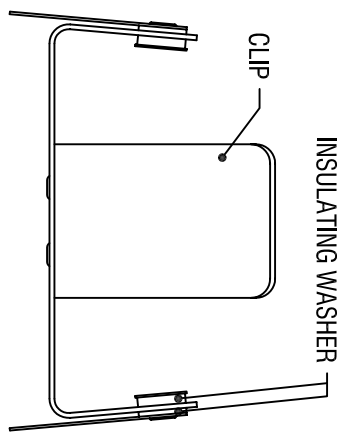
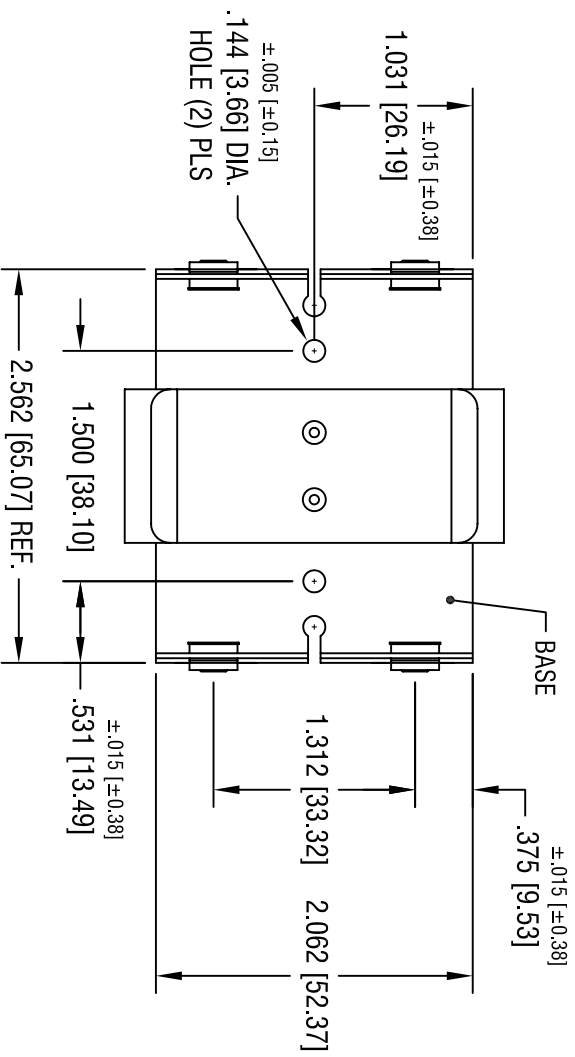


RECOMMENDED SPACING FOR PC LUGS

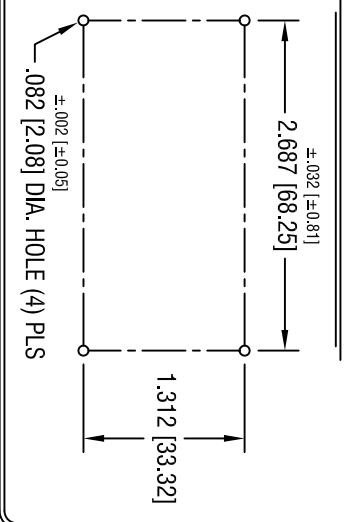

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

DATE	DESCRIPTION	REV.

- NOTES:
1. BASE: MAT'L - .032 [.81] THK ALUMINUM
  - CLIP: MAT'L - .032 [.81] THK ALUMINUM
  - SOLDER LUG: MAT'L - BRASS
  - FINISH - TIN PLATE

**KEYSTONE ELECTRONICS CORP.**

ASTORIA, N.Y. 11105-2017

PART NAME	BATTERY HOLDER, (2) 'D' CELLS		
MATERIAL	AS NOTED		
FINISH	AS NOTED		

DRN BY	BOONE	DATE	6.22.07
App'D	LN	SCALE	.8X
App'D	LN	SCALE	.8X
TOLERANCES	INCH	[MM]	CODE
DECIMAL	± .010	[± 0.25]	C
ANGULAR	± 1°		
UNLESS OTHERWISE SPECIFIED			
DWG NO.		2227	