




NOTE 1 This product is packaged in tray. (35pcs/tray)
 2 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level. Also, black spot could be observed on the surface of housing.
 3 For the contact NO., adjacent two pairs of leads placed back-to-back (4 leads in total) Compose one line.
 4 Misalignment absorbing range: ± 0.3mm max.
 5 The dimension in parentheses are for references.
 6 Lot NO. is indicated at either one of the position as shown.

2	Copper alloy	Contact area:Gold-plating 0.1μm Lead area:Tin-plating 1.0μm Under plating:Nickel 1.0μm	4	Polystyrene	
1	Polyamide	Black UL94V-0	3	Phosphor bronze	Tin-plating 3.0μm Under plating:Nickel 1.0μm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 14.09.12	CHECED : KN. SHIBUYA 14.09.12	DESIGNED : DK. AIMOTO 14.09.12	DRAWN : DK. AIMOTO 14.09.12
				DRAWING NO.	EDC3-359162-00
				PART NO.	FX30B-3P-7.62DSA30
				CODE NO.	CL570-3305-6-00
				DATE	1/2

Recommended hole pattern dimension of PCB(5:1)
 (Connector mounting side, PCB thickness:t=1.6mm)

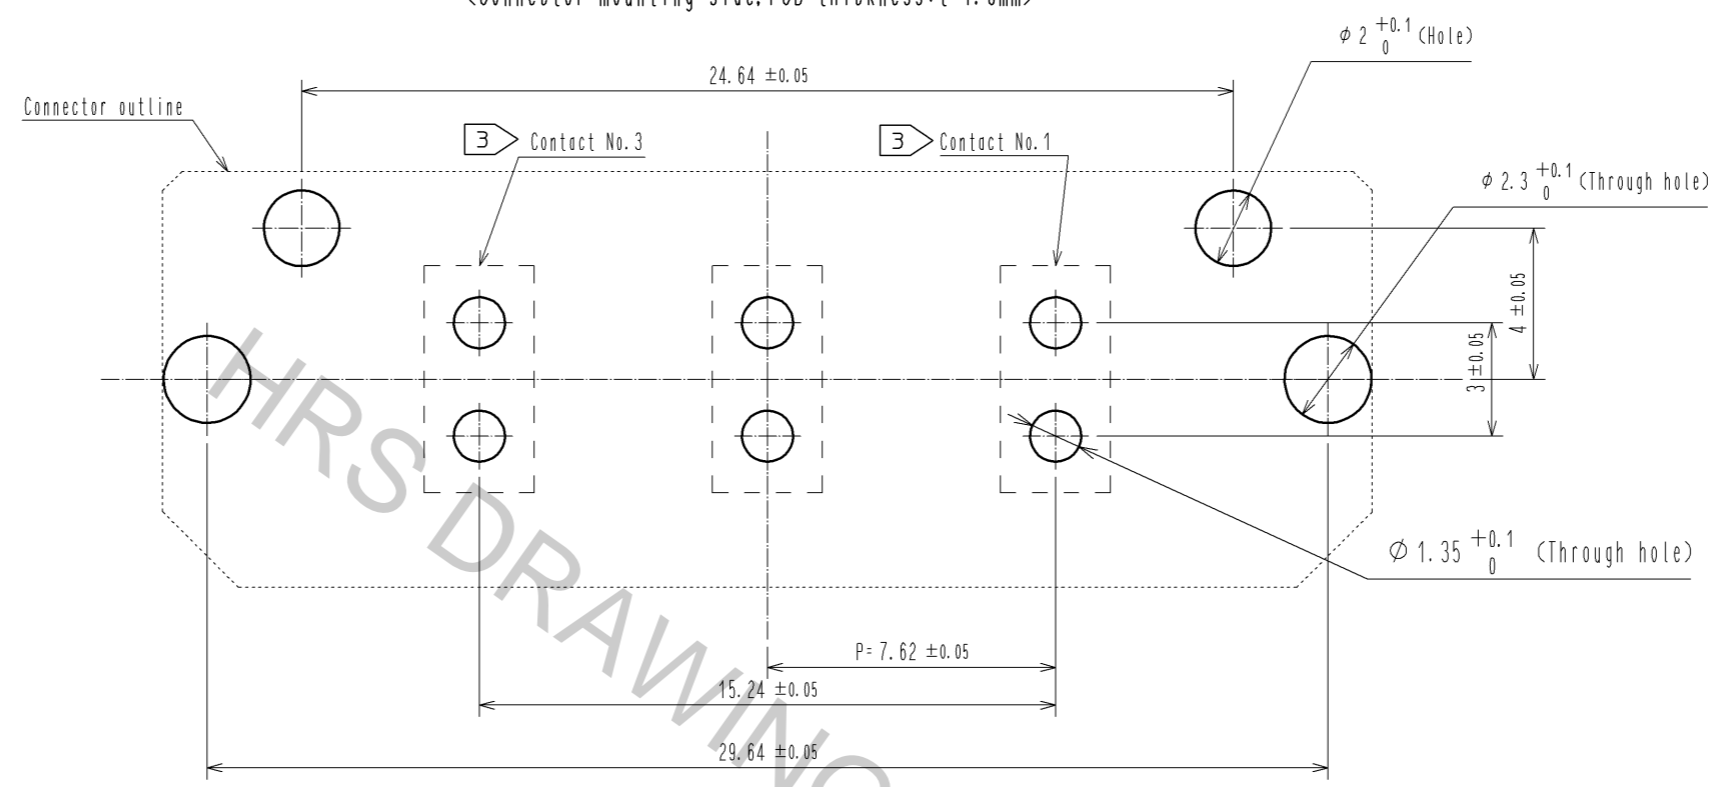

1 Drawing for packaging(1:2)

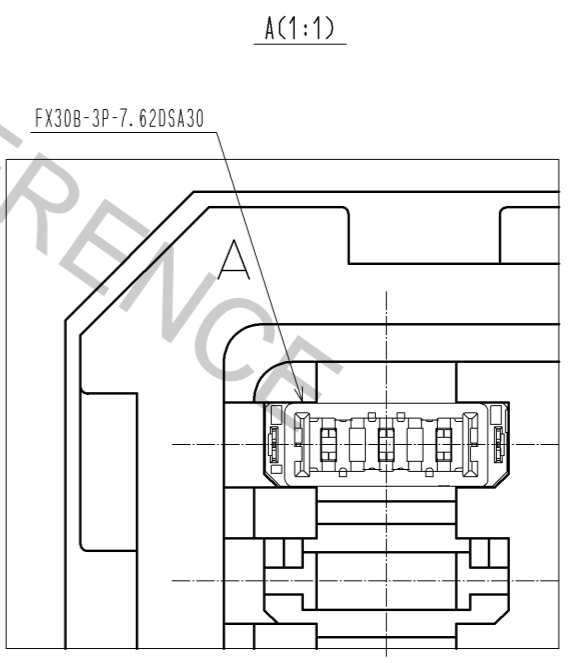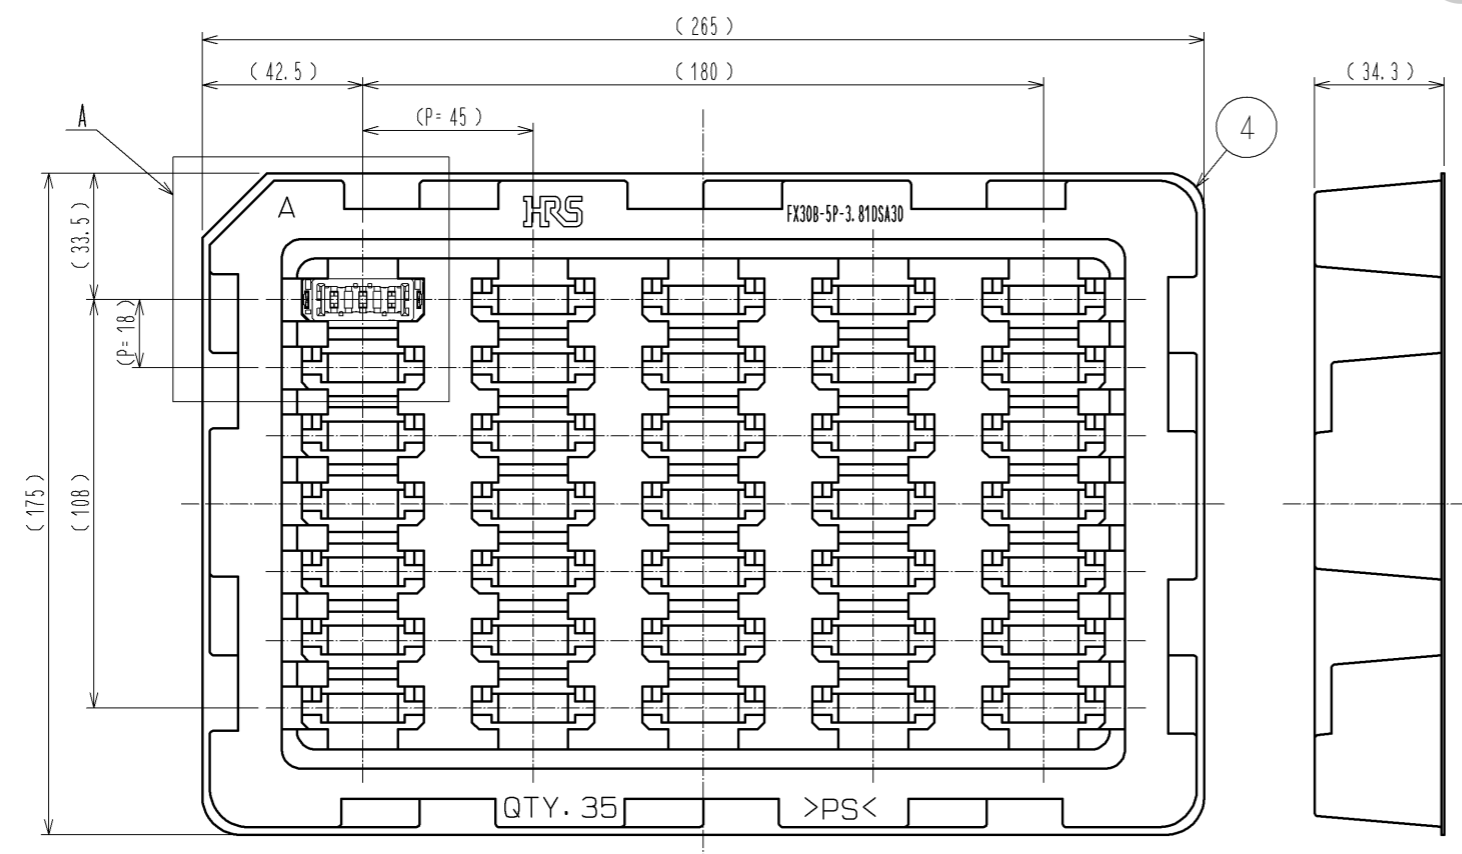

HRS	DRAWING NO.	EDC3-359162-00	△ 2/2
	PART NO.	FX30B-3P-7.62DSA30	
	CODE NO.	CL570-3305-6-00	