

## Bus system flat-type plug - SACCBP-M12MSB-2CON-M16/1,0-910 - 1534355

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Bus system flush-type plug, PROFIBUS, 2-pos., M12, shielded, B-coded, rear/screw mounting with M16 thread, with 1 m bus cable, 2 x 0.25 mm<sup>2</sup>



### Key commercial data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 1      |
| Weight per Piece (excluding packing) | 99.7 GRM |
| Custom tariff number                 | 85444290 |
| Country of origin                    | Germany  |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 1 m |
|-----------------|-----|

#### Ambient conditions

|                                 |   |
|---------------------------------|---|
| Ambient temperature (operation) | -20 °C ... 80 °C (cable, flexible installation) |
| Degree of protection            | IP67  |

#### General

|                        |                               |
|------------------------|-------------------------------|
| Rated current at 40°C  | 4 A                           |
| Rated voltage          | 60 V                          |
| Number of positions    | 2                             |
| Contact resistance     | ≤ 3 mΩ                        |
| Insulation resistance  | ≥ 100 MΩ                      |
| Coding                 | B - inverse                   |
| Standards/regulations  | M12 connector IEC 61076-2-101 |
| Status display         | No                            |
| Surge voltage category | II                            |

## Bus system flat-type plug - SACCBP-M12MSB-2CON-M16/1,0-910 - 1534355

### Technical data

#### General

|                  |        |
|------------------|--------|
| Pollution degree | 3      |
| Test voltage     | 2500 V |

#### Material

|   |                     |
|---|---------------------|
| Inflammability class according to UL 94 | V0                  |
| Contact material                        | CuZn                |
| Contact surface material                | Ni/Au               |
| Contact carrier material                | PA 66               |
| Material, knurls                        | Nickel-plated brass |
| Sealing material                        | NBR                 |

#### Cable

|                                    |  |
|------------------------------------|--|
| Cable type                         | PROFIBUS   |
| Cable type (abbreviation)          | 910  |
| UL AWM style                       | 21198 (80°C/300 V)   |
| Conductor cross section            | 2x 0.25 mm <sup>2</sup> (signal line)                      |
| AWG signal line                    | 24   |
| Conductor structure signal line    | 19x 0.13 mm  |
| Core diameter including insulation | 2.55 mm ±0.07 mm   |
| Wire colors                        | Red, green   |
| Overall twist                      | 2 cores with 2 fillers to the core                         |
| Shielding                          | Plastic-coated aluminum foil, tinned copper braided shield |
| Optical shield covering            | 85 %   |
| External sheath, color             | Violet, RAL 4001   |
| External cable diameter D          | 7.8 mm ± 0.2 mm  |
| Number of bending cycles           | 4000000  |
| Bending radius                     | 65 mm  |
| Traversing path                    | 4.5 m  |
| Traversing rate                    | 3 m/s  |
| Acceleration                       | 3 m/s <sup>2</sup>   |
| Max. bending cycles                | 5000000  |
| Bending radius                     | 80 mm  |
| Traversing path                    | 4.5 m  |
| Traversing rate                    | 3 m/s  |
| Acceleration                       | 3 m/s <sup>2</sup>   |
| Outer sheath, material             | PUR  |
| Material conductor insulation      | Foamed PE  |

## Bus system flat-type plug - SACCBP-M12MSB-2CON-M16/1,0-910 - 1534355

### Technical data

#### Cable

|                                 |   |
|---------------------------------|---|
| Conductor material              | Tin-plated Cu litz wires                        |
| Insulation resistance           | $\geq 5 \text{ G}\Omega\cdot\text{km}$          |
| Conductor resistance            | 157.2 $\Omega/\text{km}$                        |
| Working capacitance             | 30 nF   |
| Wave impedance                  | nom. 150 $\Omega \pm 10 \%$ (3 MHz ... 20 MHz)  |
| Shield attenuation              | $\leq 4.9 \text{ dB}$ (at 16 MHz)               |
| Nominal voltage, cable          | 30 V  |
| Test voltage Core/Core          | 1500 V (50 Hz, 1 min.)                          |
| Test voltage Core/Shield        | 1500 V (50 Hz, 1 min.)                          |
| Flame resistance                | UL 1581, Sec. 1060 (FT-1)                       |
|                                 | IEC 60332-1                                     |
| Other resistance                | Low adhesion                                    |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)    |
|                                 | -30 °C ... 70 °C (cable, flexible installation) |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140815 |
| eCl@ss 4.1 | 27140815 |
| eCl@ss 5.0 | 27143423 |
| eCl@ss 5.1 | 27143423 |
| eCl@ss 6.0 | 27143423 |
| eCl@ss 7.0 | 27449001 |
| eCl@ss 8.0 | 27449001 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001297 |
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC002061 |
| ETIM 5.0 | EC002061 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |

# Bus system flat-type plug - SACCBP-M12MSB-2CON-M16/1,0-910 - 1534355

## Classifications

### UNSPSC

|              |          |
|--------------|----------|
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2  | 31251501 |

## Approvals

### Approvals

---

#### Approvals

GOST / GOST

---


#### Ex Approvals

---

#### Approvals submitted

---


## Approval details




## Drawings

# Bus system flat-type plug - SACCBP-M12MSB-2CON-M16/1,0-910 - 1534355

Dimensioned drawing




Schematic diagram



Pin assignment M12 male connector, 5-pos., B-coded, male side


Housing cutout for M16 fastening thread, mounting panel with feed-through hole (alternatively with surface as protection against rotation)

Cable cross section




PROFIBUS [910]

Dimensioned drawing

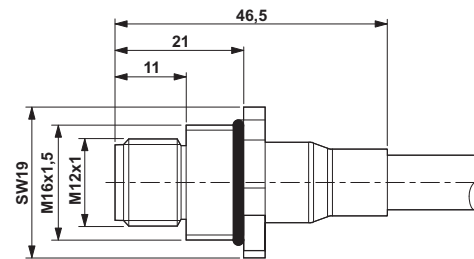

M12 flush-type plug

Circuit diagram

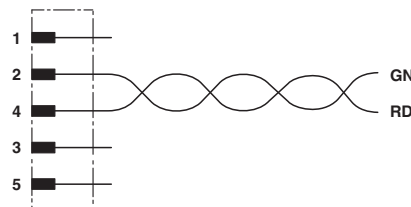

Contact assignment of the M12 plug