

SUMMARY



Image is for illustrative purpose only

Wires

Low	9
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Download

[Request a quote](#)

[Catalog](#)

Series	0T
Termination type	Female solder
IP rating	68
Cable Ø	0.00 - 0.00 mm
Matching parts	FGG.0T.309.KLAC50
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	EGG*: Straight plug, cable collet and nut for fitting a bend relief, POM outer shell
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (black chrome) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	

Performance

Configuration	
Insulator	
Rated Current	2 Amps

Specifications

Contact Type:	Solder
Max. Matings:	5000
Contact Dia.:	0.5 mm (0.02in)
Bucket Dia.:	0.45 mm (0.018in)
Max. Solid Conductor:	0.09 mm ² (AWG 28)
Max. Stranded Conductor:	0.09 mm ² (AWG 28)


R (max): 8.7 mOhm
Vtest: 500 V (DC)400 V (AC)

Others

Temp (min / max): -55 °C / +200 °C
Humidity (max): <=95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >144 hr
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
IP Rating: 68

DRAWINGS

Draws

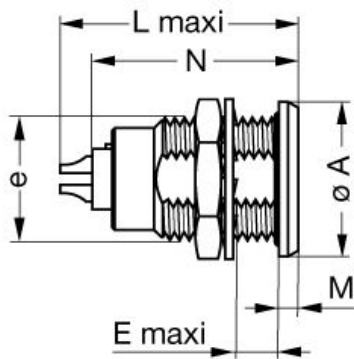

Dimensions

	A	B	C	E	L	M	N	e
mm.	12	8.3	9.1	6	21	1.5	19.1	M9x0.6
in.	0,47	0,33	0,36	0,24	0,83	0,06	0,75	

RECOMMENDED BY LEMO

Tools

None

Cables

CMN.09.T28.050CNQZ			
CMN.09.T28.051PGCE	PVC	GREY	
CMN.09.T28.051PGZE		Grey	
CMN.09.T28.051PNCE	PVC	Black	
CMN.09.T28.051PNZE			
CMN.09.T28.051QGZE	TPR (medical)	Grey	