

## Network cable - NBC-MSD/10,0-93G SCO - 1407560

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Network cable, EtherCAT® CAT5 (100 Mbps), EtherCAT® CAT5e (100 Mbps), 4-position, PVC, Green RAL 6018, shielded, Plug Straight M12 SPEEDCON / IP67, Coding: D, on Free cable end, Cable length: 10 m



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 pc     |
| Custom tariff number | 85444210 |
| Country of origin    | Poland   |

### Technical data

#### Dimensions

|                 |      |
|-----------------|------|
| Length of cable | 10 m |
|-----------------|------|

#### Ambient conditions

|                      |      |
|----------------------|------|
| Degree of protection | IP65 |
|                      | IP67 |

#### General data

|                       |   |
|-----------------------|---|
| Rated current at 40°C | 4 A                                       |
| Rated voltage         | 250 V                                     |
| Number of positions   | 4   |
| Signal type/category  | EtherCAT® CAT5 (IEC 11801:2002), 100 Mbps |
|                       | EtherCAT® CAT5e (TIA 568B:2001), 100 Mbps |
| Standards/regulations | M12 connector IEC 61076-2-101             |

#### Characteristics head 1

|  |                                   |
|--|-----------------------------------|
| Head type                                | Plug Straight M12 SPEEDCON / IP67 |
| No. of positions (pin connector pattern) | 4                                 |
| Coding                                   | D (Data)                          |

## Network cable - NBC-MSD/10,0-93G SCO - 1407560

### Technical data

#### Characteristics head 1

|                                 |  |
|---------------------------------|--|
| Color                           | black  |
| Material (component)            | CuSn (Contact)                                     |
|                                 | Ni/Au (Contact surface)                            |
|                                 | PA (Contact carriers)                              |
|                                 | TPU, hardly inflammable, self-extinguishing (Grip) |
|                                 | Zinc die-cast, nickel-plated (Screw connection)    |
| Contact resistance              | ≤ 5 mΩ   |
| Insulation resistance           | ≥ 100 MΩ   |
| Insertion/withdrawal cycles     | ≥ 100  |
| Torque                          | 0.4 Nm   |
| Ambient temperature (operation) | -25 °C ... 90 °C                                   |

#### Characteristics head 2

|           |                |
|-----------|----------------|
| Head type | Free cable end |
|-----------|----------------|

#### Cable

|   |  |
|---|--|
| Cable type                                    | EtherCAT®  |
| Cable type (abbreviation)                     | 93G  |
| UL AWM style                                  | 21694  |
| Signal type/category                          | EtherCAT® CAT5 (IEC 11801:2002)                    |
|   | EtherCAT® CAT5e (TIA 568B:2001)                    |
| Cable structure                               | 1x4xAWG22/7; SF/TQ                                 |
| Conductor cross section                       | 4x 0.34 mm <sup>2</sup>                            |
| AWG signal line                               | 22   |
| Conductor structure signal line               | 7x 0.25 mm   |
| Core diameter including insulation            | approx. 1.5 mm                                     |
| Wire colors                                   | White, yellow, blue, orange                        |
| Overall twist                                 | Star quad  |
| Shielding                                     | Aluminum-coated foil, tinned copper braided shield |
| Optical shield covering                       | 85 %   |
| External sheath, color                        | Green RAL 6018                                     |
| Outer sheath thickness                        | approx. 0.9 mm                                     |
| External cable diameter D                     | 6.5 mm ±0.2 mm                                     |
| Minimum bending radius, fixed installation    | 3 x D  |
| Minimum bending radius, flexible installation | 7 x D  |
| Cable weight                                  | 67 kg/km   |
| Outer sheath, material                        | PVC  |
| Material, inner sheath                        | PVC  |

## Network cable - NBC-MSD/10,0-93G SCO - 1407560

### Technical data

#### Cable

|   |   |
|---|---|
| Material conductor insulation           | PE  |
| Conductor material                      | Tin-plated Cu litz wires  |
| Insulation resistance                   | ≥ 500 MΩ*km   |
| Conductor resistance                    | ≤ 120000000 Ω/km  |
| Working capacitance                     | 52 pF   |
| Wave impedance                          | 100 Ω ±15 Ω (at 100 MHz)  |
| Signal runtime                          | 5.3 ns/m  |
| Coupling resistance                     | ≤ 20.00 mΩ/m  |
| Nominal voltage, cable                  | 600 V   |
| Test voltage Core/Core                  | 2000 V (50 Hz, 1 min.)  |
| Test voltage Core/Shield                | 2000 V (50 Hz, 1 min.)  |
| Flame resistance                        | According to UL 1685 (CSA FT 4)   |
| Ambient temperature (operation)         | -40 °C ... 70 °C (cable, fixed installation)<br>-40 °C ... 70 °C (cable, flexible installation) |
| Ambient temperature (installation)      | -20 °C ... 60 °C  |
| Ambient temperature (storage/transport) | -50 °C ... 70 °C  |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060307 |
| eCl@ss 4.1 | 27060307 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27060307 |
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000830 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 26121616 |
| UNSPSC 7.0901 | 26121616 |
| UNSPSC 11     | 26121604 |
| UNSPSC 12.01  | 26121616 |

# Network cable - NBC-MSD/10,0-93G SCO - 1407560


## Classifications

UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 26121616 |
|-------------|----------|


## Drawings

Schematic diagram




Pin assignment M12 male connector, 4-pos., D-coded, male side

Cable cross section




EtherCAT® [93G]

Circuit diagram

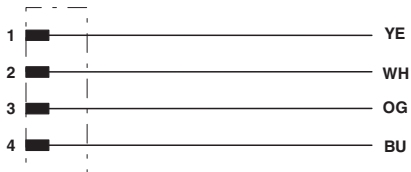

Contact assignment of the M12 plug

Dimensioned drawing

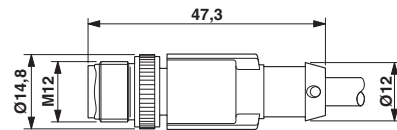

Plug, M12 x 1, straight, shielded