



300W052

a) Part as supplied

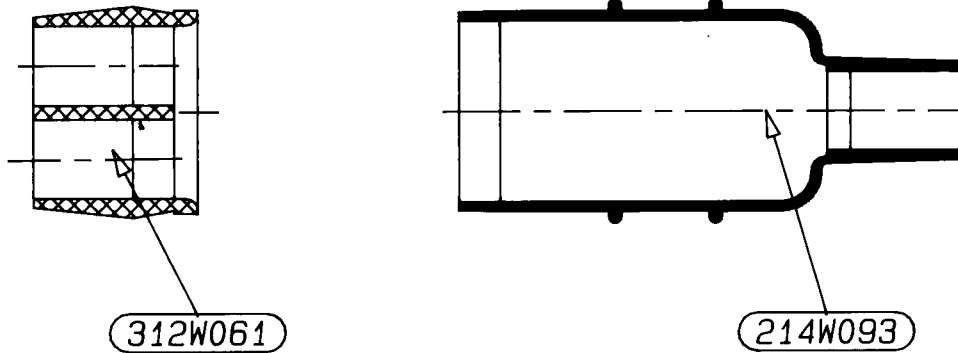

b) Part after unrestricted recovery

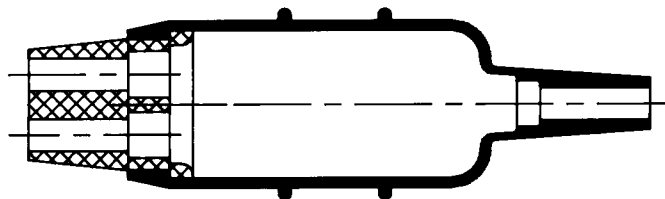

SEE COMPONENT DRAWINGS FOR DIMENSIONS

Copyright (!)

Urheberrechte

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn A.LILLEY. Checked *sh* Issue 1 Date January 1992 Conforms to ISO Recommendations


Approval
Design

AAPS

MKTG.

Hewitt G.C.

3rd Angle Projection
Not to Scale



Iss.	Date	E.C.R. No.	Details of Change

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Thermofit Division Europe,
 Swindon, Wiltshire, England.
 Telephone: (0793) 528171 Fax: 697923