


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

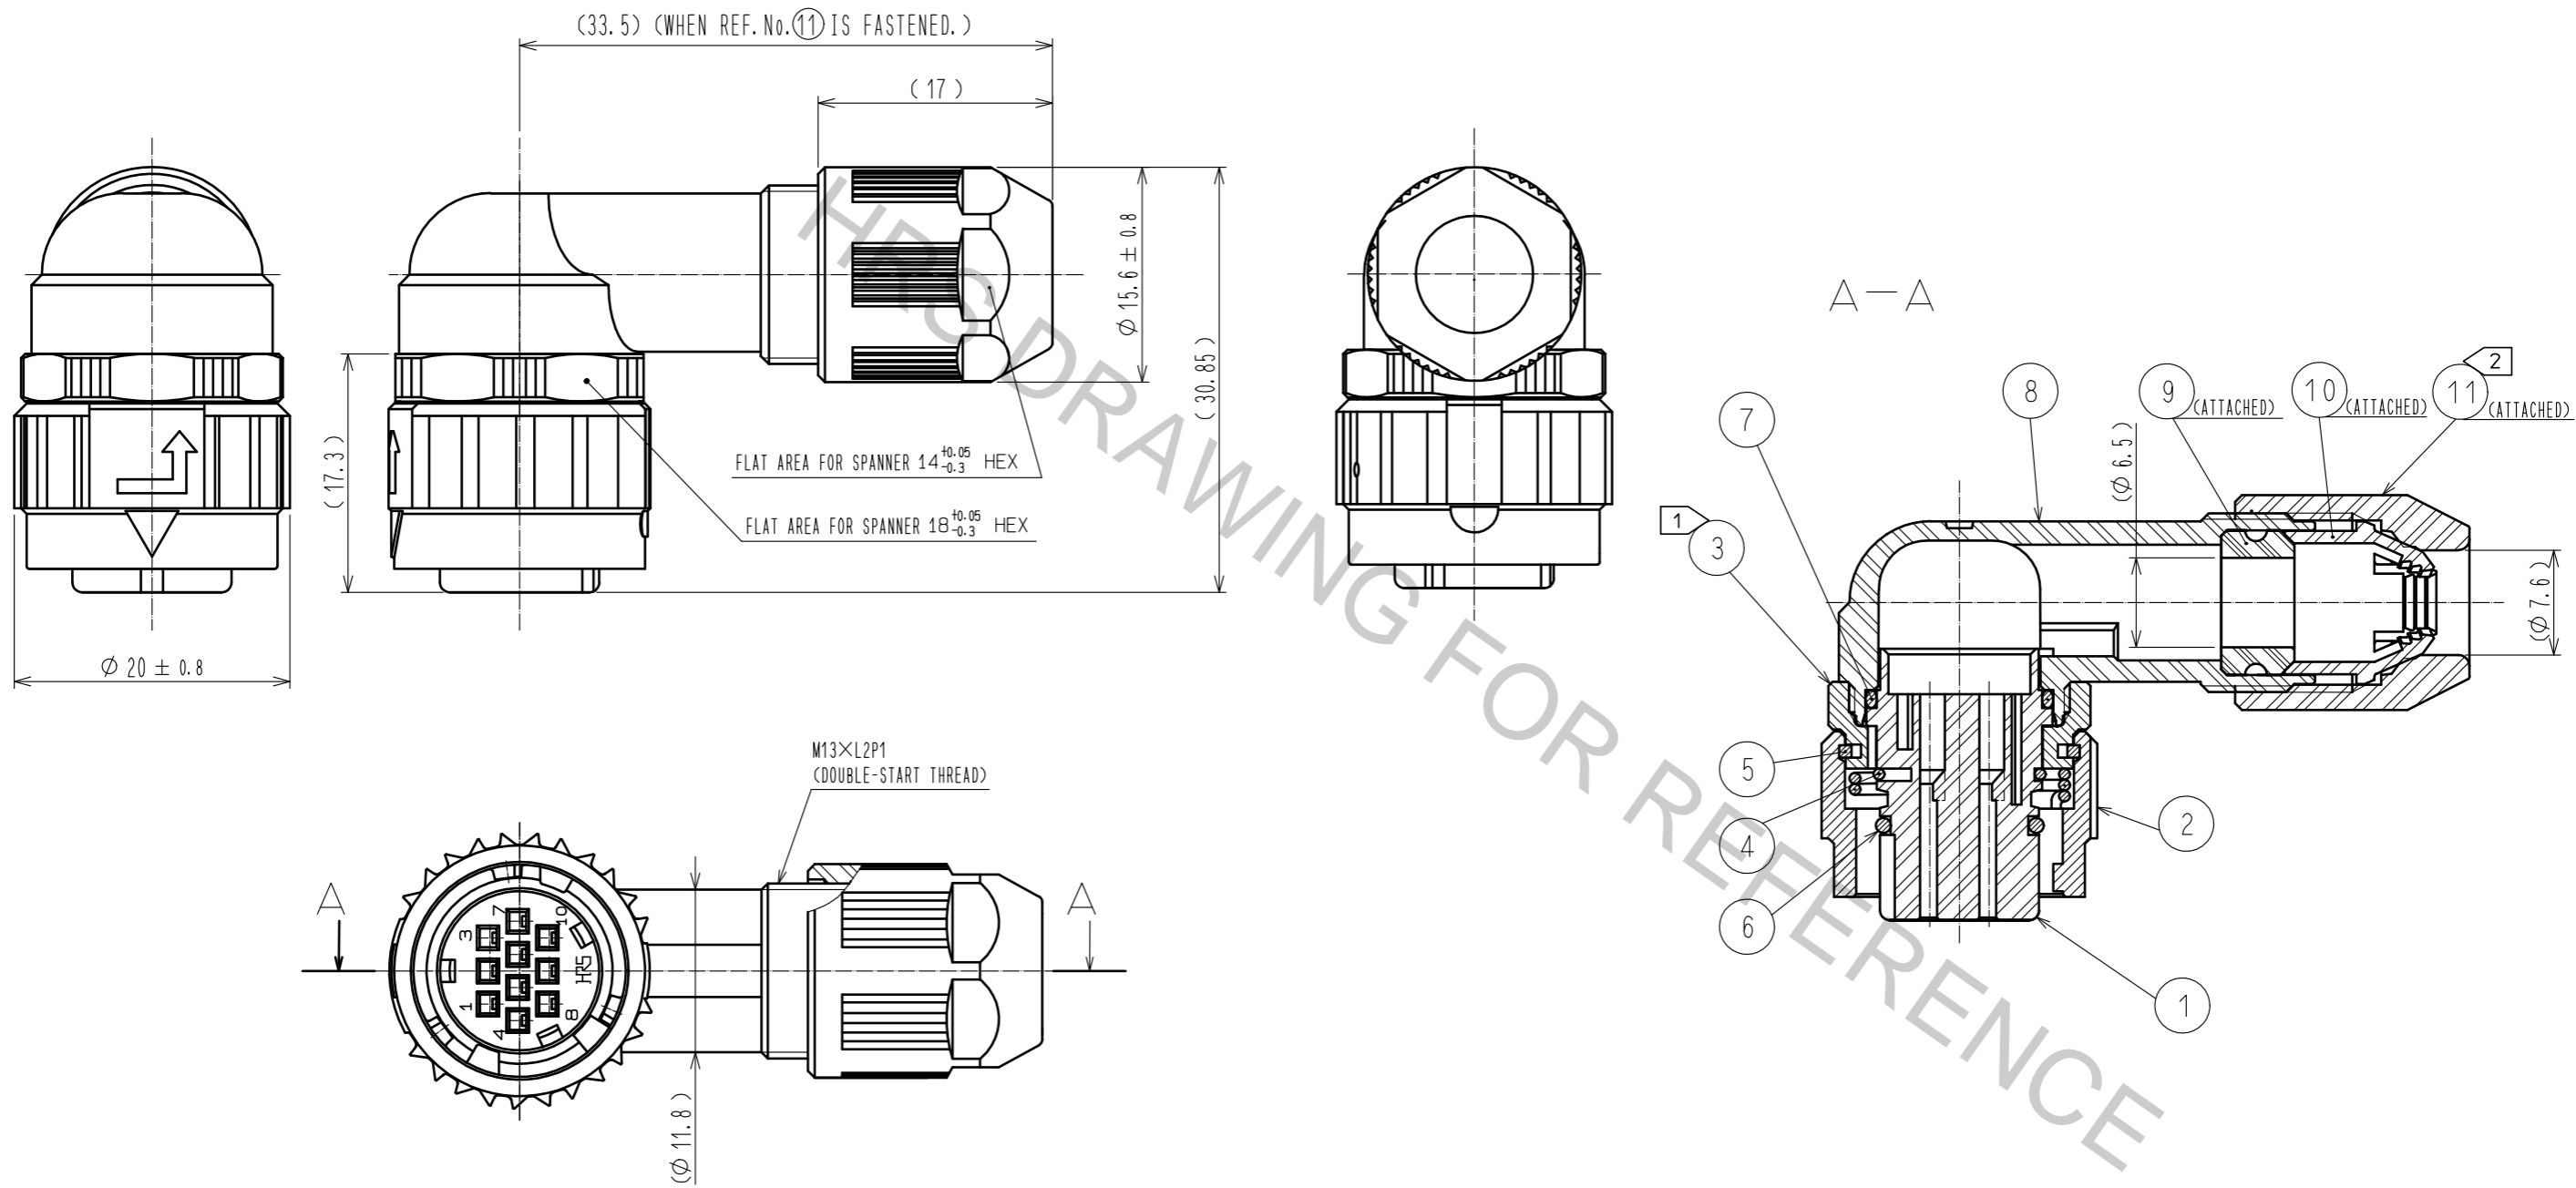

- NOTES
- ① THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ③: 0.9 TO 1 N·m.
 THE RECOMMENDED ADHESIVE OF REF. NO. ③: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 - ② THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑪: 0.9 TO 1 N·m.
 THE RECOMMENDED ADHESIVE AND PRIMER OF REF. NO. ⑪: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 - ③ ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ③, ⑧, AND ⑪.
 - ④ APPLICABLE CRIMP CONTACT: HR34B-SC1-211(CL134-0050-4)
 APPLICABLE WIRE: AWG#20 TO AWG#24(COVERED WIRE MAX. OUTSIDE DIA. $\phi 1.7$)
 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL): RP6-SC-TP(CL150-0039-0)
 - ⑤ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
6	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)		11	POLYPHENYLENE SULFIDE	(BLACK)	UL94V-0
5	PHOSPHOR BRONZE	NICKEL PLATING		10	POLYAMIDE	(WHITE)	UL94V-0
4	STAINLESS STEEL			9	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
3	ZINC ALLOY	NICKEL PLATING		8	POLYAMIDE	(BLACK)	UL94V-0
2	ZINC ALLOY	NICKEL PLATING		7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
1	POLYPHENYLENE SULFIDE	(BLACK)	UL94V-0				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2:1	△				
APPROVED			HY. KOBAYASHI	18.02.26	DRAWING NO. EDC-117754-31-00	
CHECKED			HY. KOBAYASHI	18.02.26	PART NO. HR08D-12WLP-10SC(31)	
DESIGNED			DS. MATSUNE	18.02.24	CODE NO. CL108-0270-4-31	
DRAWN			AI. NISHIYAMA	18.02.16		