

SUMMARY

Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	0A
Termination type	Female solder
IP rating	50
Cable Ø	2.50 - 2.80 mm
Matching parts	FFA.0A.250.NTAC29
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PCA*: Straight receptacle with cable collet
Keying	
Housing Material	Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces
Cable Fixing	∅ 2.5 - 2.8 mm
Variant	

Performance

Configuration	0.25 : 1 Coax (50 Ohm)
Insulator	
Rated Current	

Specifications


Contact Type:	Coaxial 50 Ohm (Solder)
Max. Matings:	1000

Others

IP Rating:	50
------------	----

DRAWINGS

Draws

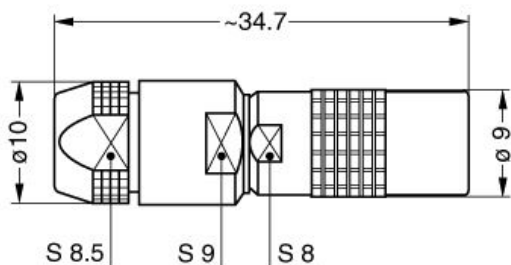

Dimensions

	A	B	L	S1	S2	S3
mm.	9	10	35	8	8.5	9
in.	0,35	0,39	1,38	0,31	0,33	0,35

RECOMMENDED BY LEMO

Tools

None

Cables