



Smart Technology. Delivered.

698-960 MHz/1710-2700 MHz LTE Vertical Standard Directional Panel Antenna PAV692780



PAV692780-30NF



PAV692780-FNF

LTE MUTI-BAND DIRECTIONAL PANEL ANTENNA

The PAV692780 is a multiband, high gain directional panel antenna with vertical polarization that covers the 698-960 MHz/1710-2700 MHz, LTE700/Cellular/PCS/AWS/ MDS and global GSM900/GSM1800/UMTS/LTE2600 bands. The radiation patterns are uniform and symmetrical, providing high level signal density into defined coverage zones. This antenna will greatly enhance the performance of LTE systems and is ideal for indoor or outdoor applications. The antenna includes a wall mounting bracket, anchors and bolts. The antenna can also be mast mounted with bracket adaptor and clamps.

FEATURES



- Performance optimized using Laird proprietary RF optimization tools.
- Can be mounted directly to wall with standard bracket or mast mounted with bracket adaptor & clamps.
- UV stable, aesthetically compact radome with excellent flame rating.
- Multiple connector and coax options available including fixed Type N(F) and integrated coax pigtail with Type N(F).
- Conformance to RoHS.
- IP67 rated for dust, dirt & water ingress.


APPLICATIONS

- In-building or Outdoor Wireless Networks
- Wireless Terminal, Point-of-Sale, and Machine-to-Machine
- Automatic meter reading
- Commercial and industrial security

SPECIFICATIONS

PARAMETER	SPECIFICATION	
	MODEL PAV692780	
Frequency Bands, MHz	698-960 MHz	1710-2700 MHz
Peak Gain, dBi (Typ)	6.8	7.6
Peak Gain, dBi (Max)	7.6	8.1
VSWR, Typ	<1.8:1	<1.8:1
VSWR, Max	<2.0:1	<2.0:1
Azimuth 3 dB Beamwidth	75°	63°
Elevation 3 dB Beamwidth	64°	51°
Front-to-Back Ratio	10 dB	25 dB
Nominal Impedance	50Ω	
Polarization	Vertical	
Max Power (Ambient 25°C)	50 Watts	
Antenna Dimension (H x Dia)	249.4 x 248.6 x 61.3 mm (9.82" x 9.8" x 2.41")	
Weight	0.62 kg (1.35 lbs)	
Antenna Color	White	
Radome	Luran ASA, UV Stable, UL 94-HB Material	
Wind Operational	160 km/h (100 mph)	
Wind Survival	220 km/h (136 mph)	
Operating Temperature	-30°C to +70°C	
Storage Temperature	-40°C to +85°C	
Ingression Protection	IP67	
Material Substance Compliance	RoHS	
Connector(s)	PAV692780-30NF (pigtail w/Type N(F))	PAV692780-FNF (fixed Type N (F))

MOUNTING OPTIONS

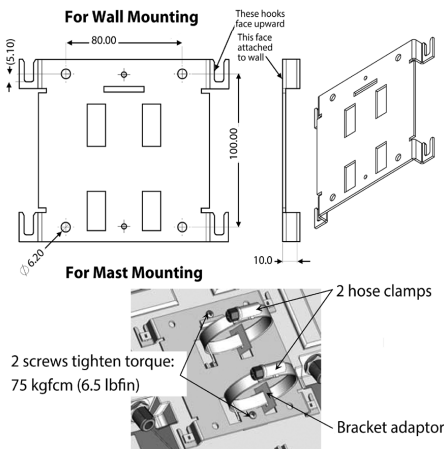

Americas: +1.847 839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective by reason of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.






Smart Technology. Delivered.


698-960 MHz/1710-2700 MHz LTE Vertical Standard Directional Panel Antenna PAV692780

- S1 fixed
- S5 pigtail


Radiation Pattern at 698 MHz

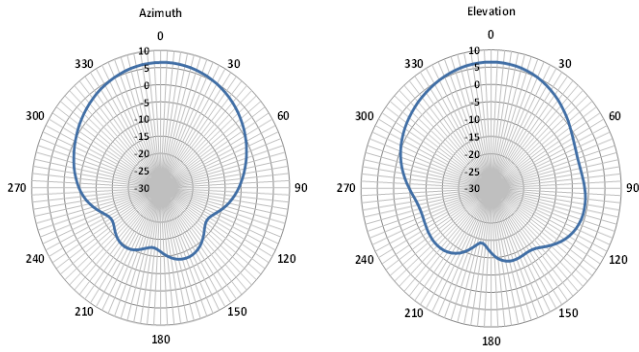


Radiation Pattern at 824 MHz

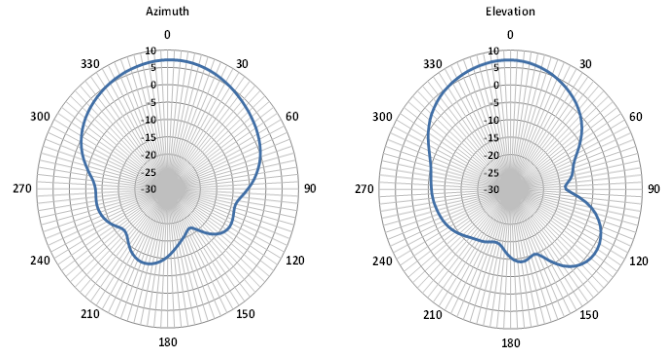


Radiation Pattern at 960 MHz

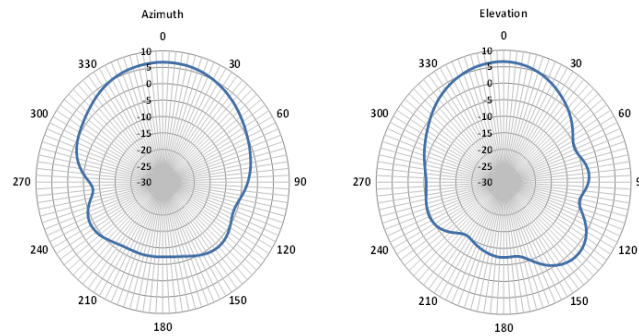


Radiation Pattern at 1710 MHz

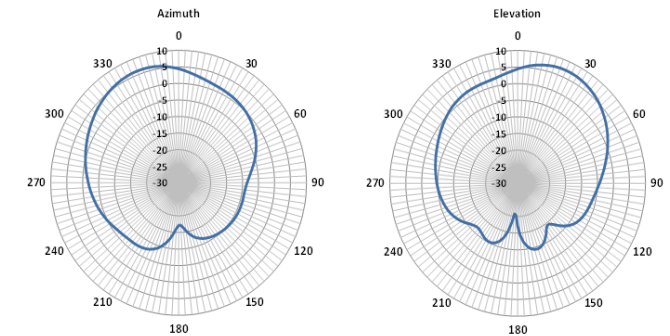

Radiation Pattern at 1880 MHz

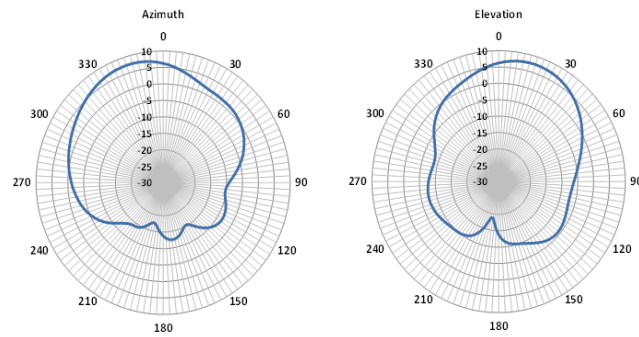


Radiation Pattern at 2110 MHz

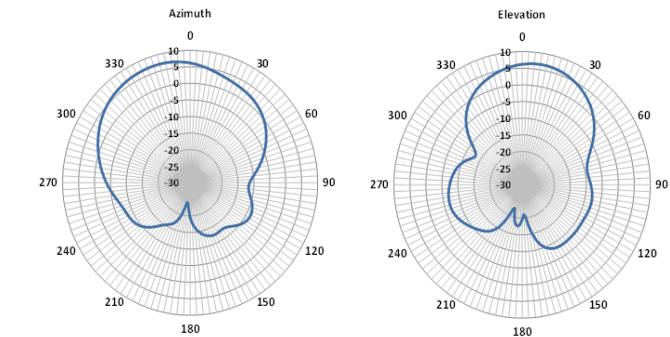


— S1 fixed
 — S5 pigtail


Radiation Pattern at 2305 MHz

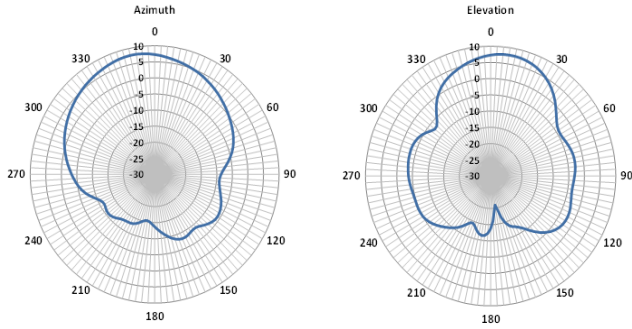

Radiation Pattern at 2412 MHz

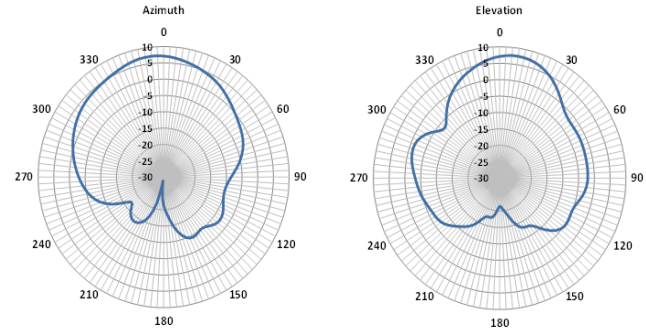

Radiation Pattern at 2700 MHz

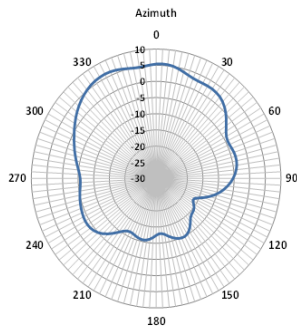

ANT-DS-PAV692780_102315

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird, Laird Technologies, Inc or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2013 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.