

## Crimp contact - CK4,0-ED-1,50ST AG - 1663239


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Turned 4.0 crimp contact, individual male contact, core diameter 1.5 mm<sup>2</sup>, silver-plated

RoHS

### Key Commercial Data

|                        |   |
|------------------------|---|
| Packing unit           | 25 STK  |
| Minimum order quantity | 25 STK  |
| GTIN                   | <br>4 017918 123048 |
| GTIN                   | 4017918123048   |

### Technical data

#### Electrical characteristics

|      |                    |
|------|--------------------|
| Note | For HC-M-3 modules |
|------|--------------------|

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

#### Mechanical characteristics

|   |   |
|---|---|
| Conductor cross section                 | 1.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Connection cross section AWG            | 16  |
| Stripping length of the individual wire | 9 mm  |
| Contact diameter                        | 4 mm  |
| Insertion/withdrawal cycles             | ≥ 500                                       |

#### General

|                   |                         |
|-------------------|-------------------------|
| Type              | Individual male contact |
| Series            | HC-M-03                 |
| Connection method | Crimp connection        |
| Contact type      | turned                  |

#### Material data

# Crimp contact - CK4,0-ED-1,50ST AG - 1663239

## Technical data

### Material data


|                          |               |
|--------------------------|---------------|
| Contact material         | Copper alloy  |
| Contact surface material | silver-plated |

### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Dimensional drawing

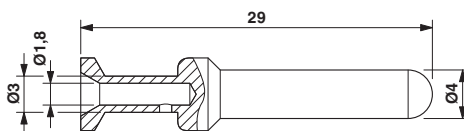

## Approvals

### Approvals

Approvals

EAC

Ex Approvals

### Approval details

|     |  |                          |
|-----|--|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.01102 |
|-----|--|--------------------------|

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
 Flachsmarktstr. 8  
 32825 Blomberg  
 Germany  
 Tel. +49 5235 300  
 Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>