




FCIconnect.com

Copyright FCI

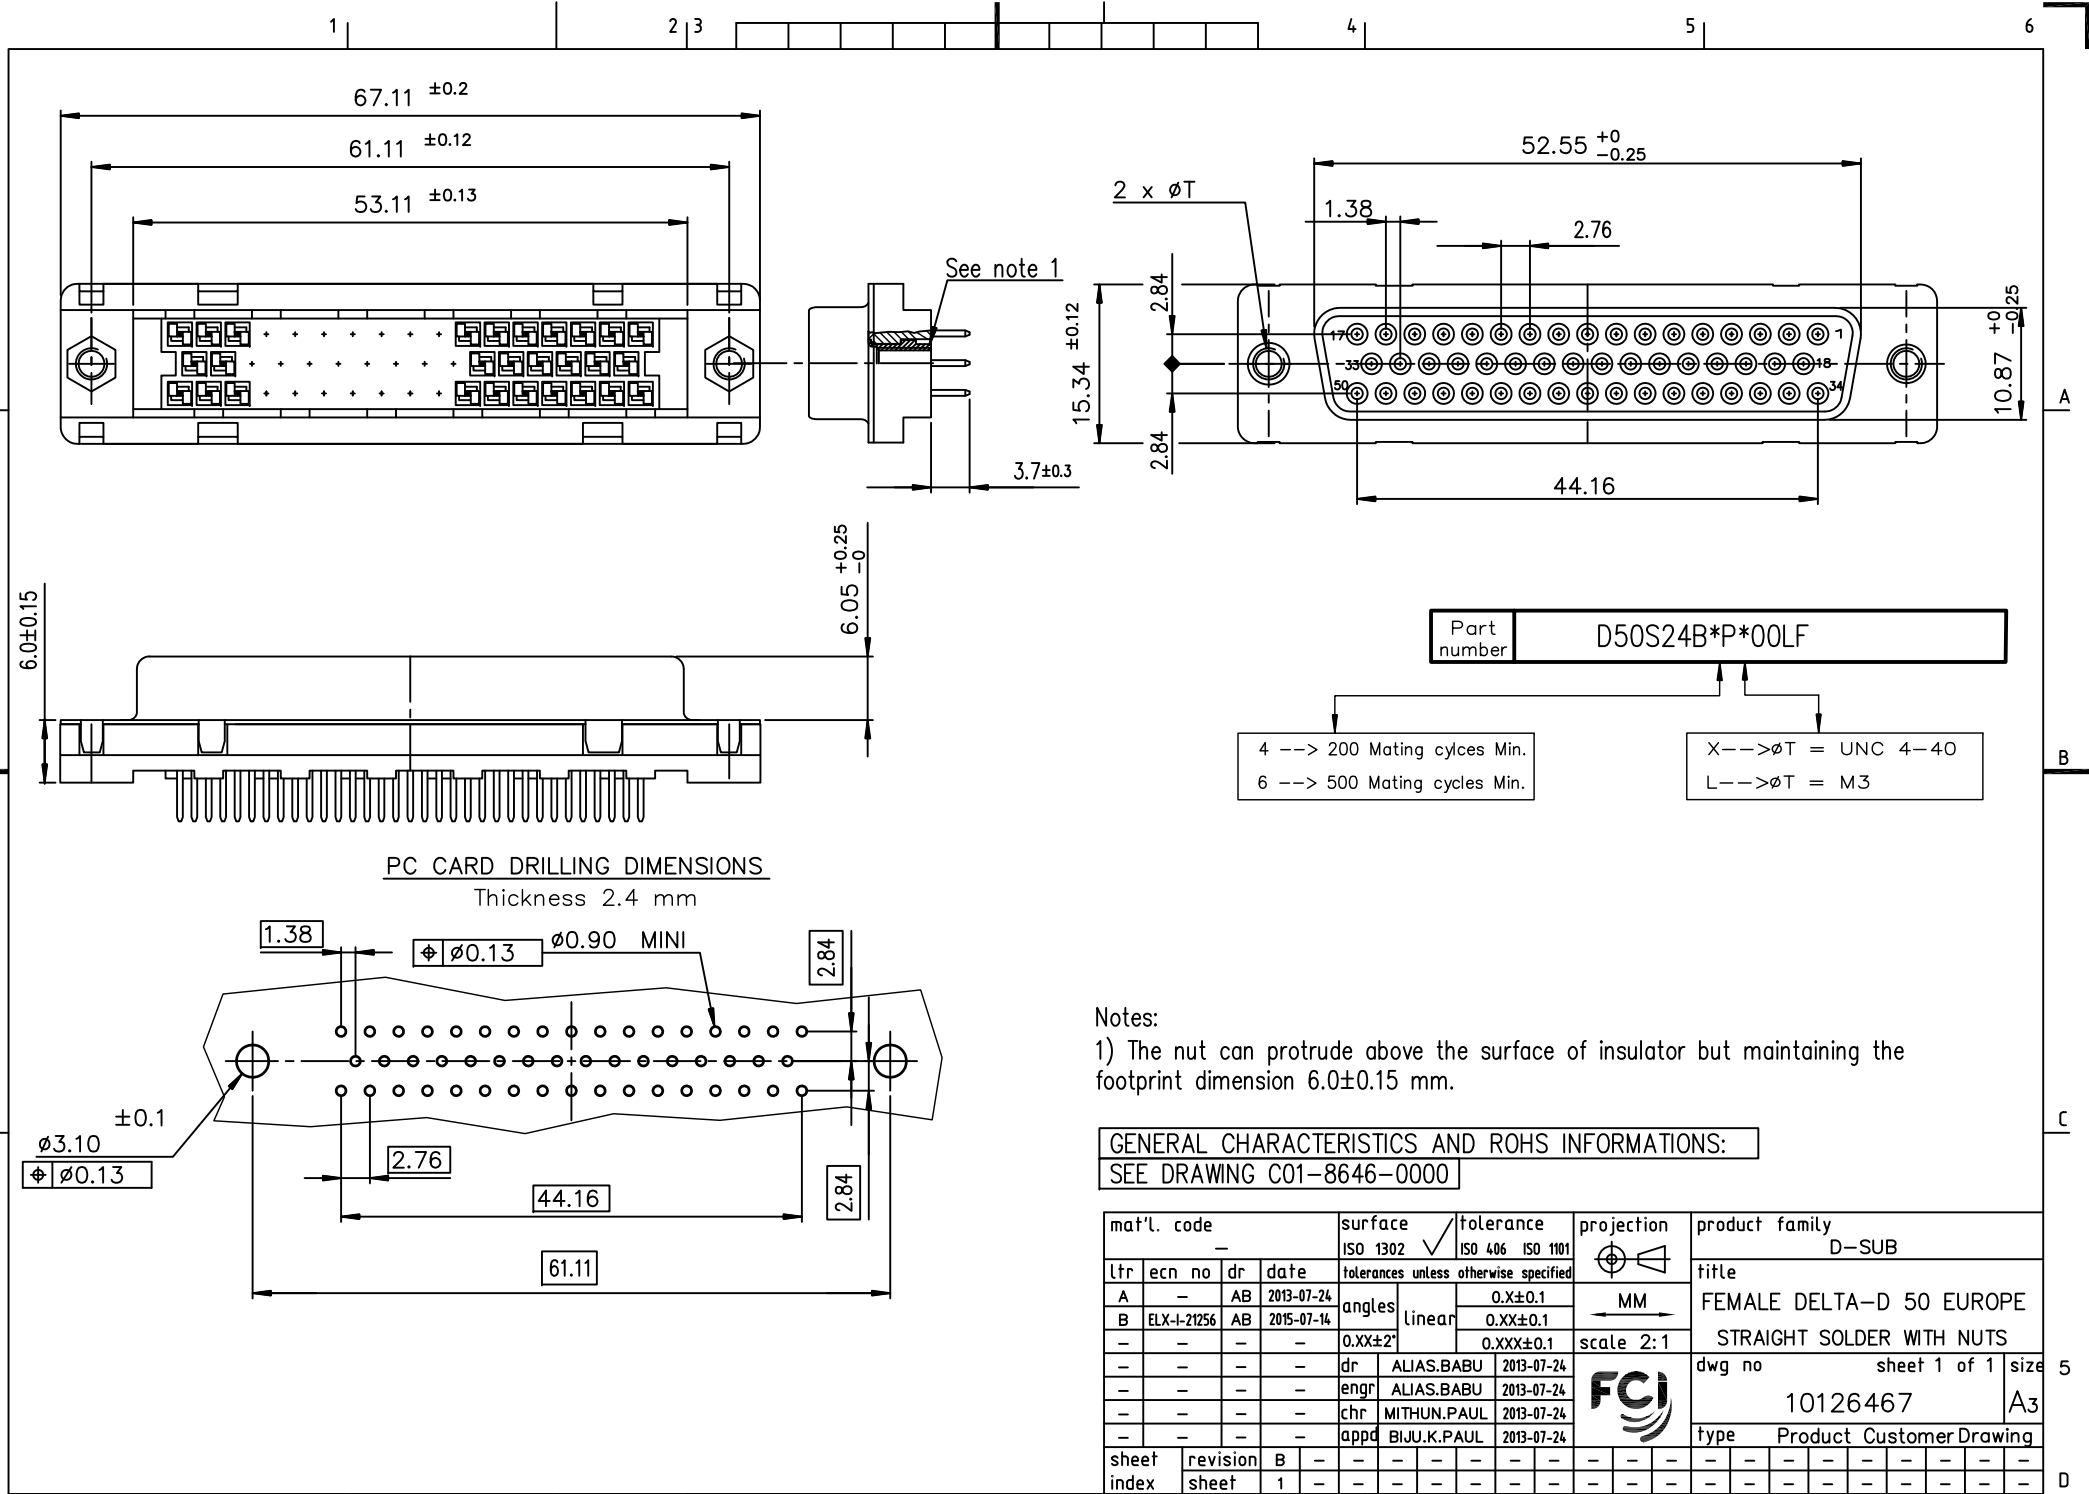

**PC CARD DRILLING DIMENSIONS**  
Thickness 2.4 mm

Part number **D50S24B\*P\*00LF**

4 ---> 200 Mating cycles Min.  
6 ---&; 500 Mating cycles Min.

X--->ØT = UNC 4-40  
L--->ØT = M3

**Notes:**

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

**GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:**  
SEE DRAWING C01-8646-0000

mat'l. code		surface		tolerance		projection		product family		
-		ISO 1302 ✓		ISO 406 ISO 1101				D-SUB		
ltr		ecn no	dr	date	tolerances unless otherwise specified		title		sheet 1 of 1 size	
A	-	AB	2013-07-24	2013-07-24	angles	linear	MM	FEMALE DELTA-D 50 EUROPE		5
B	ELX-I-21256	AB	2015-07-14	2015-07-14			scale 2:1	STRAIGHT SOLDER WITH NUTS		
-		-	-	-	0.XX±0.1	0.XX±0.1		dwg no		
-		-	-	-	0.XX±2'	0.XXX±0.1		10126467		A3
-		-	-	-	dr	ALIAS.BABU	2013-07-24	type		Product Customer Drawing
-		-	-	-	enr	ALIAS.BABU	2013-07-24			
-		-	-	-	chr	MITHUN.PAUL	2013-07-24			
-		-	-	-	app	BIJU.K.PAUL	2013-07-24			
sheet index	revision	B	-	-	-	-	-	-	-	-
sheet	1	-	-	-	-	-	-	-	-	-