


## MICROSERIES MRZ 48Vuc 1CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com

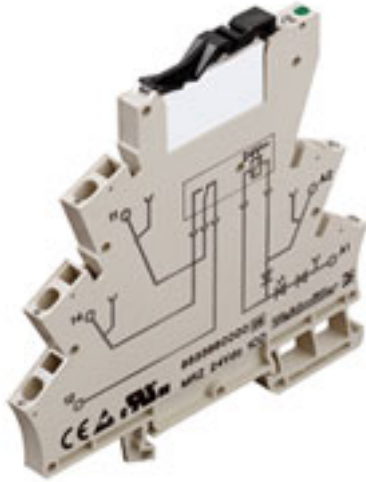

Relays of the MICROSERIES are used for isolating and coupling digital signals.

They are characterised by the following features:

- modular width 6.1 mm
- Pluggable relay
- Pluggable cross-connection for four voltages in input and output circuits,
- innovative retention and ejection aid,
- LED operating indicator, reverse polarity protection diode, free-wheeling diode

### General ordering data

Order No.	<a href="#">8556110000</a>
Part designation	MRZ 48Vuc 1CO
Version	MICROSERIES, Relays, No. of contacts: 1, CO contact, Rated control voltage: 48 V UC ±10 %, Tension clamp connection
GTIN (EAN)	4032248195336
Qty.	10 pc(s).

## MICROSERIES MRZ 48Vuc 1CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com

## Technical data

### Dimensions

Length	94 mm	Width	6.1 mm
Height	91 mm		

### Temperature

Ambient temperature (operational)	-25 °C...+50 °C	Storage temperature	-40 °C...+60 °C
-----------------------------------	-----------------	---------------------	-----------------

### Input

Rated voltage	300 V	Rated control voltage	48 V UC ±10 %
Response / drop-out voltage AC coil	29 V / 11 V	Pull-in (sparkover) / drop-out voltage DC coil	29 V / 11 V
Rated current AC	5 mA	Rated current DC	4 mA
Pull-in / drop-out current, AC coil	2.2 mA / 1.3 mA	Pull-in / drop-out current, DC coil	2,2 mA / 1,3 mA
Power rating	190 mW	Status indicator	Green LED

### Output

Continuous current	6 A	Max. switching current	6 A
Max. switching frequency at rated load	0.1 Hz	Switch-off delay	7.5 ms
Switch-on delay	9.3 ms	Switching voltage AC, max.	250 V
making current	6 A	max. switching capacity	1500 VA
min. switching capacity	12 V / 100 mA		

### Contact data

Contact design	CO contact	No. of contacts	1
Contact material	AgSnO	Mechanical service life	20 x 10 <sup>6</sup> switching cycles

### Rated data

Conductor connection system	Tension clamp connection	DIN Rail compatibility	TS 35
Humidity	40°C / 93% rel. humidity, no condensation		

### Insulation coordination (EN 50 178)

Clearance and creepage distances for control/load side	≥ 5.5 mm	Dielectric strength to mounting rail	4 kV <sub>eff</sub> / 1 min.
Impulse withstand voltage	6 kV (1.2/50 µs)	Overvoltage category	III
Pollution severity	2	Protection class	IP 20
Protective separation acc. to VDE 0106 part 101	Yes	Rated voltage	300 V

### Other technical data

Bridge rectifier	Yes	Free-wheel diode	Yes
Reverse polarity protection	Available	Status indicator	Green LED
Version	Relay coupler		

### Approvals

Approvals institutes	CSA; CULUS; CURUS; GOSTME25; CE
----------------------	------------------------------------

**Datasheet****MICROSERIES  
MRZ 48Vuc 1CO**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

**Technical data****Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01

**Notes**

Note, technical data                      Cross-connectors and markers - refer to MICROSERIES accessories

**MICROSERIES  
MRZ 48Vuc 1CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com

**Drawings**

**Electric symbol**

