



A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

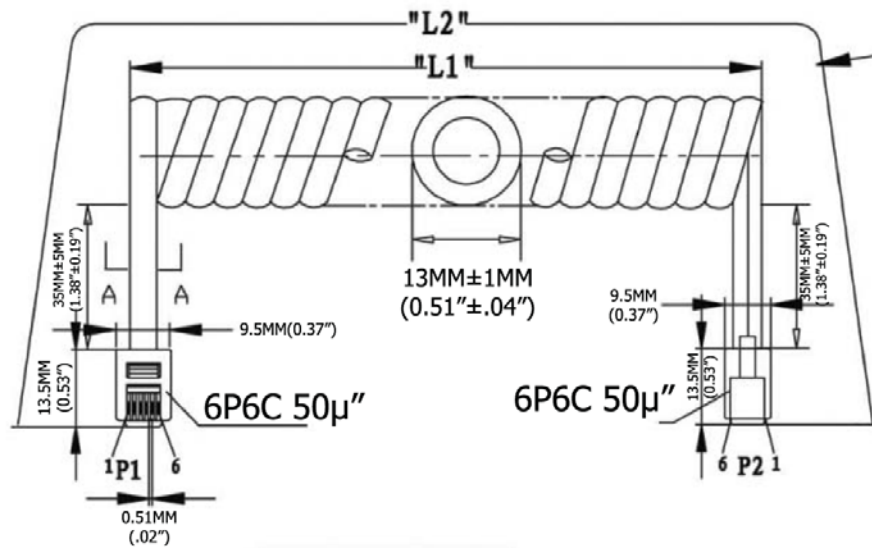

Extended length is with 500g of force



SEC: A-A

P1	P2
1	6
2	5
3	4
4	3
5	2
6	1

- Material:**
- Plug Housing: Polycarbonate, clear
 - Plug Terminal: 0.36" [0.14MM] Thick Phosphor Bronze
 - Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm [0.00100] thick nickel underplate
 - Conductor(X6C): 26AWG (0.12X12) Bare Copper
 - Insulation(X6C): PP6331 ID 0.95-1.0
 - Jacke: PVC No UL 80 P
 - Package: Individual PE Bag

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	21.5 Inches
1,524.0MM-1,752.6MM	546.1MM

Scale	1:1					Name	Item No. AT-C-26-6/6/S-5
TOLERANCE				Drawn	11.02.11	Chappell	
X.X	±0.40			Approved			Title NON-UL 26AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Single Plug, 50µ" of contact plating, SILVER
X.XX	±0.25						
X.XXX	±0.15						Drawing No.
Angle	±3°						rev00
							Replace
							Sheet

