


## ROHS PART NUMBERS

Flash Au	0.76 $\mu$ Au
D50S90C4G*00LF	D50S90C6G*00LF


L	---	$\phi T=M3$
X	---	$\phi T=UNC\ 4-40$

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

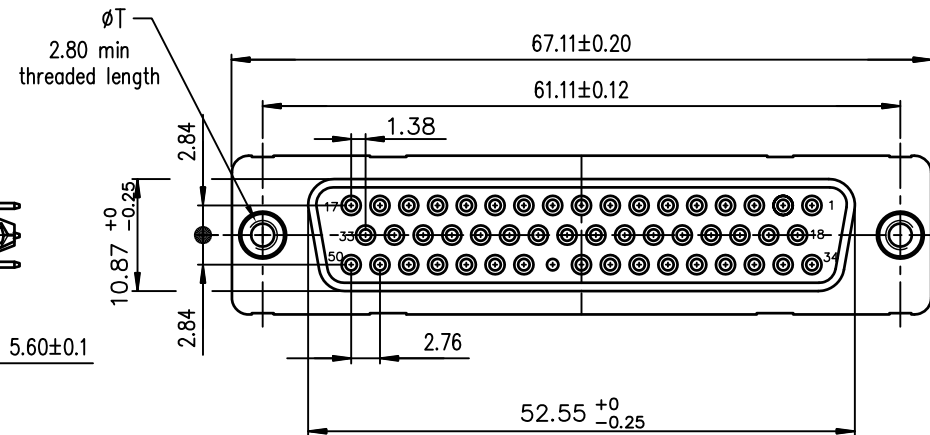

PC board drilling dimensions  
(after plating – thickness: 1.60 to 3.20 mm)

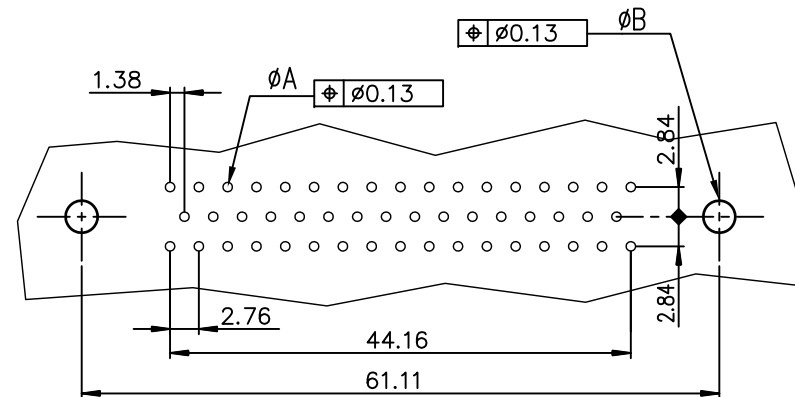

mat'l. code				surface	tolerance	projection	product family		
				ISO 1302	ISO 406 ISO 1101		D-SUB		
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title		
F	ELX-I-21654	AB	2015-10-26	angles	linear		FEMALE DD LOW PROFILE		
G	ELX-I-24020	AAB	2016-06-06	0°±2°			STRAIGHT PRESS-FIT		
				dr	PESSON	1995-10-03	Amphenol FCi	dwg no	sheet 1 of 1
				engr	MITHUN PAUL	2016-06-06		C01-8646-0376	A3
				chr	ATHUL A.B	2016-06-06		type	
				appd	BIJU K PAUL	2016-06-06		Product Customer Drawing	
sheet index	revision	G							
	sheet	1							