

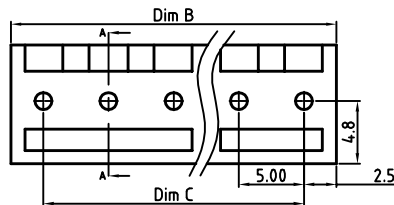
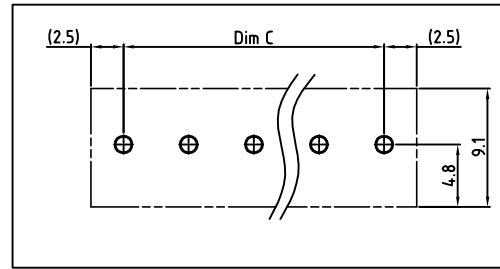


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



SECTION A-A

Material

- Insulator (Body): Thermoplastic (UL94V-0)
- Pin: Brass, Tin plated

Electrical

- Voltage rating: 300VAC
- Current rating: 15A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec

RoHS Compliant

PART NUMBER:

OSTKGXX0080

No. of Poles
02: 2 Poles
:
:
24: 24 Poles

COLOR
0: Black
5: Green
6: Blue
8: Grey (Standard)

Poles	2	3	4	5	6	7	8	9	10	11	12	13
Dim A	7.80	12.80	17.80	22.80	27.80	32.80	37.80	42.80	47.80	52.80	57.80	62.80
Dim B	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00
Dim C	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
TOL	±0.15						±0.20					
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim A	67.80	72.80	77.80	82.80	87.80	92.80	97.80	102.80	107.80	112.80	117.80	
Dim B	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00	
Dim C	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	
TOL	±0.30						0.40					

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

OST ON-SHORE TECHNOLOGY, INC.					
TITLE	OSTKG - 5.0mm shrouded header				
PART NO.	OSTKGXX0080				
DWG NO.	OSTKGXX0080.DWG				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Tason	Tason		X. ±0.5
		2007.09.17	2007.09.17		X.X ±0.3
					X.XX ±0.1
					X° ±1°
				SHEET: 01/01	REV: A