MADE IN AMERICAN PROJECTION

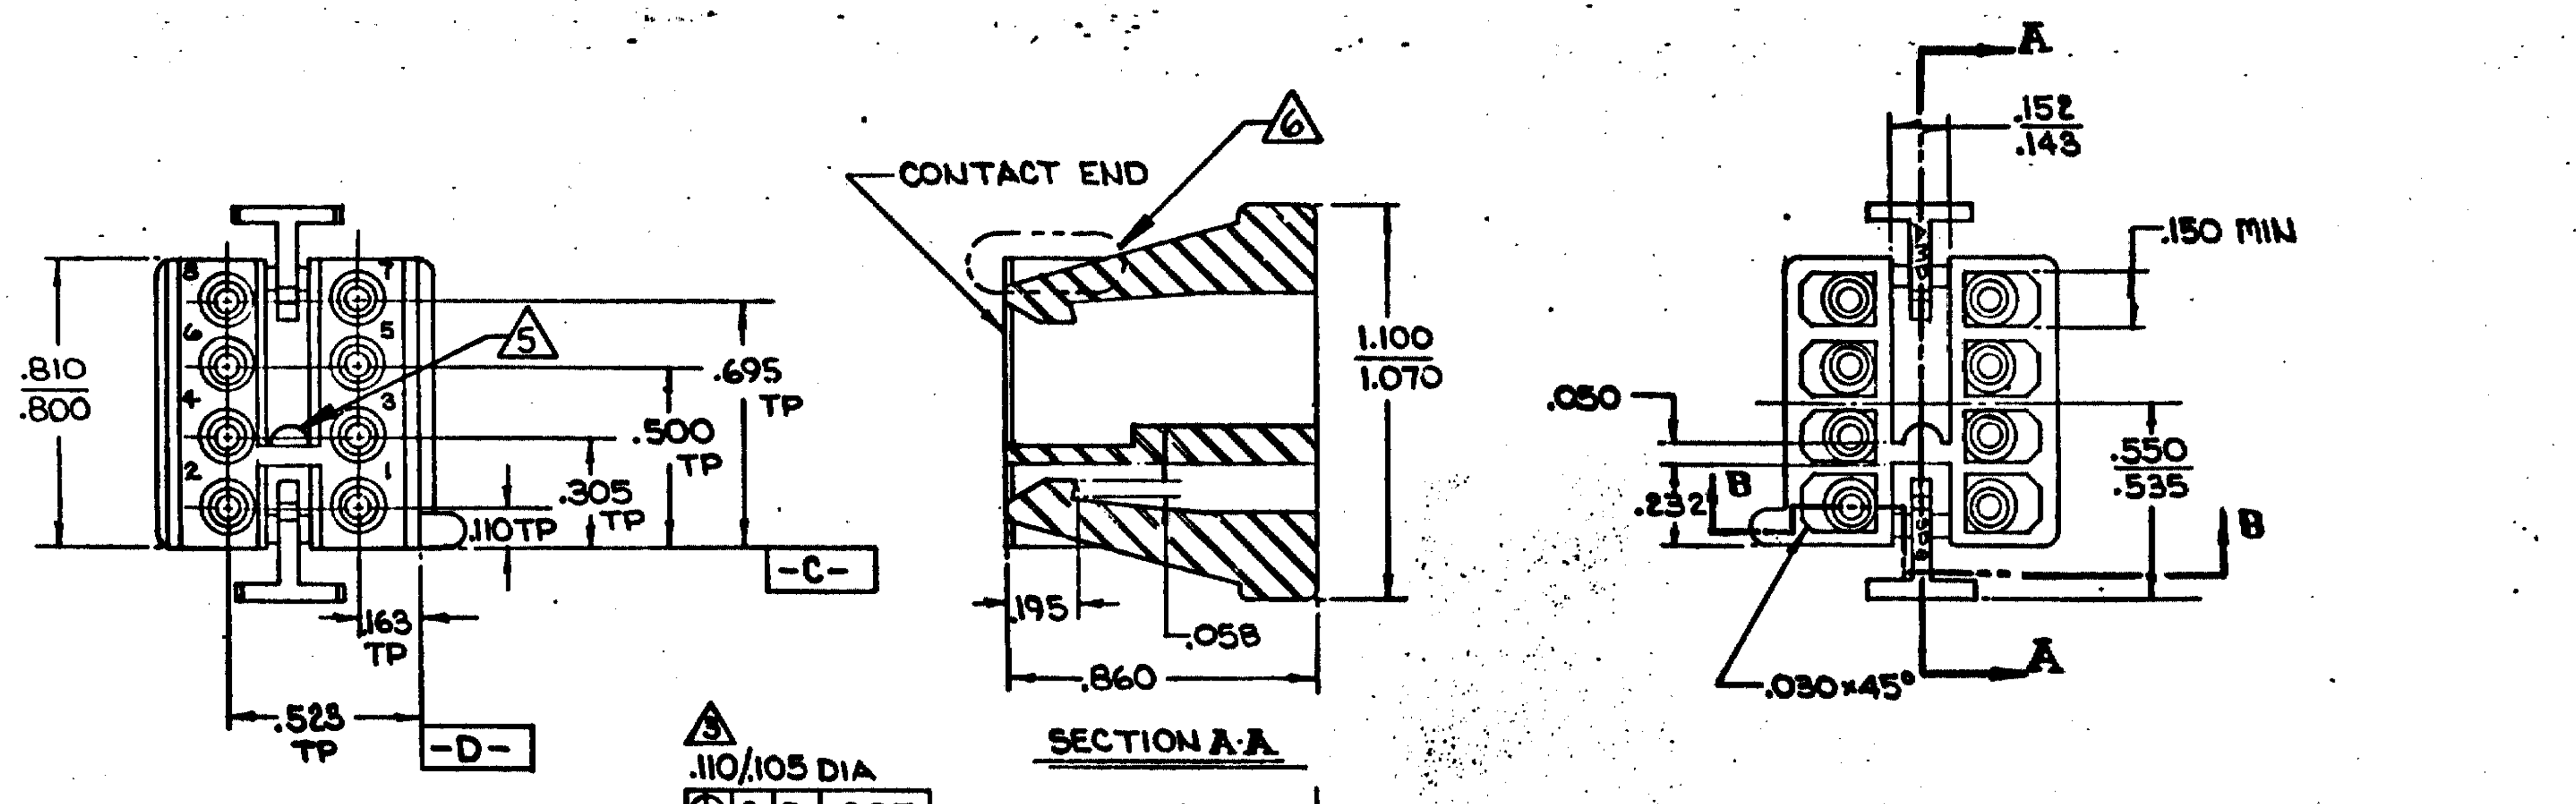

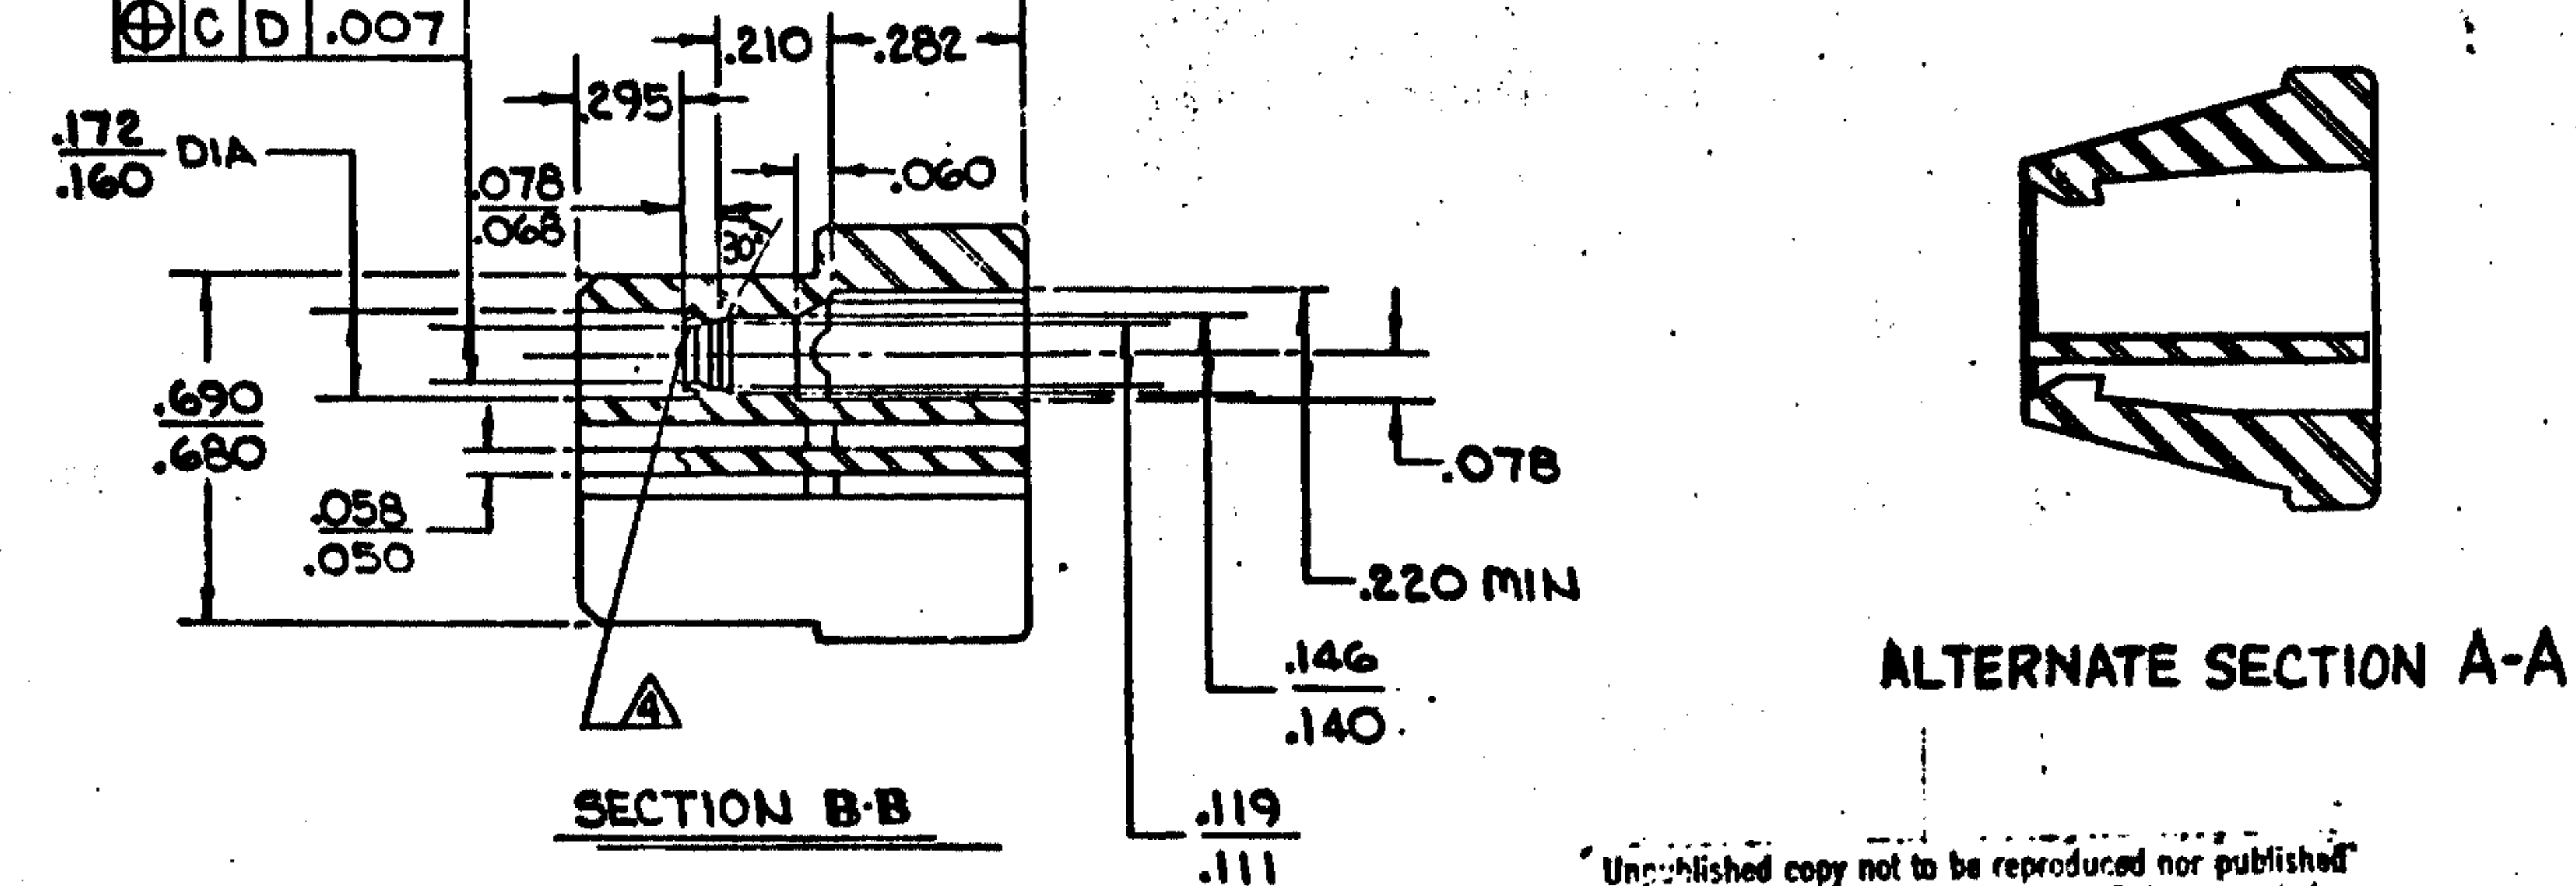

NOTES:

1. ACCEPTS TERMINALS 60949, 60950, 60951, 60994, 60995, 60996
2. MATES WITH 480373
3. A .105 DIA PIN MUST ENTER CAVITY WITH A MAX FORCE OF 5 OUNCES
4. .005 MAX FLASH PERMITTED
5. OPTIONAL FEATURE - SEE ALTERNATE SECTION A-A.
6. OPTIONAL CONFIGURATION - SEE ALTERNATE SECTION A-A.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

"Unpublished copy not to be reproduced nor published without written permission of AMP Incorporated."

PART NUMBER	MATERIAL	COLOR
1-480374-0	NYLON	NATURAL
~~1-480374-1~~ (7)	NYLON	BLACK

REV	DESCRIPTION	DR	CHK	DATE
G1	ECO-09-025699	KK	HMR	JAN10
G	REV PER CM-1015	PKC	TB	10-14-87
F1	RESTORATION	KS	SJ	5-6-85
F	REV, M-7432	[illegible]	SJ	[illegible]
E	[illegible]	[illegible]		[illegible]
D	[illegible]	[illegible]		[illegible]
C	[illegible]	[illegible]		[illegible]

REQUIRED PER ASSEMBLY

DWG SIZE	NUMBER	NAME	REMARKS	ITEM NO

© 1966 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY

DR 6-6-72 IRShaffner
CHK 6-12-72 W. T. [illegible]
DE 6-12-72 [illegible]
APP [illegible]

MATERIAL AND FINISH: SEE CHART

WIRE - RANGE - INSULATION: -//- | -//-

TOLERANCE EXCEPT AS NOTED ±.015 ±1° 0'

SCALE 2×1

AMP INCORPORATED
HARRISBURG, PENNA

CLASS .086 SOCKET HOUSING
TYPE -//-
LOC CM B
NO 480374
REV G1

NAME 8 CIRCUIT DUAL-M-LOK PLUG