

**Ratings**

Voltage: 300 V  
 Temperature: 80 °C  
 Flammability: VW-1, FT1

**Conductor**

Conductor count: 2  
 Gauge: 22 AWG, 0.35 mm<sup>2</sup>  
 Material: tinned copper strands  
 Stranding:  $\varnothing 0.16 \times 17$   
 Resistance at 20 °C: 60 ohm/km maximum

**Insulator**

Material: SRPVC, 80 °C  
 Color: black, red  
 Outer diameter:  $\varnothing 1.35 \pm 0.10$  mm  
 Thickness: 0.23 mm minimum average  
 Style: UL 1061

**Outer jacket**

Material: PVC, 80 °C  
 Color: white  
 Diameter:  $\varnothing 4.3 \pm 0.20$  mm  
 Thickness: 0.76 mm minimum average


**Wire marking:** E339579 UL AWM STYLE 2464 22AWG 80°C  
 300V VW-1 - - - cUL AWM I A 80°C 300V FT1 TENSILITY

**Tests**

Tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113 ± 2 °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Flexibility: no observed cracking  
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation  
 Deformation: 121 ± 1 °C /1hour, ≤ 50 %  
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking  
 Dielectric: 2000 Vac for 1 minute without breakdown

**Use:**

Internal wiring or external interconnection of electronic equipment

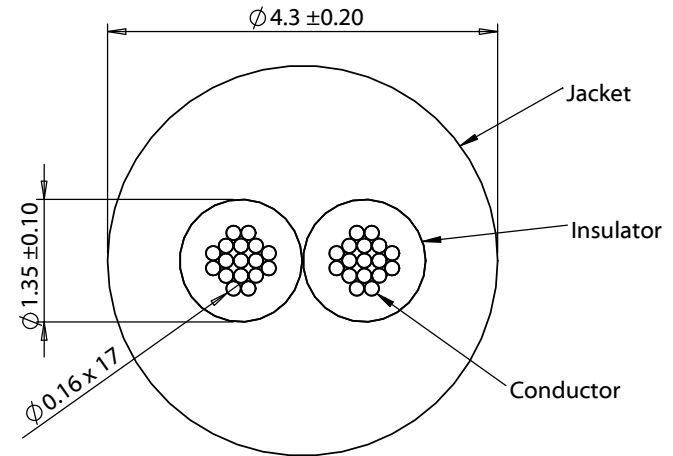

REVISION	DATE	DESCRIPTION
A	1/22/2016	Initial release

PREPARED:  
 VERIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 TOLERANCES:  
 X: ± 0.5 mm  
 X.X: ± 0.3 mm  
 X.XX: ± 0.05 mm

NOTES  
 RoHS and REACH compliant  
 Function test: no open, no short circuit, no intermittent  
 Meets UL appliance wiring standard 758  
 DESCRIPTION:  
 Wire, 2C TS, 22 AWG, UL2464, 300V, 80C, 4.3 mm, VW-1, PVC, white

**TENSILITY**  
 20802 Sockeye Place #130  
 Bend, OR 97701 USA  
 tel 541.323.3228 fax 541.323.4202  
 800 877.670.7118 www.tensility.com

SIZE A	PART NUMBER 30-00690
SCALE: 12:1	SHEET 1 OF 1