


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

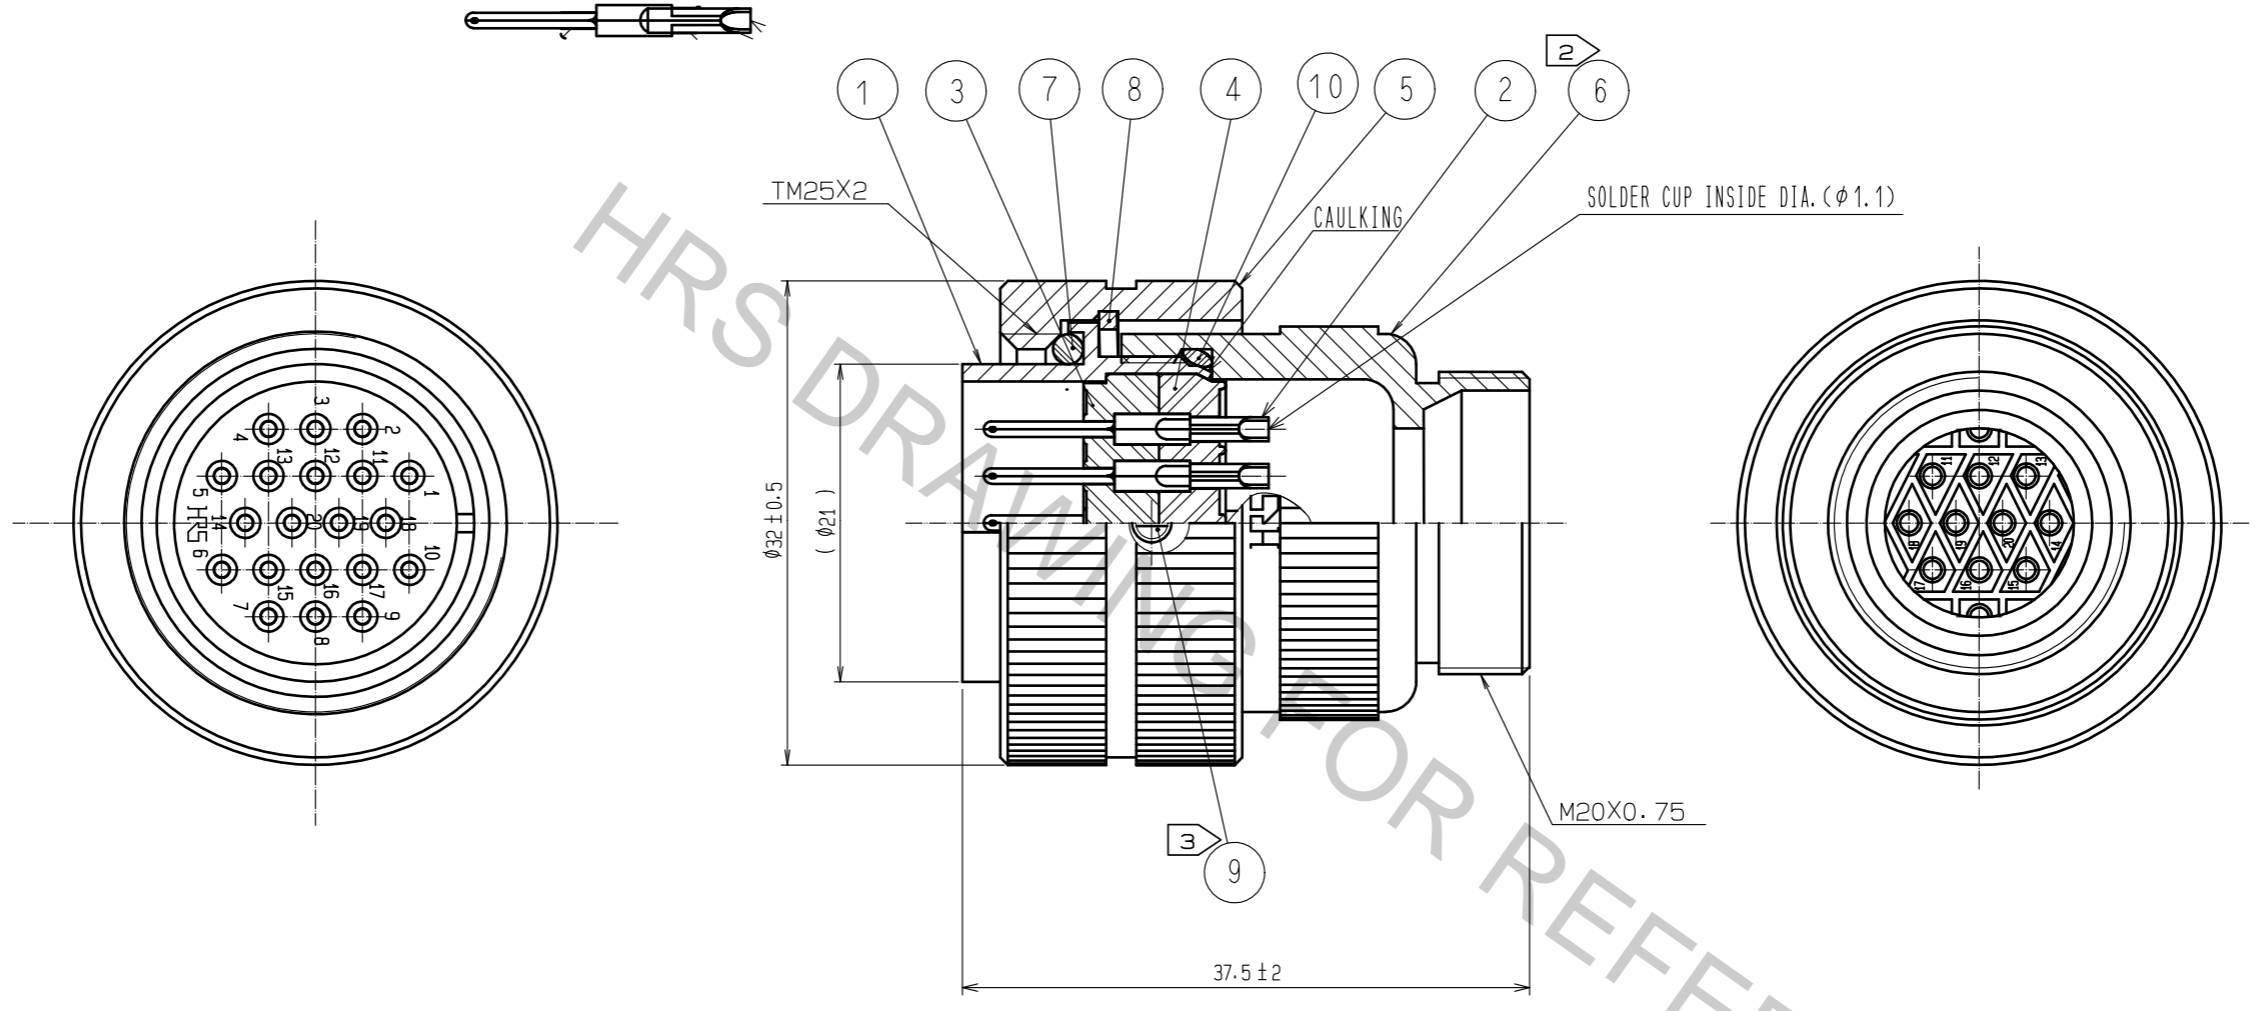

- NOTES
- 1 ONE EXAMPLE OF THE ROTATION OF REF. ⑥ TO REF. NO. ① IS SHOWN.
 - ② THE RECOMMENDED CLAMP TORQUE, REF. NO. ② : 2 TO 3N · m.
 - ③ THE RECOMMENDED CLAMP TORQUE, REF. NO. ③ : 0.2 TO 0.3N · m.
 LOCTITE 243, HENCKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑨ FROM LOOSENING.
 - 4 THIS PRODUCTS TO BE USED WITH CABLE CLAMP, RM21WTP-CP(+)(71)
 ※ DESIGNATE DIAMATER(mm) OF APPLICABLE CABLE.
 - 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CTERISTICS MAY DIFFER,
 DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	BRASS	NICKEL PLATING	10	CHLOROPRENE RUBBER	(BLACK)
4	DIALLYL PHTHALATE	(BLACK) UL94V-0	9	BRASS	NICKEL PLATING
3	DIALLYL PHTHALATE	(BLACK) UL94V-0	8	PHOSPHOR BRONZE	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 2μm min. △	7	CHLOROPRENE RUBBER	(BLACK)
1	BRASS	NICKEL PLATING	6	BRASS	NICKEL PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	1	DIS-C-00002214	HY. KISHI	HY. KOBAYASHI	18. 04. 17

APPROVED	: HY. KOBAYASHI	18. 02. 22	DRAWING NO.	EDC-110105-31-00
CHECKED	: HY. KOBAYASHI	18. 02. 22	PART NO.	RM21WTP-20P(31)
DESIGNED	: HY. KISHI	18. 02. 22	CODE NO.	CL109-1404-0-31
DRAWN	: MK. INOUE	18. 02. 08		