

REV. A


DCO 144520

COIL: @ 25°C	
RESISTANCE	650 OHMS ± 10
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	9.5 VDC
MUST RELEASE	5.6 VDC MAX, 1.0 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 Hz TO 3000 Hz @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

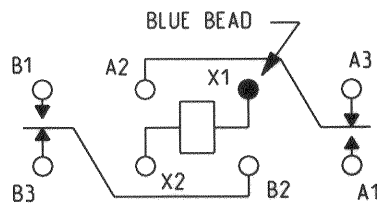

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

DR. B.D. 11SEP2008

CK. *[Signature]* 2/11/08



©COPYRIGHT 2005

TYCO ELECTRONICS CORPORATION  
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL  
CUST. NO. M39016/13-077P REV.

TE NUMBER  
2-1617073-3

CII PART NUMBER

3SBC 2022A2