




ISOMETRIC VIEW

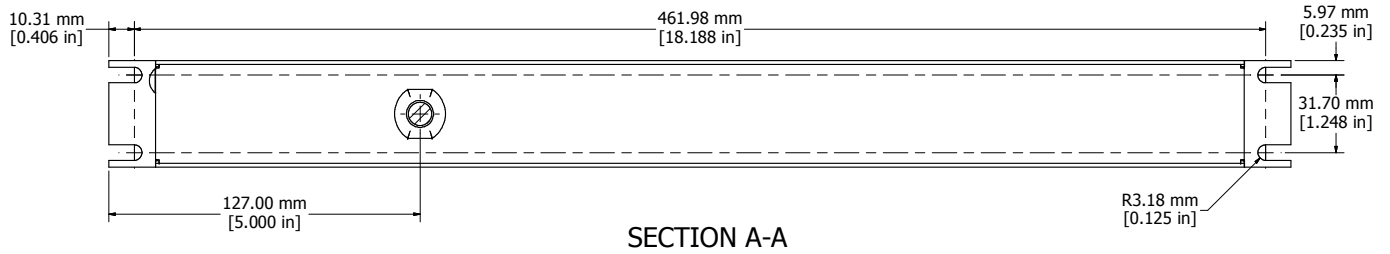

ASSEMBLY - VIEW FROM SIDE

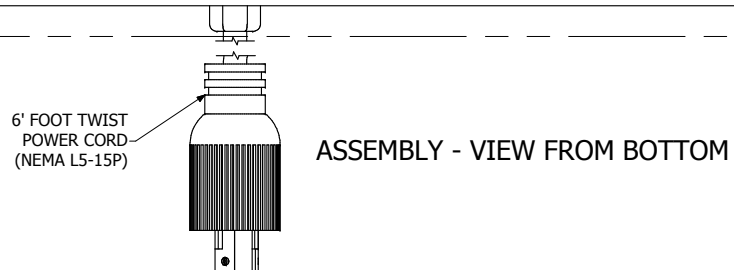

1582H6**S**
Finish - Front - Black Painted Steel
Back - Black Painted Steel
Rated - 125 VAC, 60 Hz, 15 Amps
Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99)
- CSA No. 8-M1986
Surge Specs - 780 Joules, 54000 Amps Transient Current
- Protection in 3 AC Modes (L-N, N-G, L-G)
Colours & Cord Length
1582H6C1SBK - Black w/ 6' Foot Twist Power Cord (NEMA L5-15P)
1582H6C1S - ASA 61 Grey w/ 6' Foot Twist Power Cord (NEMA L5-15P)
1582H6D1SBK - Black w/ 15' Foot Twist Power Cord (NEMA L5-15P)
1582H6D1S - ASA 61 Grey w/ 15' Foot Twist Power Cord (NEMA L5-15P)

HAMMOND MANUFACTURING™

1582H6S****

www.hammondmfg.com