






SWITCH FUNCTION	POS. 1	POS. 2	POS. 3
ON	ON	OFF	ON
2-1, 5-4	OPEN	2-3, 5-6	



- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERMINAL NUMBERS FOR REF ONLY
  4. PLATING MATERIAL: SILVER
  5. CONTACT RATING: 5A @120VAC OR 28VDC, 2A @250VAC
  6. CONTACT RESISTANCE: 10 MILLI-OHMS MAX.
  7. LIFE EXPECTANCY: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
  8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
  9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
  10. OPERATING TEMP.: -30°C to 85°C
  11. ▲ DENOTES CRITICAL PARAMETER.
  12. 2002/95/EC (ROHS) COMPLIANT

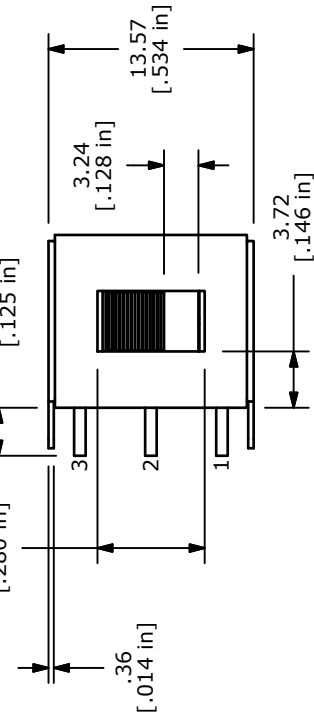

ISOMETRIC

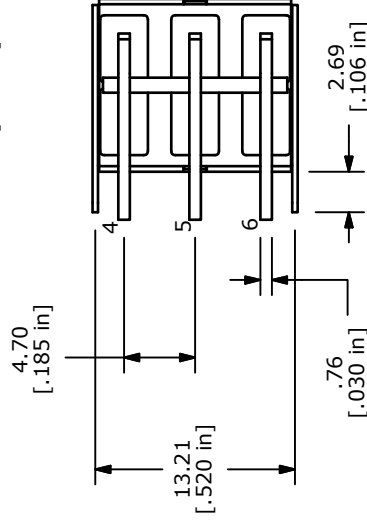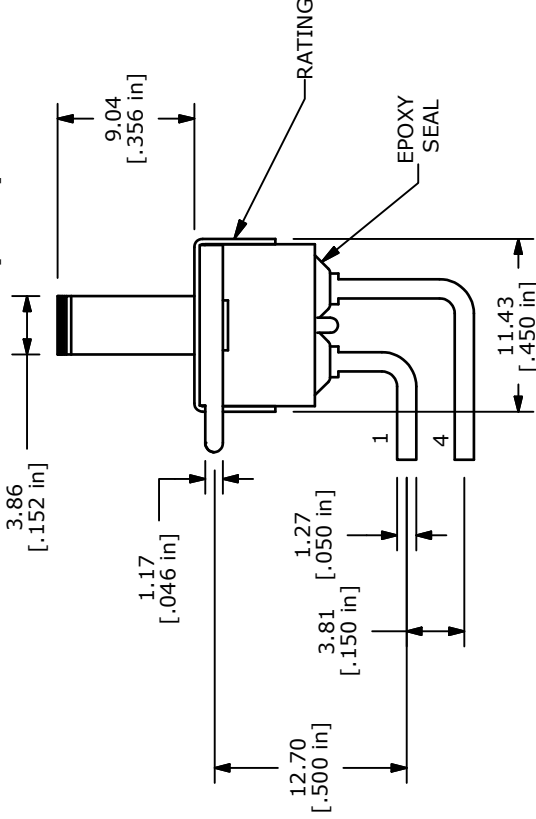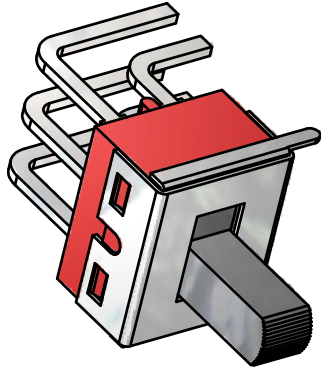

E-SWITCH™

TITLE 500SDP3S3M6QEA

B	19565	DRAWING UPDATE	1/6/11	BGL
A	18554	RELEASED FOR PRODUCTION	7/24/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1

DATE 7/24/2009

DR BLR

DWG T521026

REV B