


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
M		EC 0G3C 0766 04	27DEC04	BSV	JLG
M1		REVISED PER ECO-09-020689	28AUG09	KK	AEG

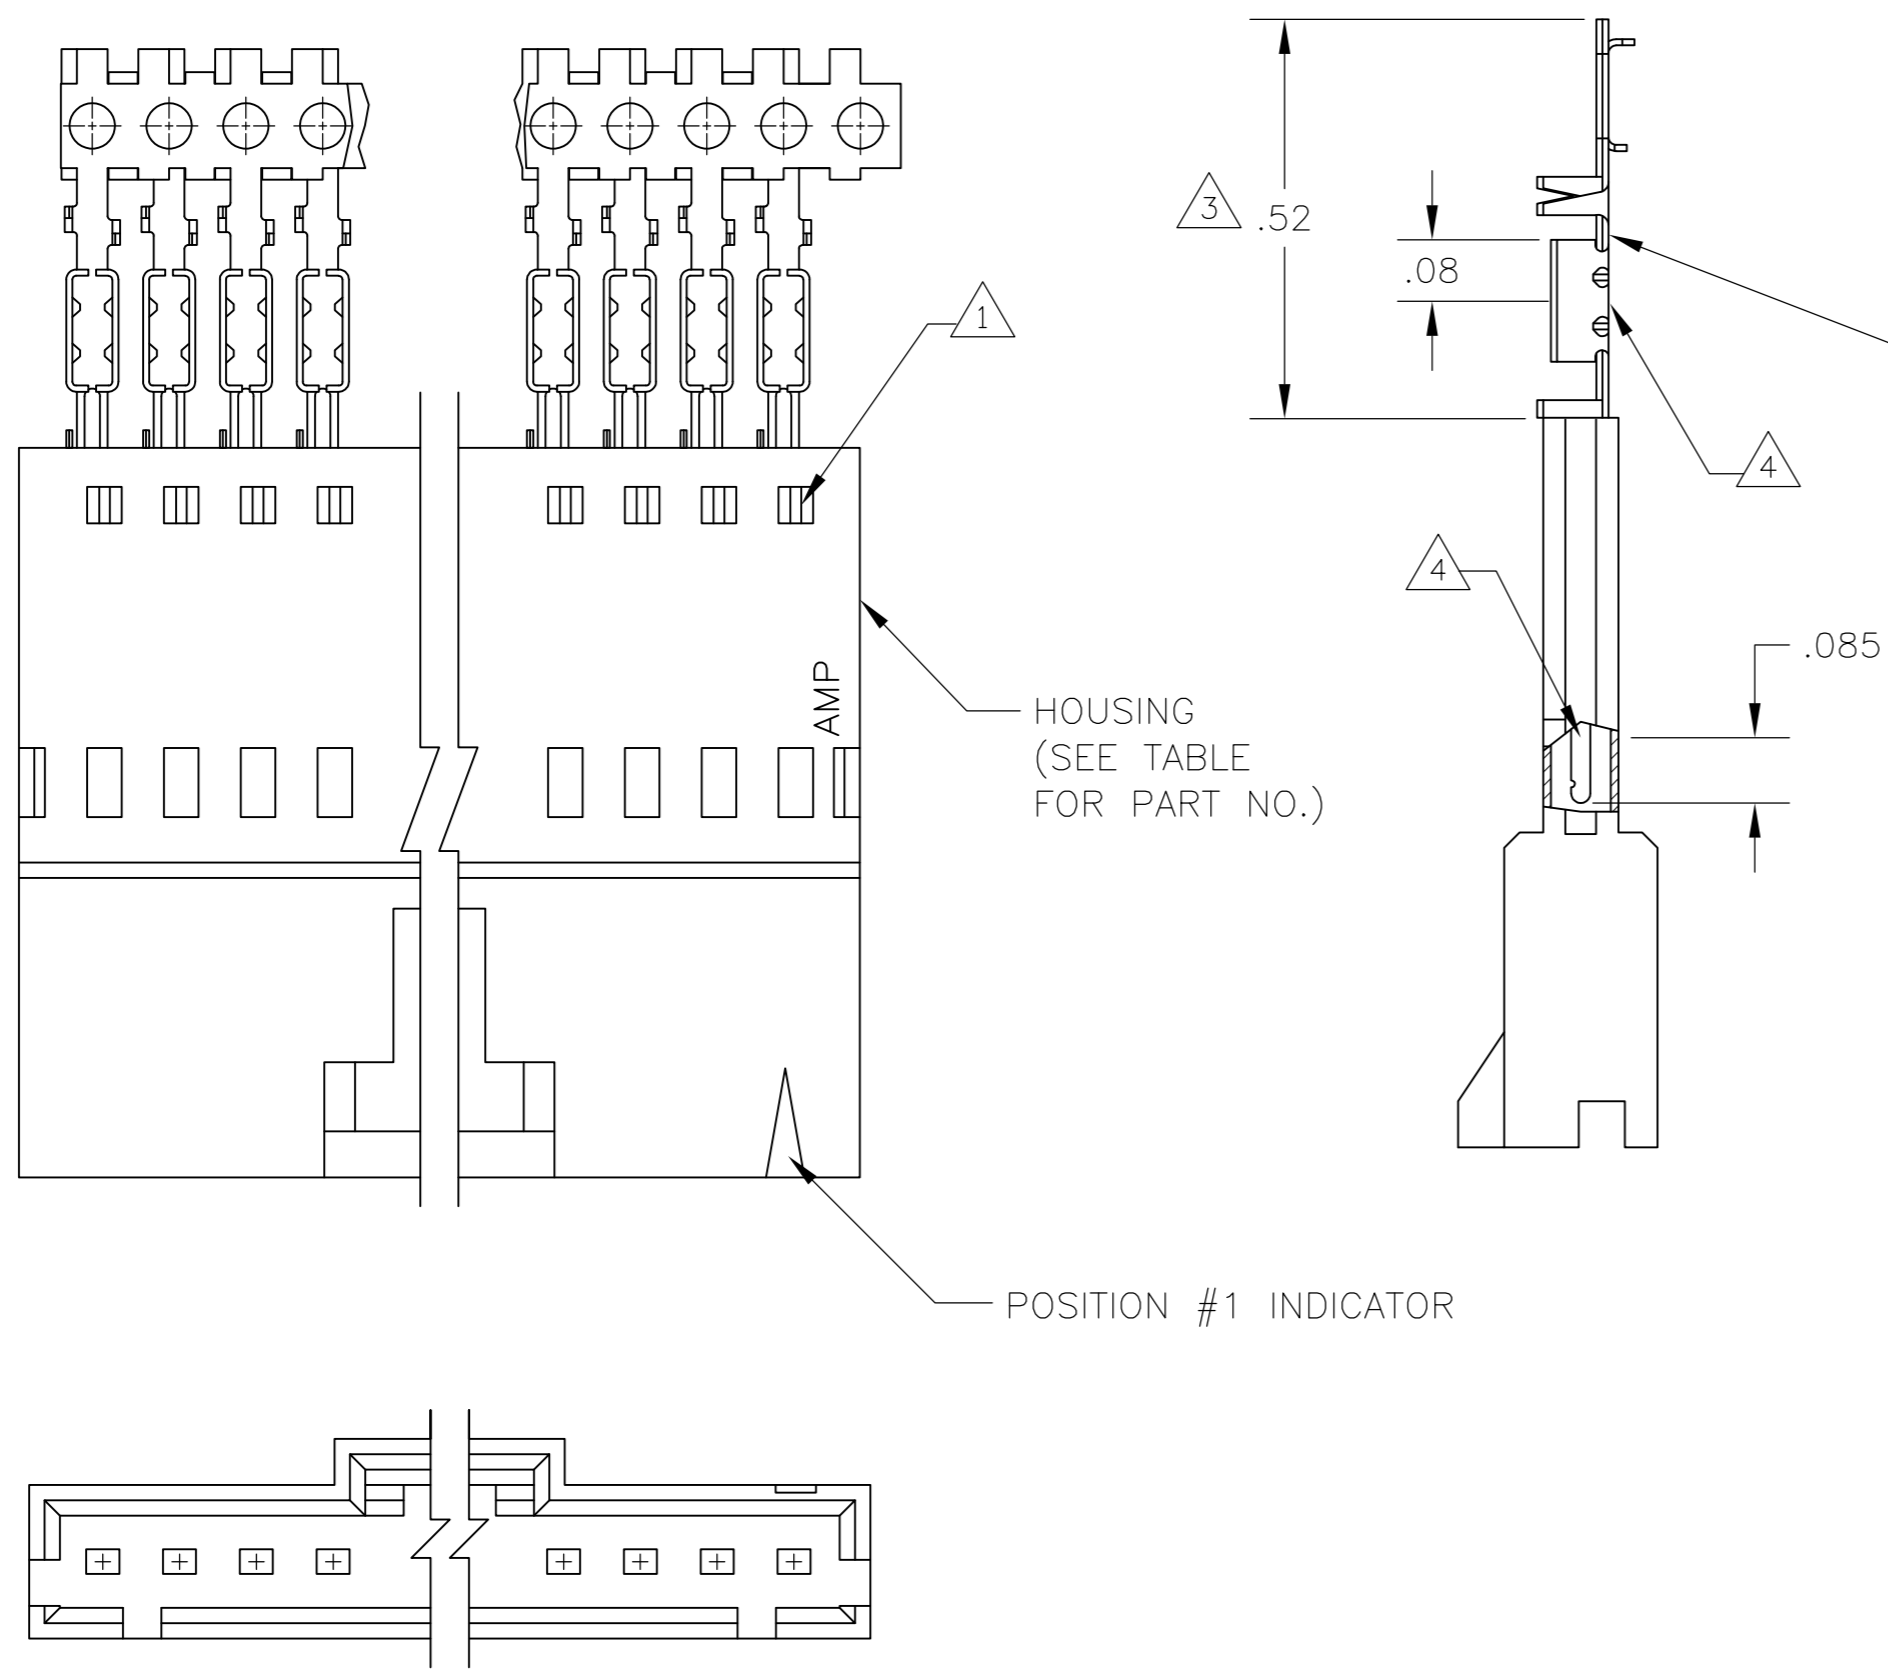

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
8	2-103653-4	25	97-103893-4
8	2-103653-3	24	97-103893-3
8	2-103653-2	23	97-103893-2
8	2-103653-1	22	97-103893-1
8	2-103653-0	21	97-103893-0
8	1-103653-9	20	96-103893-9
8	1-103653-8	19	96-103893-8
8	1-103653-7	18	96-103893-7
8	1-103653-6	17	96-103893-6
8	1-103653-5	16	6-103893-5
8	1-103653-4	15	96-103893-4
8	1-103653-3	14	96-103893-3
8	1-103653-2	13	96-103893-2
7	2-103653-4	25	92-103893-4
7	2-103653-3	24	92-103893-3
7	2-103653-2	23	92-103893-2
7	2-103653-1	22	92-103893-1
7	2-103653-0	21	92-103893-0
7	1-103653-9	20	91-103893-9
7	1-103653-8	19	91-103893-8
7	1-103653-7	18	91-103893-7
7	1-103653-6	17	91-103893-6
7	1-103653-5	16	1-103893-5
7	1-103653-4	15	91-103893-4
7	1-103653-3	14	91-103893-3
7	1-103653-2	13	91-103893-2
7	1-103653-1	12	1-103893-1
7	1-103653-0	11	1-103893-0
7	103653-9	10	103893-9
7	103653-8	9	103893-8
7	103653-7	8	103893-7
7	103653-6	7	103893-6
7	103653-5	6	103893-5
7	103653-4	5	103893-4
7	103653-3	4	103893-3
7	103653-2	3	103893-2
7	103653-1	2	103893-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103946
- 6 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK PINS: PHOS. BRONZE
- 7 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 8 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY 1-103946-1	1-103653-1	12	1-103893-1
SUPERSEDED BY 1-103946-0	1-103653-0	11	1-103893-0
SUPERSEDED BY 103946-9	103653-9	10	103893-9
SUPERSEDED BY 103946-8	103653-8	9	103893-8
SUPERSEDED BY 103946-7	103653-7	8	103893-7
SUPERSEDED BY 103946-6	103653-6	7	103893-6
SUPERSEDED BY 103946-5	103653-5	6	103893-5
SUPERSEDED BY 103946-4	103653-4	5	103893-4
SUPERSEDED BY 103946-3	103653-3	4	103893-3
SUPERSEDED BY 103946-2	103653-2	3	103893-2
SUPERSEDED BY 103946-1	103653-1	2	103893-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 26JUL00	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK K WRIGHT 26JUL00	NAME SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, POLARIZED, WITH LATCH WINDOWS, FOR #22-#26 AWG WIRE SIZE	
	0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ± - ANGLES ± - ± -	APVD K WRIGHT 26JUL00	PRODUCT SPEC 108-25034	
MATERIAL	FINISH SEE TABLE	APPLICATION SPEC 114-25026	SIZE A2	CAGE CODE 00779
		WEIGHT -	DRAWING NO 103893	
		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1 REV M1