
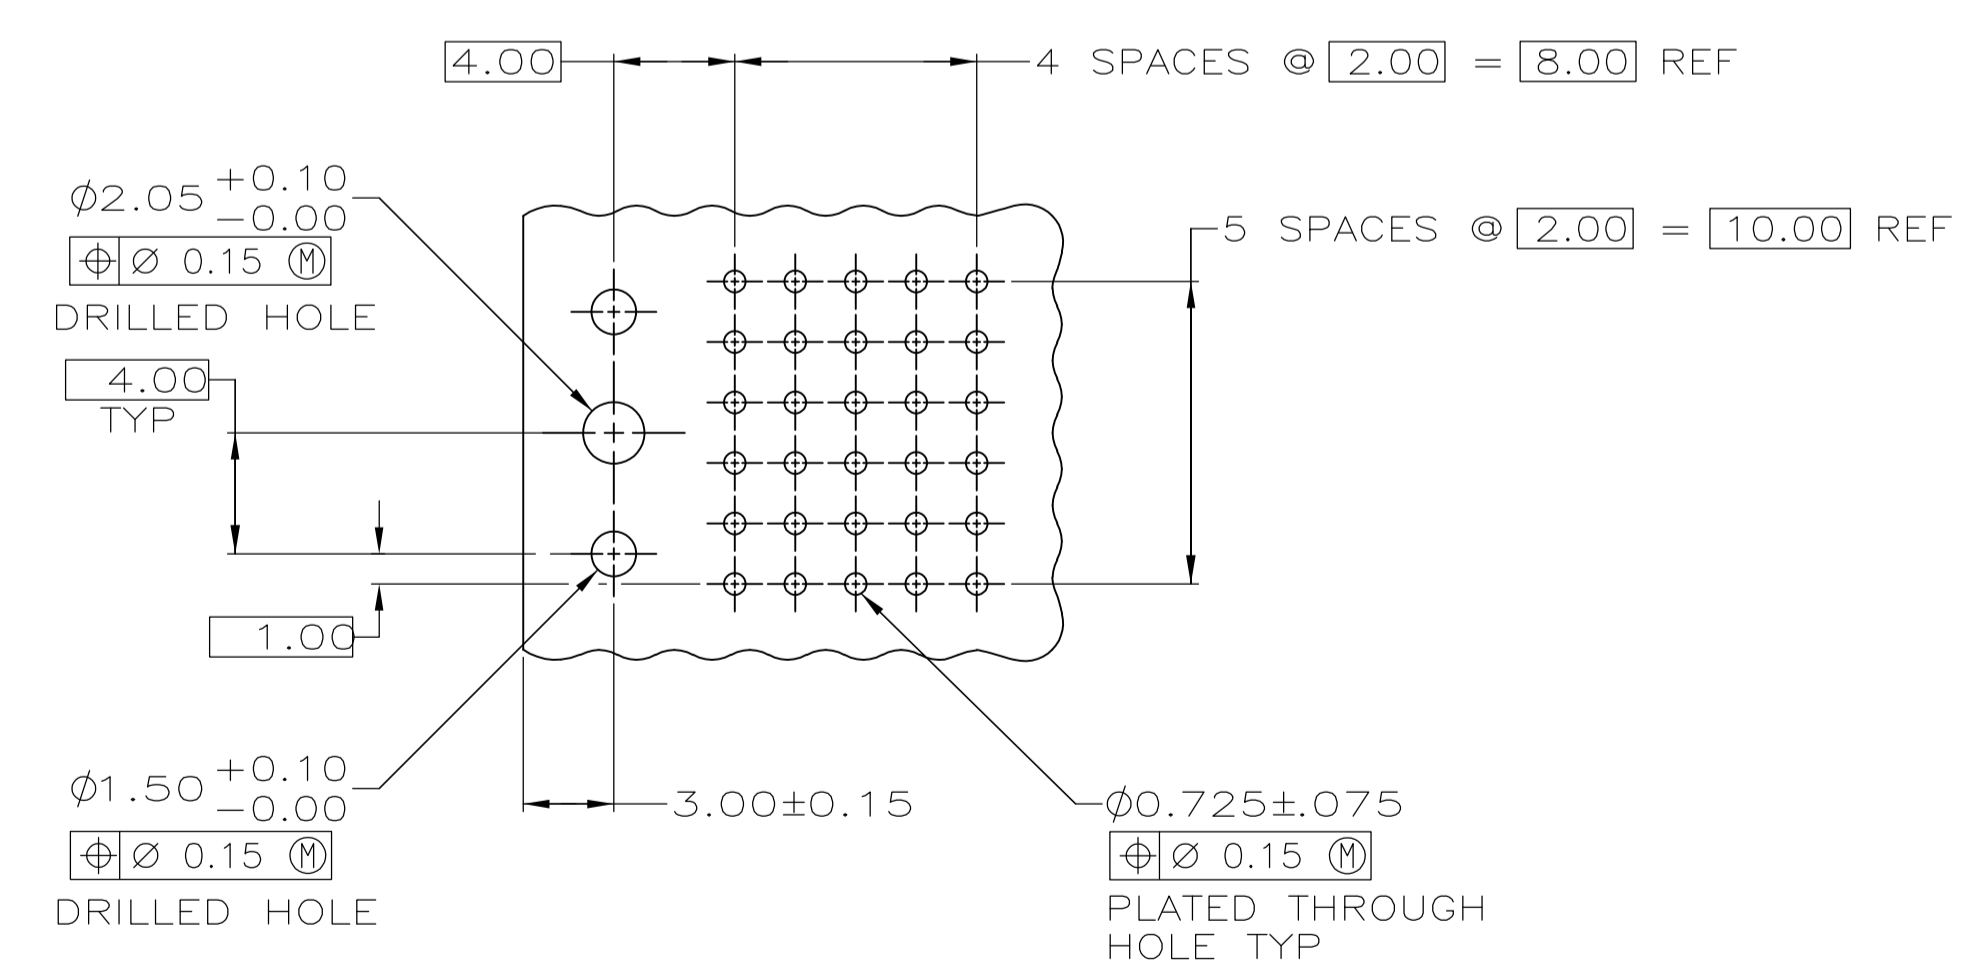
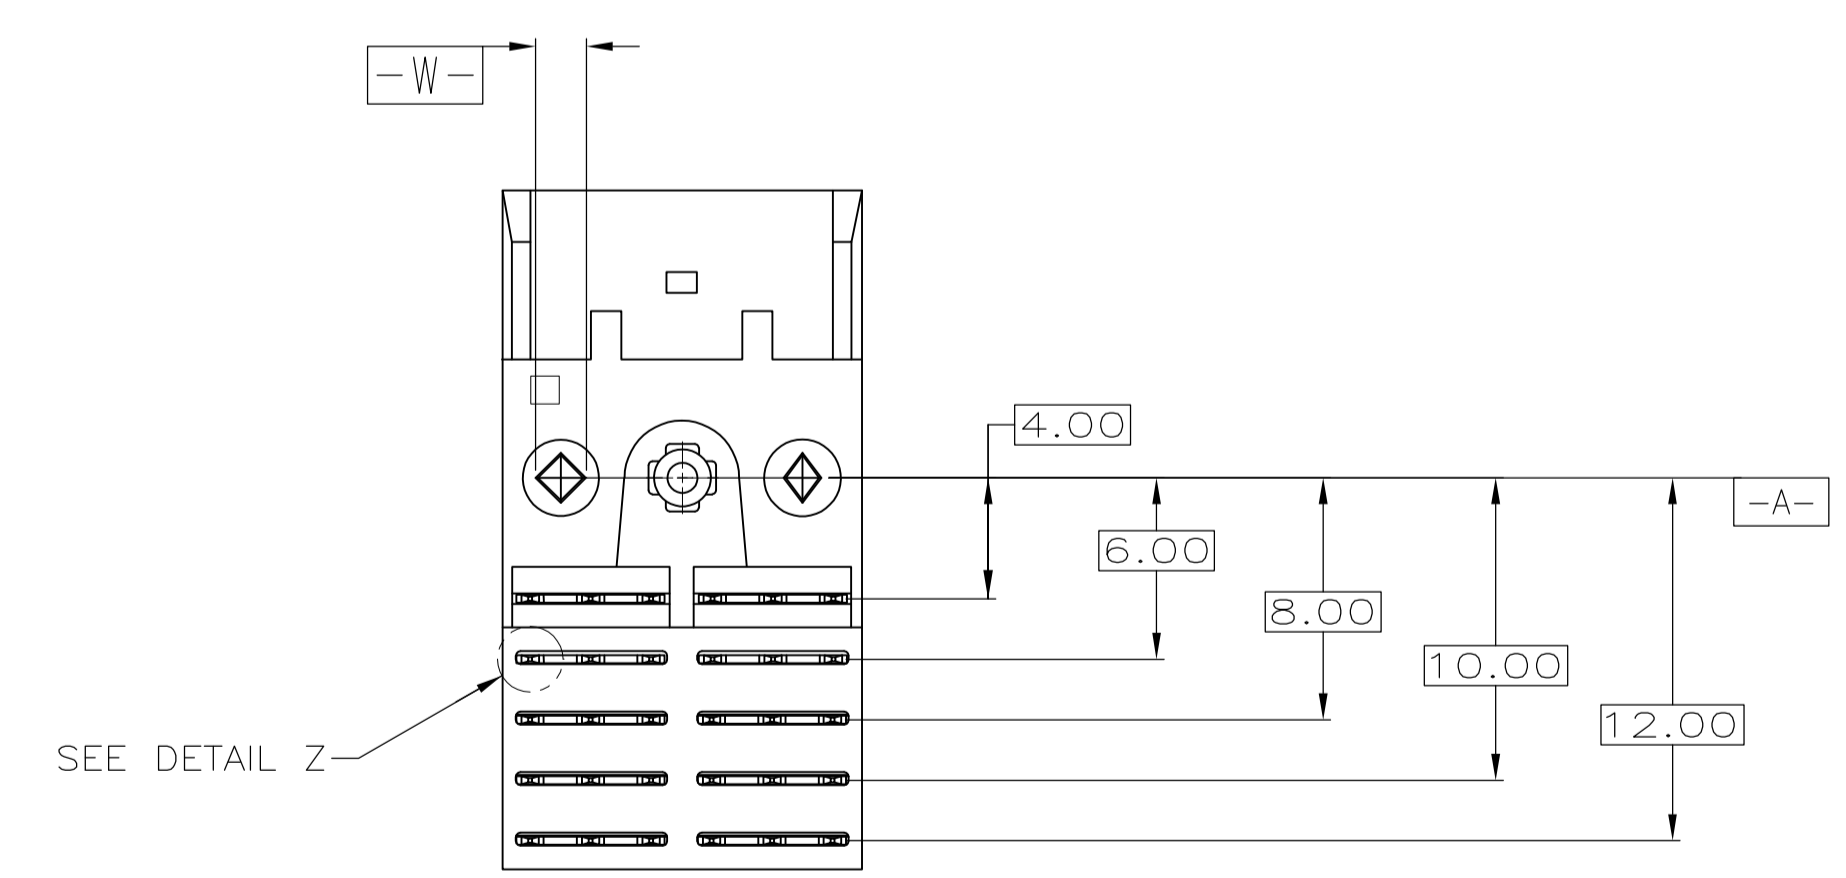
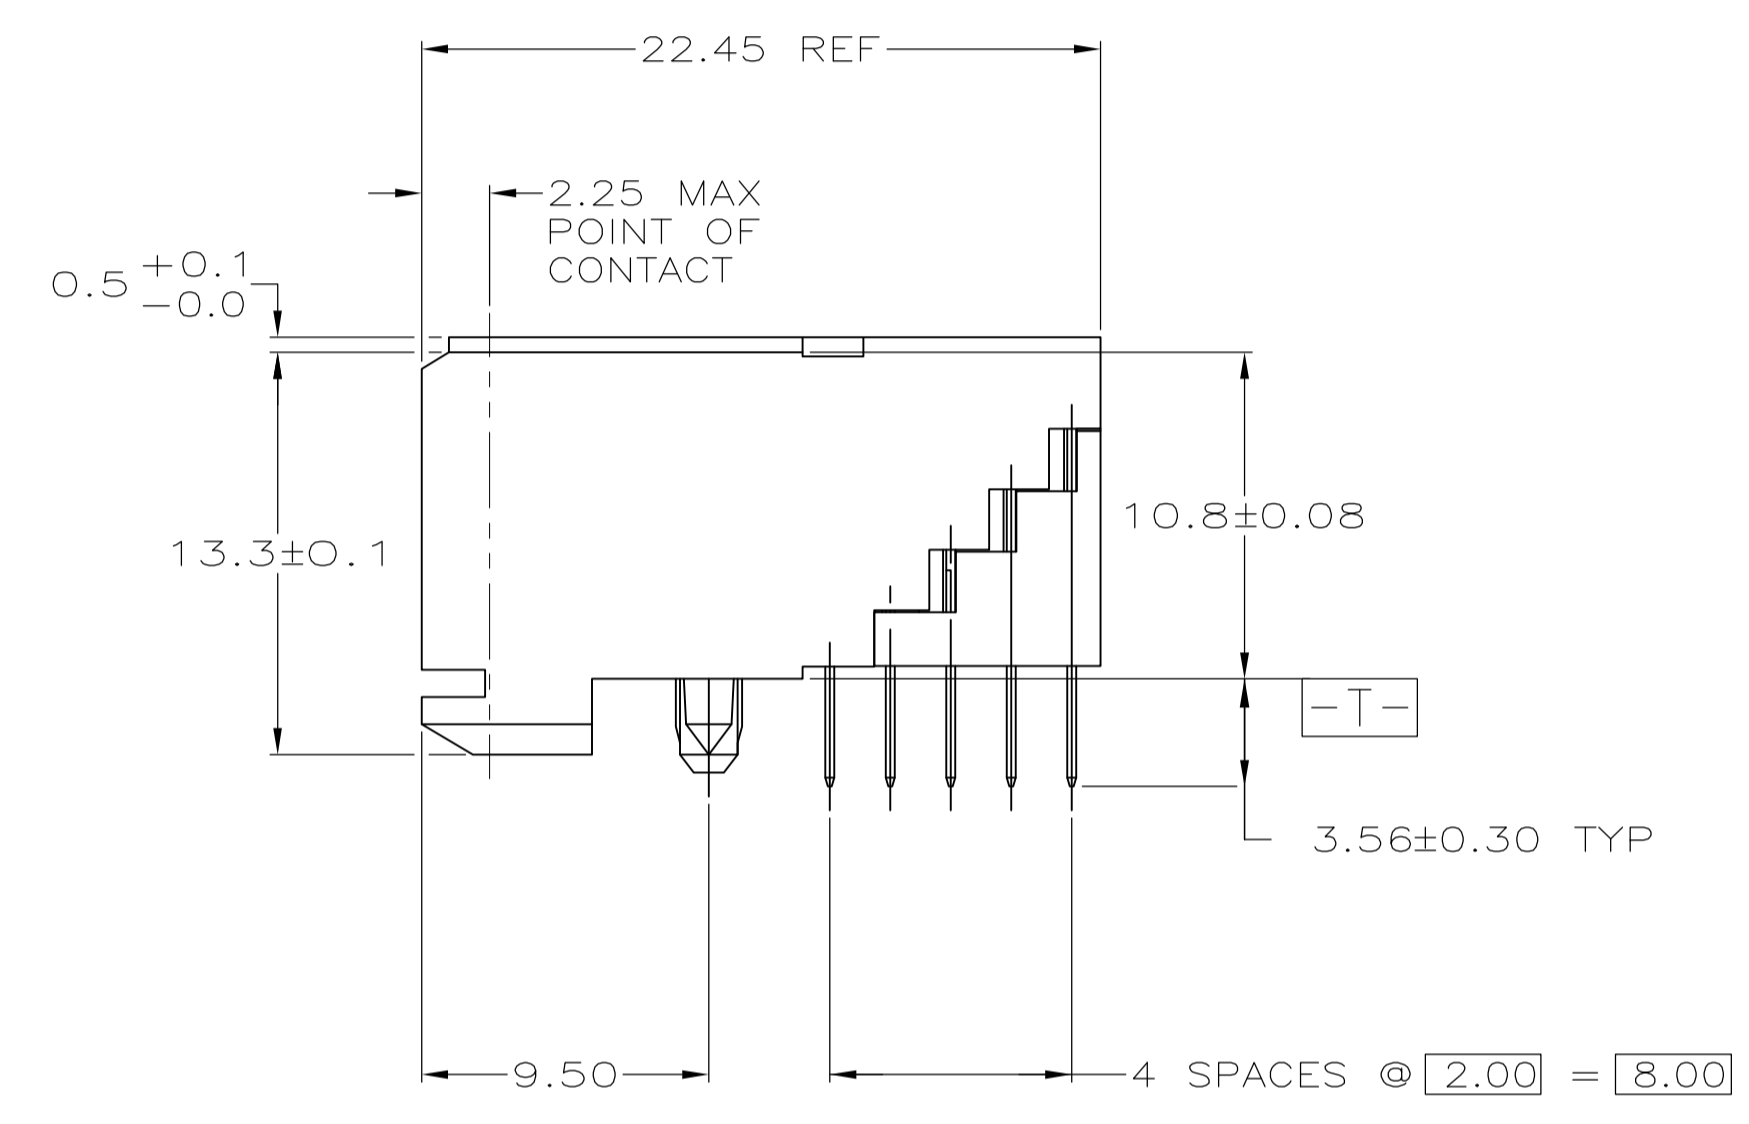


- ① HOUSINGS MATERIAL: LIQUID CRYSTAL POLYMER.
- ② CONTACT MATERIAL: COPPER ALLOY
- ③ CONTACT FINISH:(D)
 UNDERPLATE (ENTIRE CONTACT):
 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
 ON MATING SURFACES:
 FLASH GOLD PER ASTM B 488, OVER
 0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
 0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
 ON LEADS:
 0.00127 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
 LUBRICATION (MIN MATING SURFACES):
 SURFACE CONDITIONER AFTER PLATING.

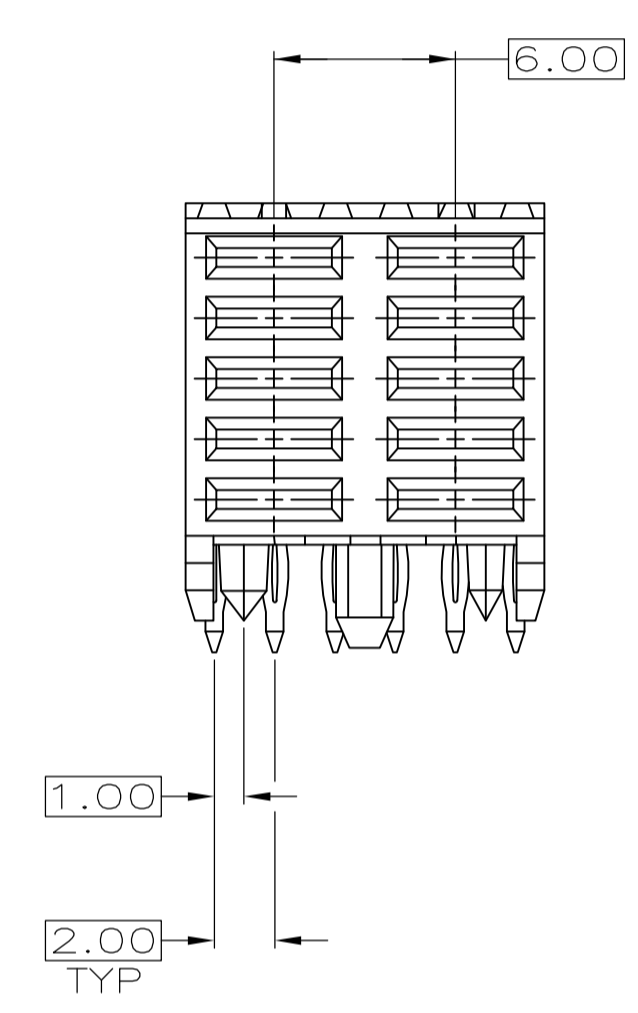

RECOMMENDED CURCUIT PATTERN
 PER IPC-D300 TYPE II, CLASS C
 (COMPONENT SIDE)

③	5536676-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN T. SHUEY 5-29-98		Tyco Electronics Corporation	
DIMENSIONS: mm		CHK D. KOVALICK 6-2-98		Harrisburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. KOVALICK 6-2-98		NAME	
0 PLC	± -	RCPT ASSEMBLY, POWER, Z-PACK 2mm FB, R/A, 5 ROW, 10 POSN, W/TAIL ORGANIZER			
1 PLC	± -	PRODUCT SPEC			
2 PLC	± 0.13	APPLICATION SPEC			
3 PLC	± -	SIZE			
4 PLC	± -	CAGE CODE			
ANGLES	± -	DRAWING NO			
MATERIAL	FINISH	A1 00779		C=5536676	
① ② ③		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV 01	