



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		N		REVISED PER ECO-12-014020	01AUG2012	RW	SY

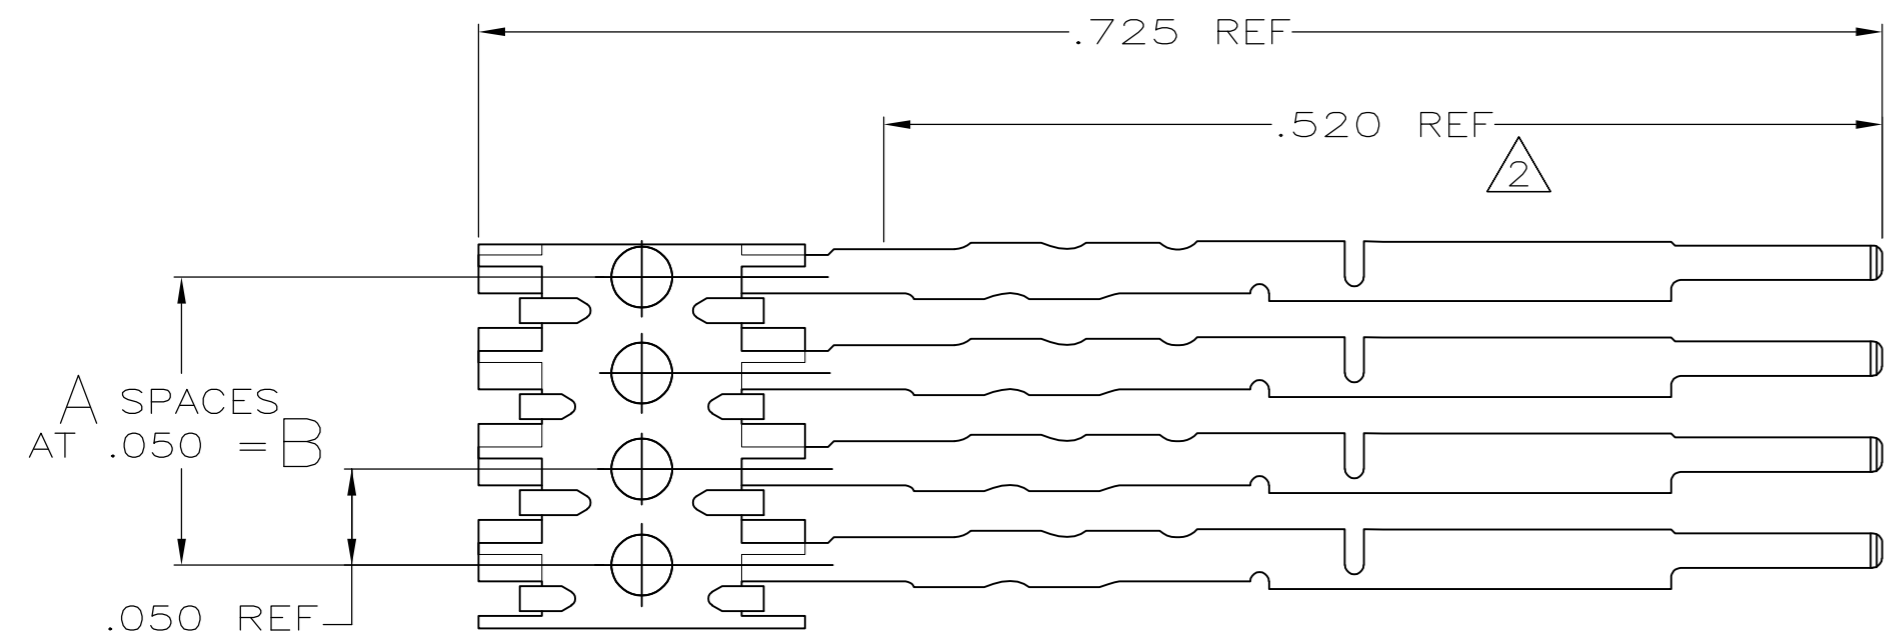

OBSOLETE

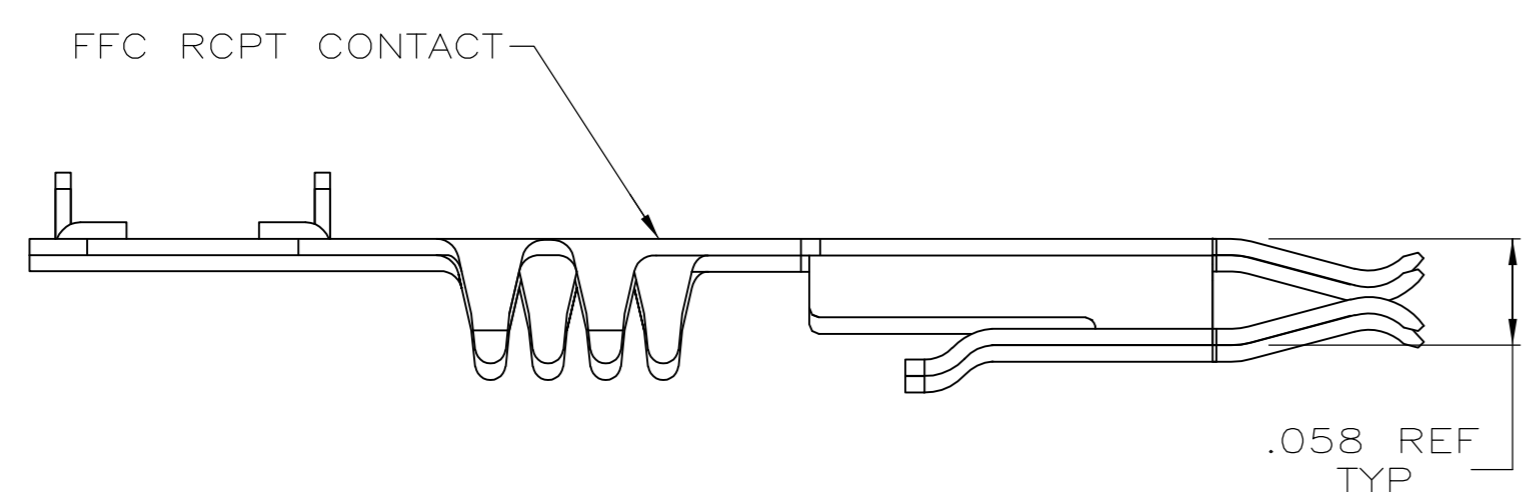

- ① NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT, WITH GOLD .000030 MIN THK ON MATING AREA, AND BRIGHT TIN/LEAD .000100 MIN THK ON CRIMP AREA,
-OR-
NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT, GOLD FLASH OVER PALLADIUM-NICKEL, .000030 MIN TOTAL THK ON MATING AREA AND BRIGHT TIN/LEAD .000100 MIN THK ON CRIMP AREA.
- ② LENGTH AFTER BEING CUT-OFF FROM CARRIER STRIP.
- 3. TO BE TERMINATED TO FLEXIBLE FLAT CONDUCTOR CABLE IN APPLICATOR 818973-1.
- 4. MIN MATING POST LENGTH .125.
- ⑤ NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT, WITH GOLD .000030 MIN THK ON MATING AREA, AND GOLD FLASH ON CRIMP AREA,
-OR-
NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT, GOLD FLASH OVER PALLADIUM-NICKEL, .000030 MIN TOTAL THK ON MATING AREA AND GOLD FLASH ON CRIMP AREA.

OBSOLETE	1-487547-1	⑤	1.450	29	30	4-487558-8
OBSOLETE	487547-1	①	2.450	49	50	4-487558-7
OBSOLETE	487547-1	①	2.200	44	45	4-487558-2
OBSOLETE	487547-1	①	1.950	39	40	3-487558-7
OBSOLETE	487547-1	①	1.750	35	36	3-487558-3
OBSOLETE	487547-1	①	1.650	33	34	3-487558-1
OBSOLETE	487547-1	①	1.450	29	30	2-487558-7
OBSOLETE	487547-1	①	1.200	24	25	2-487558-2
OBSOLETE	487547-1	①	1.050	21	22	1-487558-9
OBSOLETE	487547-1	①	.950	19	20	1-487558-7
OBSOLETE	487547-1	①	.800	16	17	1-487558-4
OBSOLETE	487547-1	①	.700	14	15	1-487558-2
OBSOLETE	487547-1	①	.600	12	13	1-487558-0
OBSOLETE	487547-1	①	.550	11	12	487558-9
OBSOLETE	487547-1	①	.500	10	11	487558-8
OBSOLETE	487547-1	①	.450	9	10	487558-7
OBSOLETE	487547-1	①	.350	7	8	487558-5
SUPSD BY	487547-1	①	.300	6	7	487558-4
OBSOLETE	487547-1	①	.250	5	6	487558-3
OBSOLETE	487547-1	①	.200	4	5	487558-2
OBSOLETE	487547-1	①	.150	3	4	487558-1

RCPT CONTACT PART NO (REF)		FINISH	B	A	NO OF POSN	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	10-28-85			
D.DOLLYHIGH		CHK	10-28-85			
D.R.WORTHINGTON		APVD	-			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
0 PLC ± -		1 PLC ± -		TE Connectivity		
1 PLC ± -		2 PLC ± -		CONTACT, RCPT, COMB, .050 C/L, FFC		
2 PLC ± -		3 PLC ± .005		-		
3 PLC ± .005		4 PLC ± -		SIZE		
4 PLC ± -		ANGLES ± -		CAGE CODE		
MATERIAL		FINISH		DRAWING NO		
PHOSPHOR BRONZE		SEE TABLE		114-16008		
				RESTRICTED TO		
				A2 00779 C=487558		
				SCALE 4:1 SHEET 1 OF 1 REV N		
				CUSTOMER DRAWING		