



A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

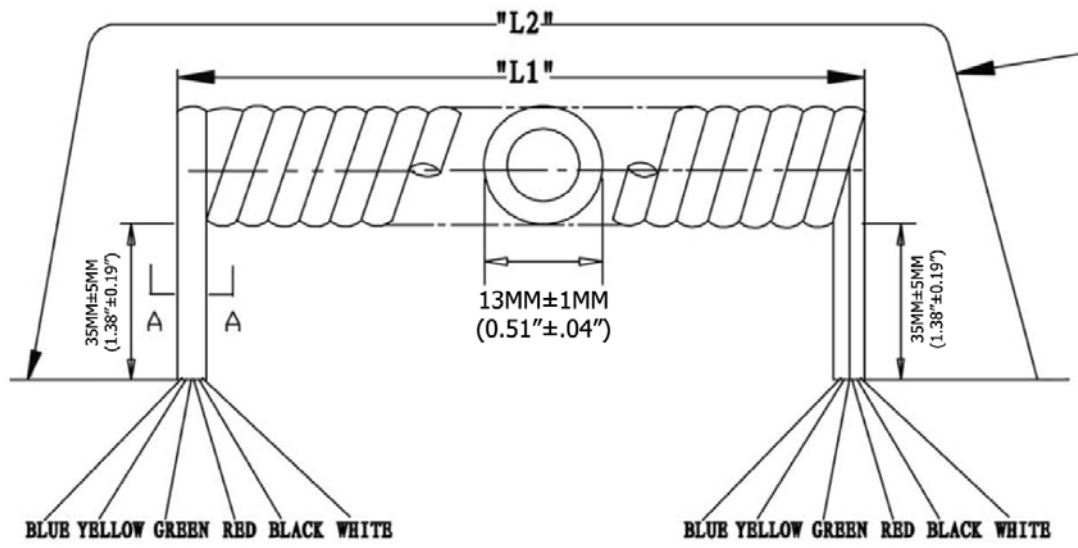

Extended length is with 500g of force

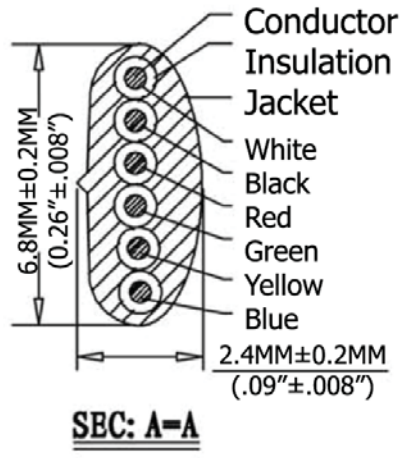

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	29.5 Inches
2,133.6MM-2,453.64MM	749.3MM

- Material:**
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
  - Insulation(X6C):PP6331 ID 0.95-1.0
  - Jacket: PVC NO UL 80P
  - Package: Individual PE Bag



Scale	1:1						Name	Item No. <b>AT-K-C-26-6-B/7</b>
TOLERANCE					Drawn	11.02.11	Chappell	
X.X	±0.40				Approved			Title NON-UL 26AWG (0.16/7)*6C, O.D.: 2.4*6.8MM, Pre-Cut, 7Ft. Black
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								Drawing No.
								<b>rev00</b>
								Replace
								Sheet

