

VSC7410

6-Port SGMII Gigabit Ethernet Switch with VeriTime™ and Gigabit Ethernet PHYs

Microsemi's Serval-T switch family offers the highest performance, market-ready solution for IEEE 1588v2.

The VSC7410 switch targets small cell equipment to deliver Enterprise and Mobile Backhaul. VSC7410 supports VeriTime™, Microsemi's patent-pending timing technology that delivers the industry's most accurate IEEE 1588v2 time stamping. Combined with PTP software and an advanced Servo algorithm, Microsemi offers the most accurate 1588 solution.

The VSC7410 Gigabit Ethernet switch contains four 10/100/1000 Mbps ports (up to two copper ports), and two 10/100/1000/2500 Mbps ports. The Versatile Content Aware Processor (VCAP™) architecture is scalable and flexible for secure applications. It features advanced TCAM classification in both ingress and egress.

VSC7410 supports IPv4/IPv6 Layer-3 (L3) routing and IPv4/IPv6 L3 multicast groups. L3 security features include source guard and unicast Reverse Path Forwarding (uRPF) tasks.


VSC7410 supports Microsemi's application programming interface for easy integration with third-party application software. The device also supports Microsemi's IStax application software, dramatically reducing time-to-market.

Highlights

- Integrated timing VeriTime™ SyncE
- Layer-3 routing support

Applications

- Microcell, femtocell, and picocell base stations
- Small cell backhaul systems

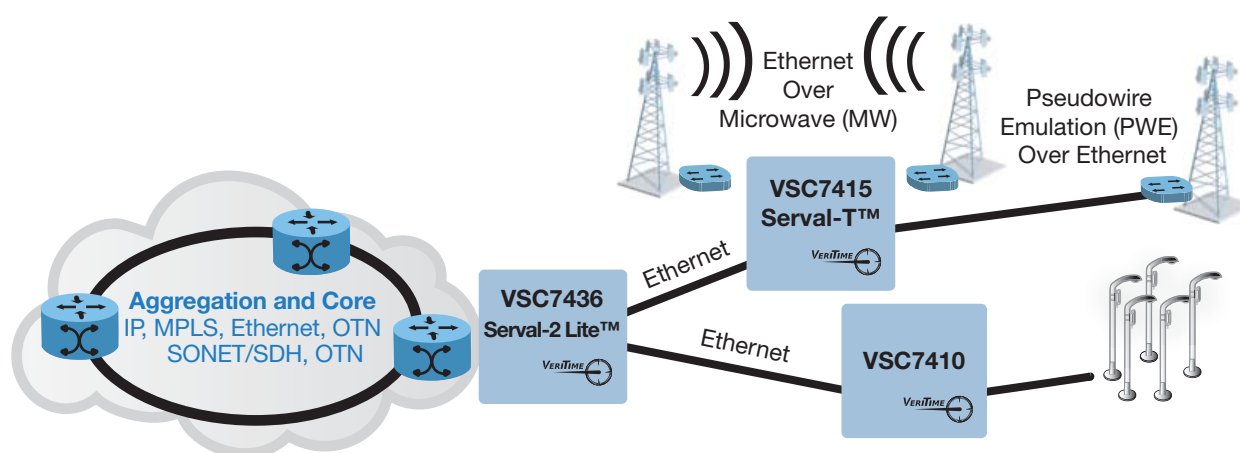

VSC7410

6-Port SGMII Gigabit Ethernet Switch with VeriTime™ and Gigabit Ethernet PHYs

Features

- 4 × 10/100/1000 ports (up to two copper)
- 2 × 10/100/1000/2500 ports
- Advanced security and classification available through multistage TCAM engines
- Integrated shared packet memory
- Fully nonblocking wire-speed switching performance for all frame sizes
- 8 QoS classes
- Energy Efficient Ethernet (EEE)
- Integrated MIPS-24KEc CPU with DDR3 SDRAM controller
- PCIe for control/status register access

Layer 2 Switching

- 802.1Q VLAN switch
- Provider bridging (Q-in-Q)
- Classify and modify up to three VLAN tags
- 512/256 IPv4/IPv6 multicast groups using snooping
- Policing with storm control and MC/BC protection
- RSTP and MSTP support
- Hardware- and software-based learning
- Link aggregation (IEEE 802.3ad)
- Independent and shared VLAN learning (IVL, SVL)
- Jumbo frame support

Layer 3 Routing

- 1K/256 IPv4/IPv6 table entries (LPM and hosts)
- 512/256 IPv4/IPv6 (S, G, V) or (*, G, V) multicast groups
- Wirespeed routing

VeriTime™ Features

- IEEE 1588v2
- L1 Synchronous Ethernet
- Boundary clock and transparent clock
- PTP software and advanced Servo algorithm

Key Specifications

- 19 mm × 19 mm BGA
- Low power dissipation
- Operating temperature –40 °C to 125 °C

Related Products

Visit www.microsemi.com for information about these related products:

- VSC7414-01 SparX-III™ 11-port SGMII Gigabit Ethernet Enterprise switch with VeriTime™
- VSC7415 Serval-T™ 6-port Ethernet switch with ViSAA™, VeriTime™, and integrated DPLL and Gigabit Ethernet PHY
- VSC7436 Serval-2 Lite™ 10-port Carrier Ethernet switch with ViSAA™, VeriTime™ and Gigabit Ethernet PHY
- Unified API and IStax application software

