



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0	0	RELEASED	12JAN2004	SW HW

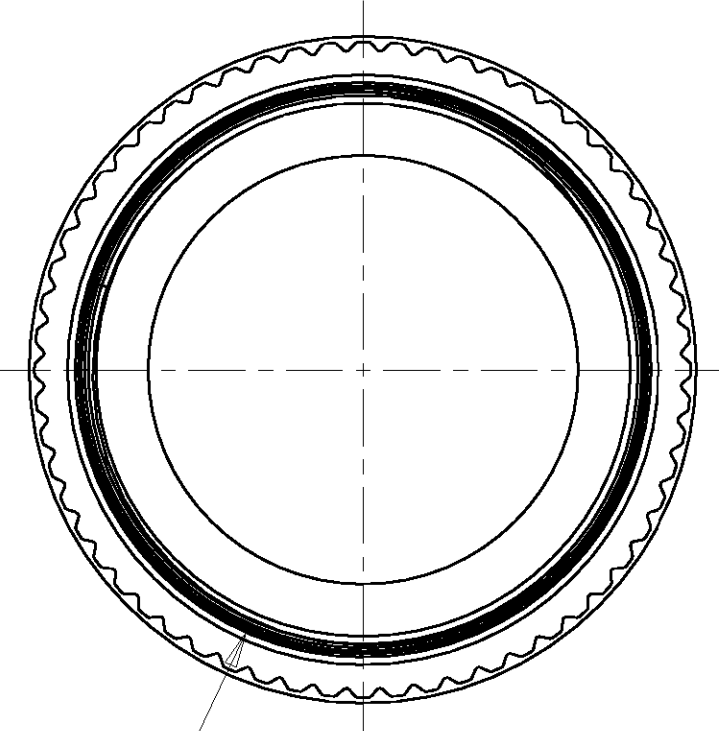

.625-24 UNEF-2B THREAD

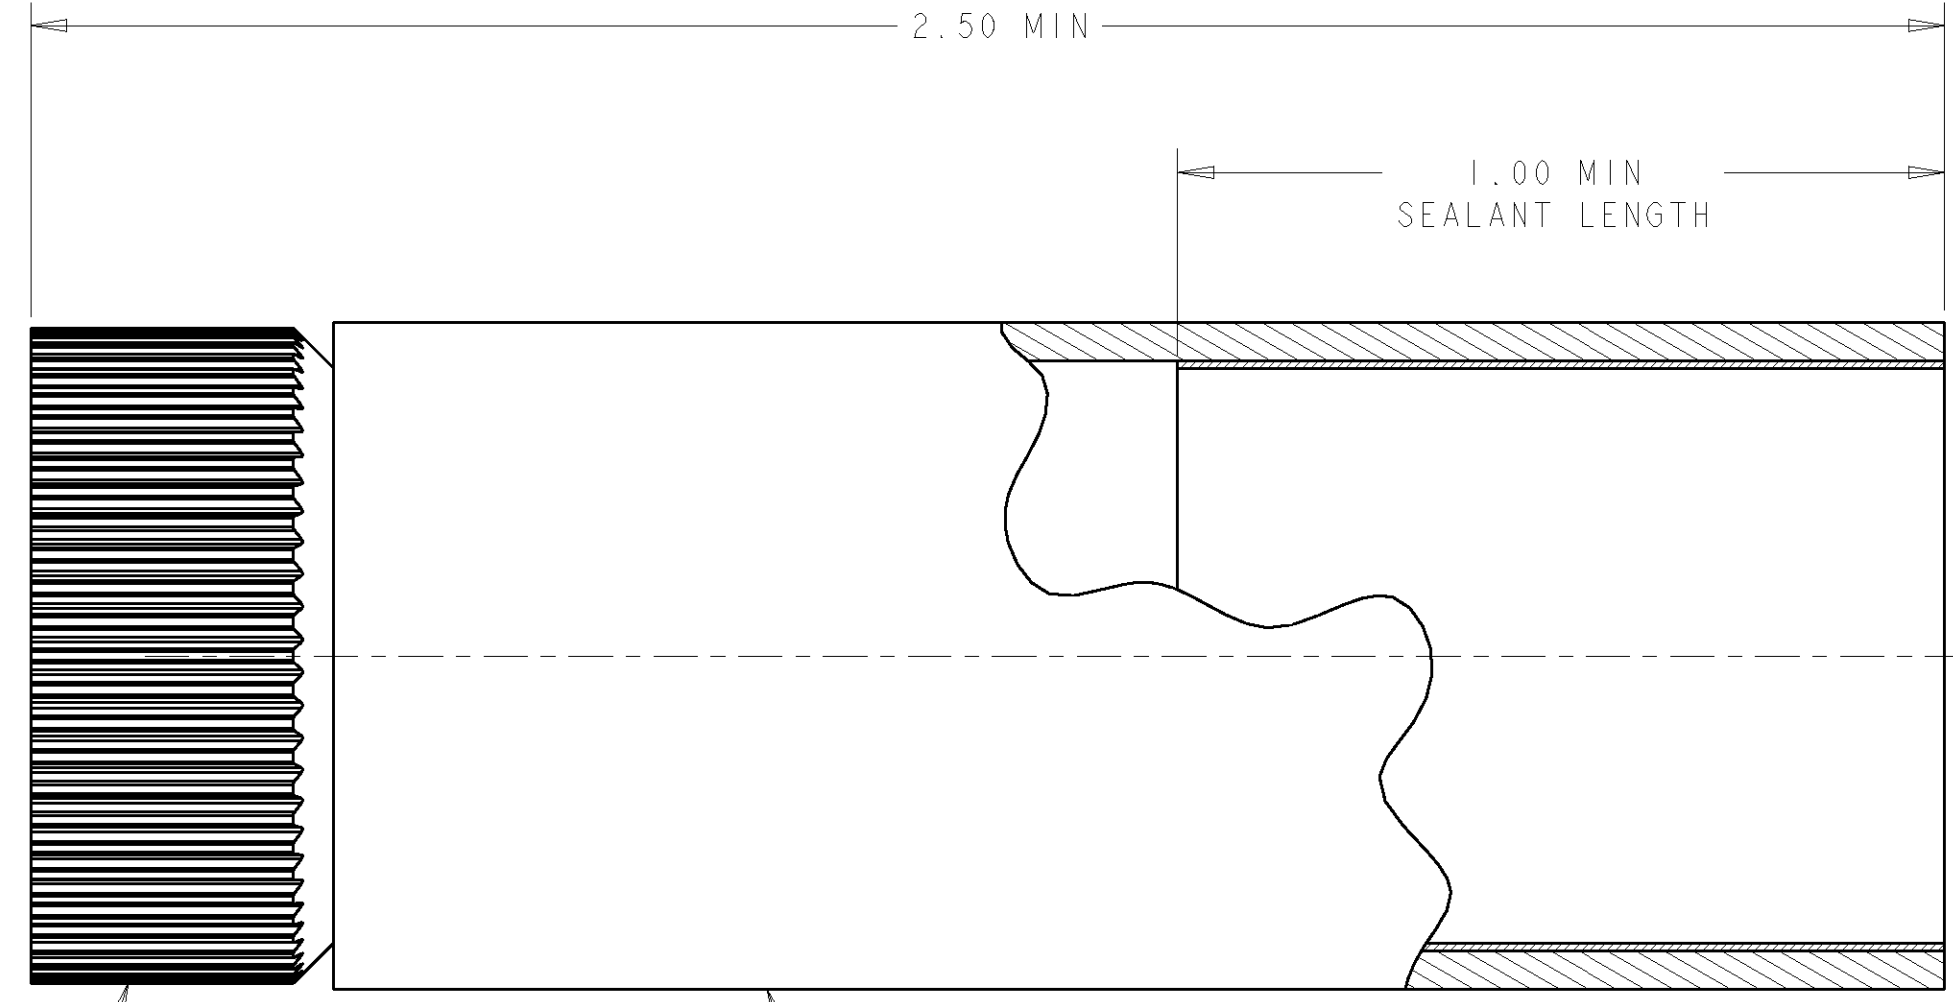

SLEEVE
NYLON, BLACK

TUBING
POLYOLEFIN, BLACK

.625 MIN $\triangle 2$

.050 \pm .015 $\triangle 1$

- $\triangle 1$ NOMINAL WALL THICKNESS, EXPANDED.
- $\triangle 2$ EXPANDED INSIDE DIAMETER.
- $\triangle 3$.250 MAXIMUM RECOVERED INSIDE DIAMETER.
- 4. ASSEMBLY WILL PASS ONE POUND PER SQ INCH WATER PRESSURE TEST.
- 5. TUBING SHRINK TEMPERATURE: 250°F.
- 6. OPERATING TEMPERATURE: -67°F TO 230°F.
- 7. THIS PART WILL ACCOMODATE ϕ .250- ϕ .600 CABLE RANGE.

1546921-1
PART NUMBER

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN S. WELDON 12JAN2004 CHK H. WAKEEM 12JAN2004 APVD H. WAKEEM 12JAN2004	AMP Tyco Electronics Harrisburg, PA 17105-3608
DIMENSIONS: INCHES 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC \pm 1 PLC ± 0.1 2 PLC ± 0.02 3 PLC ± 0.005 4 PLC ± 0.0000 ANGLES \pm FINISH	PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	NAME STRAIN RELIEF ASSEMBLY, SIZE II, MINI CPC SIZE A2 CAGE CODE 00779 DRAWING NO. 1546921 RESTRICTED TO - SCALE 4:1 SHEET 1 OF 1 REV 0
MATERIAL -		CUSTOMER DRAWING	